

A woman in a pink dress is seen from behind, standing in a field of tall grass at sunset. She is holding a large, handmade cardboard airplane. The sun is low on the horizon, creating a warm, golden glow. A large orange arc is superimposed over the top half of the image.

**Ferrolì**

**2019-2020**  
Product Catalogue

**CLIMA&COMFORT | RESIDENTIAL**



# CONTENTS

# PRODUCT CATALOGUE

# FERROLI

|                             |     |
|-----------------------------|-----|
| WALL HUNG BOILERS           | 5   |
| FLOOR STANDING BOILER       | 37  |
| LOW NO <sub>x</sub> BURNERS | 81  |
| BIOMASS                     | 91  |
| WATER HEATERS               | 99  |
| SYSTEM COMPONENTS           | 121 |
| RADIATORS                   | 129 |
| SOLAR THERMAL SYSTEMS       | 137 |
| PUFFERS AND STORAGE         | 147 |
| HEAT PUMPS                  | 161 |
| CLIMATIZATION               | 191 |

## IMPORTANT

For installation of room sealed and forced flue boilers and water heaters, use Ferroli original flue gas kits and accessories. Whenever original flue gas accessories are not used, Ferroli will not be held liable in case of anomalies that could jeopardise the function and safety of the system.

**This document includes international standard products and codes. Some products and accessories may differ or not be available in particular geographical areas. For product and code confirmation, commercial conditions, delivery time and eventual minimum lots etc, please refer to Ferroli's commercial representatives. Application of accessories to be checked on respective installation manuals.**

CERTIFIED QUALITY  
SYSTEM



# KEY OF SYMBOLS



Products for replacement with identical model only (restriction valid only in the EU)



Equipment fitted with **low consumption high modulating efficiency circulator (Erp Ready - Class A)**



YOU can **delay burner ignition** by starting it up only when domestic hot water is actually drawn



**Remote control** of boiler parameters via remote control (ROME0)



Ultra high performing “**Blue Forever**” **electrical heating elements** featuring a special surface treatment that almost entirely reduces limescale build-up



This equipment is designed specifically to offer **particularly simple** installation and maintenance



Suitable for operation **outdoors** with a minimum temperature of **-T1°C for the standard version** and, if fitted with the antifrost kit, even **-T2°C**



**Stainless steel** high performance bivalent **primary exchanger**



**F.P.S:** Flue gas **P**rotection **S**ystem. The check valve offers **easy connection to pressurised collective flue systems** (ex. in restructuring), in accordance with regulation UNI 7129



Appliance certified as “**range rated**” according to EN 483



**Stainless steel** high performance mono-thermal **primary exchanger**



**MC<sup>2</sup>:** **M**ulty **C**ombustion **C**ontrol, new combustion system with patented gas-adaptive technology




Electronics features built-in **master-slave cascade** operation, without additional controllers



Stainless steel **exchanger Patented AISI 316 TI**



**M.G.R:** **M**ethane, **L**pg, **P**ropane-air **R**eady, with a simple configuration the boiler can run on natural gas, lpg without the use of any additional conversion kits



Minimum polluting emissions (**class 6 according to EN 15502-1**) already in compliance with the requirements of the ErP directive of 26.09.2018 (NOx emissions < 56mg/kWh)



The device is suitable to be combined with traditional **high temperature** systems; it cannot be combined or installed with direct delivery to systems with low temperature radiant panels



Approved for operation with **50mm diameter flue gas discharge**



Possible connection to an optional outdoor probe, thus enabling **system flow temperature compensation**



Appliance can be combined with preheating systems for the domestic hot water



Exclusive integrated Ferroli “**Thermobalance**”™ combustion cell



It reaches **one of the highest seasonal room heating efficiencies** in its category:  $\eta_s$  **94%**



Generator equipped with devices to **facilitate handling** during shipping and installation



It can operate in combination with **gas or light oil burner**

# WALL HUNG BOILERS



## PRODUCT COMPLIANT WITH ERP (ECODESIGN - LABELLING) REGULATIONS

- Minimum efficiency for DHW/heating (of 26/09/2015)
- Minimum efficiency for pump (of 01/08/2015)

-  CONDENSING
-  TRADITIONAL

## BOILERS

|                      |    |
|----------------------|----|
| BLUEHELIX TOP RRT C  | 6  |
| BLUEHELIX TECH RRT C | 8  |
| BLUEHELIX TECH RRT H | 10 |
| BLUEHELIX PRIMA 24 C | 12 |
| DIVACONDENS D PLUS   | 14 |
| BLUEHELIX K 50       | 16 |
| BLUEHELIX TECH 45 H  | 18 |

## COMMERCIAL GENERATORS

|         |    |
|---------|----|
| FORCE W | 20 |
|---------|----|

## ACCESSORIES

|  |    |
|--|----|
| CONDENSATION LINE FLUE GAS ACCESSORIES | 76 |
|--|----|

## TRADITIONAL

|               |    |
|---------------|----|
| DIVATECH D LN | 26 |
| DIVATECH D    | 28 |
| DIVATECH D HF | 30 |
| DOMINA N      | 32 |
| LEB           | 33 |
| DOMINA F      | 34 |
| FORTUNA       | 35 |

|                   |     |
|-------------------|-----|
| SYSTEM COMPONENTS | 121 |
|-------------------|-----|

# BLUEHELIX TOP RRT C

## WALL HUNG CONDENSATION BOILERS INSTANTANEOUS DHW PRODUCTION



### > STRENGTHS:

- **Boiler** with high thickness stainless steel primary exchanger, with large passes (the largest in the category) guaranteeing duration and reduced maintenance, it maintains high efficiency even on old systems with oxidation and soiling
- A particularly sturdy boiler, suitable for replacements even in particularly critical and resistant systems
- High head, enhanced modulating heating pump on all models also able to adapt to particularly resistant systems (Erp Ready - Class A)
- Enhanced DHW exchanger with high number of plates, particularly immune to clogging and able to maintain constant DHW production capacities over time
- It easily adapts to the load conditions thanks to the **broad modulating range** that can reach **1:12** (mod. 34C, 1:10 mod. 28C)
- **MC<sup>2</sup>: Multi Combustion Control**, new combustion system with industrial-derived gas-adaptive patented technology for better adaptability of use to the varying gas network conditions (ex. pressure fluctuations or drops)
- **M.G.R: Methane, LPG, Propane-Air Ready** with a simple configuration the boiler can run on natural gas, LPG without the use of any additional conversion kits
- **Exclusive exchanger-burner system with self-cooling door**: it simplifies maintenance and lowers the cost thanks to a lower number of parts that need replacing
- **Hydraulic fittings covered** by the boiler jacket, **standard by-pass**


### > ADVANTAGES OF BLUEHELIX TOP RRT C:

- Particularly suitable for operation in flues requiring "heavy duty" pipes thanks to approval for operation with flue gas discharge with a diameter of 50mm
- **F.P.S: Flue gas Protection System**. The flue gas check valve provided by standard offers easy connection to pressurised collective flue systems (ex. in restructuring), in accordance with regulation UNI 7129
- **Designed to simplify and facilitate normal maintenance and cleaning operations**
- **STOP AND GO**: you can **delay burner ignition** by starting it up only when domestic hot water is actually drawn
- **Minimum polluting emissions** (class 6 according to EN 15502-1)
- **Digital flame control** with three ignition tries if operation gets blocked due to failed flame detection (natural gas mod.)
- **Place of installation**: also outdoors, in a partially protected place down to -5°C by standard and even -15°C with the addition of the optional antifrost heating elements kit



| BLUEHELIX TOP RRT                       |                             | 28 C            | 34 C            |
|---|-----------------------------|-----------------|-----------------|
| ERP Class                               | (Class G - A <sup>+</sup> ) |                 |                 |
|   | (Class G - A)               |                 |                 |
| Heating max / min heat input (Hs)       | kW                          | 27.2 / 3.2      | 34 / 3.2        |
| Heating max / min heat output (80/60°C) | kW                          | 24 / 2.8        | 30 / 2.8        |
| Heating max / min heat output (50/30°C) | kW                          | 26 / 3.1        | 32.5 / 3.1      |
| DHW max / min heat input (Hi)           | kW                          | 28.5 / 2.9      | 34.7 / 2.9      |
| DHW max / min heat output               | kW                          | 28.0 / 2.8      | 34.0 / 2.8      |
| Efficiency Pmax / Pmin (80-60°C) (Hi)   | %                           | 98.1 / 98       | 97.9 / 98       |
| Efficiency Pmax / Pmin (50-30°C) (Hi)   | %                           | 106.1 / 107.5   | 106.1 / 107.5   |
| Efficiency 30% (Hi)                     | %                           | 109.7           | 109.5           |
| Max / min heating operating pressure    | bar                         | 3 / 0.8         | 3 / 0.8         |
| DHW max / min operating pressure        | bar                         | 9 / 0.3         | 9 / 0.3         |
| DHW flow rate Δt 25°C                   | l/min                       | 16.1            | 19.5            |
| DHW flow rate Δt 30°C                   | l/min                       | 13.4            | 16.2            |
| Empty weight                            | kg                          | 28              | 32              |
| <b>No. of pieces/pallet</b>             | <b>nr.</b>                  | <b>10</b>       | <b>10</b>       |
| <b>CODE</b>                             | <b>NAT GAS/LPG</b>          | <b>0T3F2XWA</b> | <b>0T3F3XWA</b> |


## BLUEHELIX TOP RRT 28 C

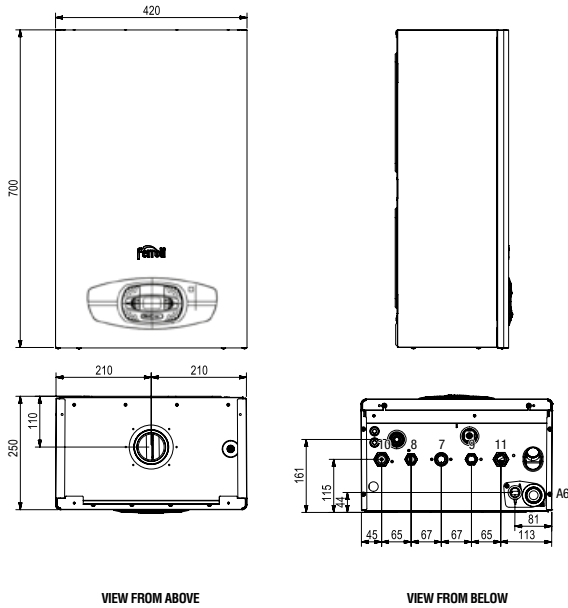

VIEW FROM ABOVE

VIEW FROM BELOW

## BLUEHELIX TOP RRT 34 C

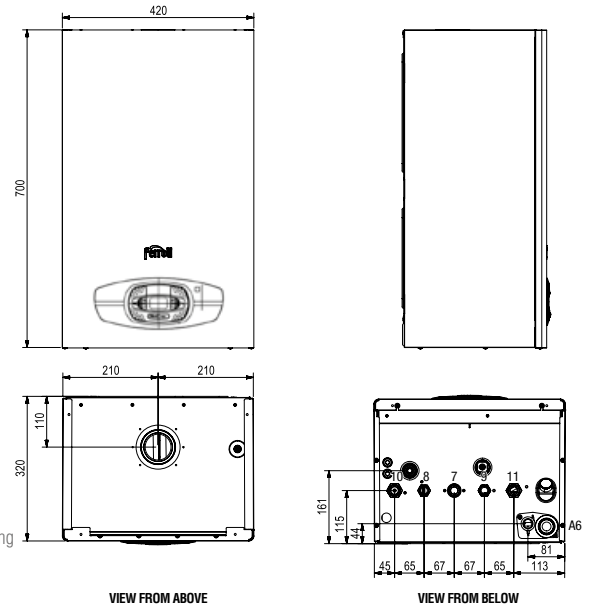




VIEW FROM ABOVE

VIEW FROM BELOW



### > KEY

- 7 3/4" gas inlet
- 8 1/2" DHW outlet
- 9 1/2" DHW inlet
- 10 3/4" system flow
- 11 3/4" system return
- A6 condensation discharge fitting

### > ACCESSORIES FOR FLUES DIAMETER Ø 50 MM

| DESCRIPTION   | CODE     |
|---|----------|
|  Extension 1 m Ø 50 twin pipes                      | 041086X0 |
|  Bend 90° Ø 50 twin pipes                         | 041085X0 |
|  Reduction from Ø 80 to Ø 50 twin pipes (1 piece) | 041087X0 |

### > HYDRAULIC AND CONTROL ACCESSORIES - STARTING FLUE ACCESSORIES

| DESCRIPTION  | CODE     |
|--|----------|
|  galvanised template  | 046049X0 |
|  kit for connection of fittings complete with gas tap with cone, DHW tap, 2 system taps, pipes, nipple, gaskets | 012043W0 |
|  kit for connection of 5 pipe fittings<br>nb: the kit does not include taps and connection nipples              | 012047W0 |
|  outdoor probe  | 013018X0 |
|  thermostatic mixer kit 1/2" connections  | 013002X0 |

| DESCRIPTION  | CODE     |
|--|----------|
|  90° coaxial bend, 360° swivel with 45° pitch Ø 100/60 mm for condensing boilers | 041084X0 |
|  coupling for vertical coaxial pipe Ø 80/125 mm for condensing boilers           | 041006X0 |
|  coupling for vertical coaxial pipe Ø 100/60 mm for condensing boilers           | 041083X0 |
|  discharge kit twin pipes 80/80 for condensing boilers complete with test point  | 041082X0 |
|  auxiliary antifrost kit down to -15°C   | 013022X0 |

# BLUEHELIX TECH RRT C WALL HUNG CONDENSATION BOILERS INSTANTANEOUS DHW PRODUCTION



## > STRENGTHS:

- Careful design of aesthetics and silent operation, it maintains the legacy of appreciation of the previous "Bluehelix" series
- Boiler with high thickness stainless steel primary exchanger, with large passes (the largest in the category) guaranteeing duration and reduced maintenance, it maintains high efficiency even on old systems with oxidation and soiling
- MC<sup>2</sup>: Multi Combustion Control, new combustion system with industrial-derived gas-adaptive patented technology for better adaptability of use to the varying gas network conditions (ex. pressure fluctuations or drops)
- M.G.R: Methane, LPG, Propane-air Ready with a simple configuration the boiler can run on natural gas, LPG without the use of any additional conversion kits
- Exclusive exchanger-burner system with self-cooling door: it simplifies maintenance and lowers the cost thanks to a lower number of parts that need replacing
- Instantaneous production of domestic hot water with a dedicated DHW plate exchanger
- Hydraulic fittings covered by the boiler jacket
- Large multi-purpose backlit graphic display to set parameters easily and correctly
- By-pass with standard supply

## > ADVANTAGES OF BLUEHELIX TECH RRT C:

- Particularly suitable for operation in flues requiring "heavy duty" pipes thanks to approval for operation with flue gas discharge with a diameter of 50mm
- F.P.S: Flue gas Protection System. The flue gas check valve provided by standard offers easy connection to pressurised collective flue systems (ex. in restructuring), in accordance with regulation UNI 7129
- Designed to simplify and facilitate normal maintenance and cleaning operations
- Solar system set up: set up for the production of domestic hot water combined with solar panel systems
- STOP AND GO: you can delay burner ignition by starting it up only when domestic hot water is actually drawn
- Certified 3-star comfort in DHW production mode in accordance with EN 13203
- Minimum polluting emissions (class 6 according to EN 15502-1)
- Sliding temperature operating mode through outdoor probe (optional)
- Low consumption modulating heat pump (ErP Ready - Class A)
- Digital flame control with three ignition tries if operation gets blocked due to failed flame detection (natural gas mod.)
- Place of installation: also outdoors, in a partially protected place down to -5°C by standard and even -15°C with the addition of the optional antifrost heating elements kit

**COLLECTIVE PRESSURISED**

**MULTI COMB. CONTROL**

**EXCHANGER STAINLESS STEEL**

**EASY MAINTENANCE**

**FLUE GAS 50mm**

**METHANE LPG READY**

**STOP AND GO**

**CLIMATIC**

**MODE SUN EASY**

**DHW**

**ETA<sub>s</sub> 94%**

**CLASS 6**


**PROTECTED**

**REMOTE**

| BLUEHELIX TECH RRT                     |                             | 24 C            | 28 C            | 34 C            |
|--|-----------------------------|-----------------|-----------------|-----------------|
| ERP Class                              | (Class G - A <sup>+</sup> ) | <b>A</b>        | <b>A</b>        | <b>A</b>        |
|  | (Class G - A)               | <b>XL A</b>     | <b>XL A</b>     | <b>XXL A</b>    |
| Heating max /min heat input (Hs)       | kW                          | 22.7 / 5.6      | 24.5 / 5        | 34.0 / 7.1      |
| Heating max /min heat output (80/60°C) | kW                          | 20 / 4.9        | 24 / 4.9        | 30 / 6.3        |
| Heating max /min heat output (50/30°C) | kW                          | 21.7 / 5.4      | 26 / 5.4        | 32.5 / 6.9      |
| DHW max / min heat input (Hi)          | kW                          | 25 / 5          | 28.5 / 5        | 34.7 / 6.4      |
| DHW max / min heat output              | kW                          | 24.5 / 4.9      | 28.0 / 4.9      | 34.0 / 6.3      |
| Efficiency Pmax / Pmin (80-60°C) (Hi)  | %                           | 98 / 97.8       | 98.1 / 98       | 98 / 97.8       |
| Efficiency Pmax / Pmin (50-30°C) (Hi)  | %                           | 106.1 / 107.5   | 106.1 / 107.5   | 106.1 / 107.5   |
| Efficiency 30% (Hi)                    | %                           | 109.8           | 109.7           | 109.8           |
| Max / min heating operating pressure   | bar                         | 3 / 0.8         | 3 / 0.8         | 3 / 0.8         |
| DHW max / min operating pressure       | bar                         | 9 / 0.3         | 9 / 0.3         | 9 / 0.3         |
| DHW flow rate Δt 25°C                  | l/min                       | 14              | 16.1            | 19.5            |
| DHW flow rate Δt 30°C                  | l/min                       | 11.7            | 13.4            | 16.2            |
| Empty weight                           | kg                          | 28              | 28              | 32              |
| <b>No. of pieces/pallet</b>            | <b>nr.</b>                  | <b>10</b>       | <b>10</b>       | <b>10</b>       |
| <b>CODE</b>                            | <b>NAT GAS/LPG</b>          | <b>0T3B2BWA</b> | <b>0T3B2AWA</b> | <b>0T3B3AWA</b> |



## BLUEHELIX TECH RRT 24 / 28 C

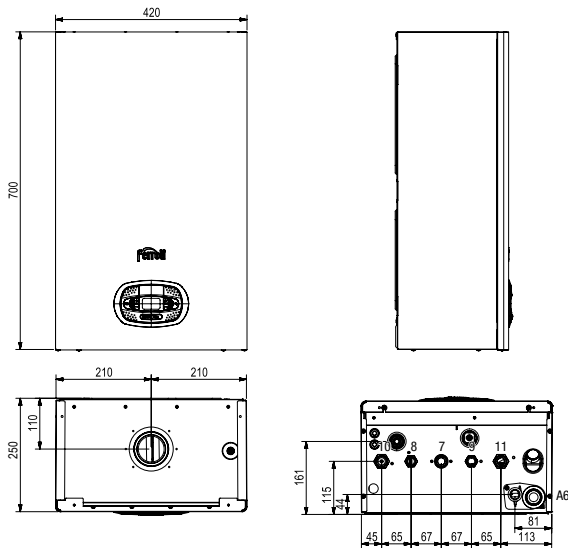


VIEW FROM ABOVE

VIEW FROM BELOW

### > KEY

- 7 3/4" gas inlet
- 8 1/2" DHW outlet
- 9 1/2" DHW inlet
- 10 3/4" system flow
- 11 3/4" system return
- A6 condensation discharge fitting

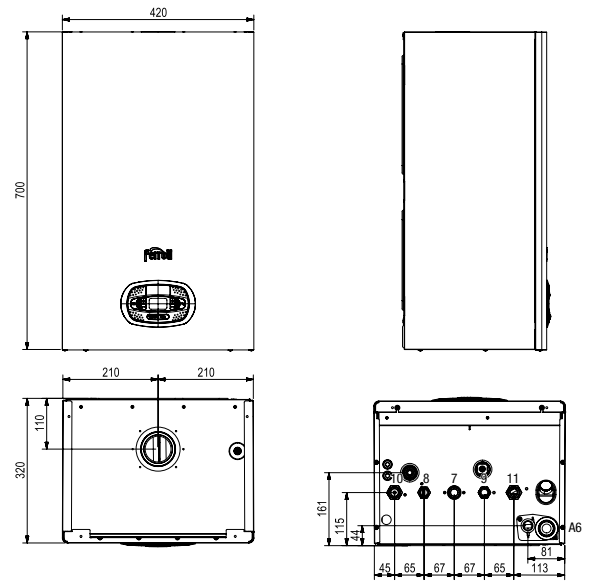


## BLUEHELIX TECH RRT 34 C








VIEW FROM ABOVE

VIEW FROM BELOW

### > ACCESSORIES FOR FLUES DIAMETER Ø 50 MM

| DESCRIPTION   | CODE     |
|---|----------|
|  Extension 1 m ø 50 twin pipes                      | 041086X0 |
|  Bend 90° ø 50 twin pipes                         | 041085X0 |
|  Reduction from ø 80 to ø 50 twin pipes (1 piece) | 041087X0 |

### > HYDRAULIC AND CONTROL ACCESSORIES - STARTING FLUE ACCESSORIES

| DESCRIPTION  | CODE     |
|--|----------|
|  galvanised template  | 046049X0 |
|  kit for connection of fittings complete with gas tap with cone, DHW tap, 2 system taps, pipes, nipple, gaskets | 012043W0 |
|  kit for connection of 5 pipe fittings nb: the kit does not include taps and connection nipples                 | 012047W0 |
|  outdoor probe  | 013018X0 |
|  thermostatic mixer kit 1/2" connections  | 013002X0 |

| DESCRIPTION  | CODE     |
|--|----------|
|  90° coaxial bend, 360° swivel with 45° pitch ø 100/60 mm for condensing boilers | 041084X0 |
|  coupling for vertical coaxial pipe ø 80/125 mm for condensing boilers           | 041006X0 |
|  coupling for vertical coaxial pipe ø 100/60 mm for condensing boilers           | 041083X0 |
|  discharge kit twin pipes 80/80 for condensing boilers complete with test point  | 041082X0 |
|  auxiliary antifrost kit down to -15°C   | 013022X0 |

# BLUEHELIX TECH RRT H WALL HUNG CONDENSATION BOILERS HEATING ONLY



## > STRENGTHS:

- Careful design of aesthetics and silent operation, it maintains the legacy of appreciation of the previous "Bluehelix" series
- Boiler with high thickness stainless steel primary exchanger, with large passes (the largest in the category) guaranteeing duration and reduced maintenance, it maintains high efficiency even on old systems with oxidation and soiling
- MC<sup>2</sup>: Multi Combustion Control, new combustion system with industrial-derived gas-adaptive patented technology for better adaptability of use to the varying gas network conditions (ex. pressure fluctuations or drops)
- M.G.R: Methane, LPG, Propane-air Ready with a simple configuration the boiler can run on natural gas, LPG without the use of any additional conversion kits
- Exclusive exchanger-burner system with self-cooling door: it simplifies maintenance and lowers the cost thanks to a lower number of parts that need replacing
- DHW production combined with storage tank (optional), 3-way valve with standard supply in boiler
- Hydraulic fittings covered by the boiler jacket
- Large multi-purpose backlit graphic display to set parameters easily and correctly
- By-pass with standard supply

## > ADVANTAGES OF BLUEHELIX TECH RRT H:

- Particularly suitable for operation in flues requiring "heavy duty" pipes thanks to approval for operation with flue gas discharge with a diameter of 50mm
- F.P.S: Flue gas Protection System. The flue gas check valve provided by standard offers easy connection to pressurised collective flue systems (ex. in restructuring), in accordance with regulation UNI 7129
- Designed to simplify and facilitate normal maintenance and cleaning operations
- Minimum polluting emissions (class 6 according to EN 15502-1)
- Sliding temperature operating mode through outdoor probe (optional)
- Low consumption modulating heat pump (ErP Ready - Class A)
- Digital flame control with three ignition tries if operation gets blocked due to failed flame detection (natural gas mod.)
- Place of installation: also outdoors, in a partially protected place down to -5°C by standard and even -15°C with the addition of the optional antifrost heating elements kit

COLLECTIVE PRESSURISED

MULTI COMB. CONTROL

EASY MAINTENANCE

FLUE GAS Ø 50mm

METHANE LPG READY

EXCHANGER STAINLESS STEEL

CLIMATIC

ETA<sub>9</sub> 94%


CLASS 6

PROTECTED

REMOTE

| BLUEHELIX TECH RRT                      |                             | 24 H            | 30 H            |
|---|-----------------------------|-----------------|-----------------|
| ERP Class                               | (Class G - A <sup>+</sup> ) | <b>A</b>        | <b>A</b>        |
| Heating max / min heat input (Hs)       | kW                          | 24.5 / 5.0      | 30.6 / 6.4      |
| Heating max / min heat output (80/60°C) | kW                          | 24 / 4.9        | 30 / 6.3        |
| Heating max / min heat output (50/30°C) | kW                          | 26.0 / 5.4      | 32.5 / 6.9      |
| Efficiency Pmax / Pmin (80-60°C) (Hi)   | %                           | 98.1 / 98.0     | 97.9 / 98.0     |
| Efficiency Pmax / Pmin (50-30°C) (Hi)   | %                           | 106.1 / 107.5   | 106.1 / 107.5   |
| Efficiency 30% (Hi)                     | %                           | 109.7           | 109.5           |
| Max / min heating operating pressure    | bar                         | 3 / 0.8         | 3 / 0.8         |
| Empty weight                            | kg                          | 28              | 31              |
| <b>No. of pieces/pallet</b>             | <b>nr.</b>                  | <b>10</b>       | <b>10</b>       |
| <b>CODE</b>                             | <b>NAT GAS/LPG</b>          | <b>0T3D2BWA</b> | <b>0T3D3AWA</b> |

## BLUEHELIX TECH RRT 24 H

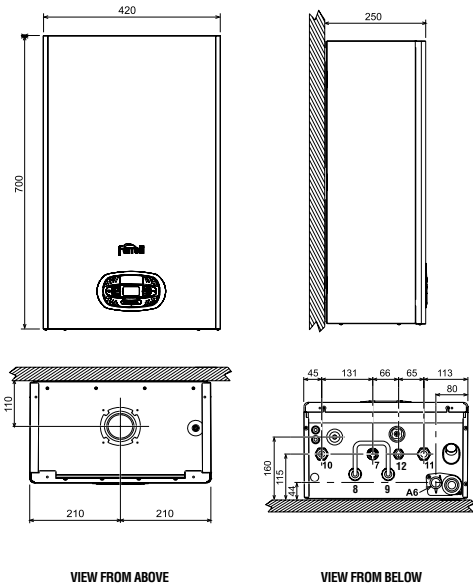


VIEW FROM ABOVE

VIEW FROM BELOW

### > KEY

- 7 3/4" gas inlet
- 8 3/4" DHW outlet
- 9 3/4" DHW inlet
- 10 3/4" system flow
- 11 3/4" system return
- 12 1/2" system filling fitting
- A6 condensation discharge fitting

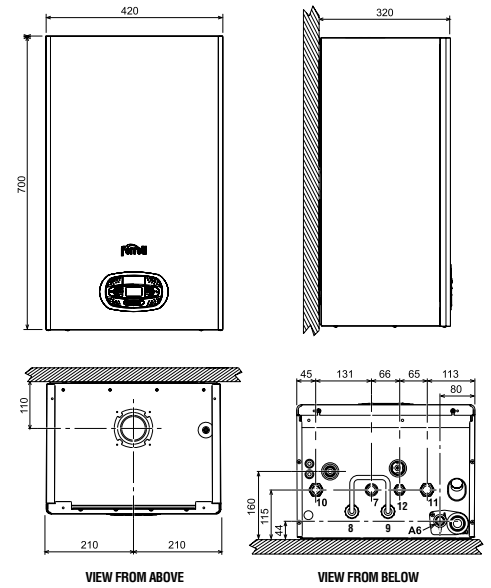


## BLUEHELIX TECH RRT 30 H



VIEW FROM ABOVE

VIEW FROM BELOW

### > ACCESSORIES FOR FLUES DIAMETER Ø 50 MM

|  | DESCRIPTION                                      | CODE     |
|--|--|----------|
|  | Extension 1 m Ø 50 twin pipes                    | 041086X0 |
|  | Bend 90° Ø 50 twin pipes                         | 041085X0 |
|  | Reduction from Ø 80 to Ø 50 twin pipes (1 piece) | 041087X0 |

### > HYDRAULIC AND CONTROL ACCESSORIES - STARTING FLUE ACCESSORIES

|   | DESCRIPTION   | CODE     |
|---|---|----------|
|  | 90° coaxial bend, 360° swivel with 45° pitch Ø 100/60 mm for condensing boilers | 041084X0 |
|  | coupling for vertical coaxial pipe Ø 80/125 mm for condensing boilers           | 041006X0 |
|  | outdoor probe   | 013018X0 |
|  | thermostatic mixer kit 1/2" connections   | 013002X0 |

|  | DESCRIPTION  | CODE      |          |
|--|--|-----------|----------|
|  | coupling for vertical coaxial pipe Ø 100/60 mm for condensing boilers          | 041083X0  |          |
|  | discharge kit twin pipes 80/80 for condensing boilers complete with test point | 041082X0  |          |
|  | auxiliary antifrost kit down to -15°C  | 013022X0  |          |
|  | additional sensor for managing any external storage tank                       | 2 m cable | 1KWMA11W |
|  |  | 5 m cable | 043005X0 |

# BLUEHELIX PRIMA 24 C

WALL HUNG CONDENSATION BOILERS  
INSTANTANEOUS DHW PRODUCTION




## > STRENGTHS:

- Boiler with single-circuit stainless steel primary exchanger without joints and/or welding, it maintains high efficiency also on old systems.
- **MC<sup>2</sup>: Multi Combustion Control**, new combustion system with industrial-derived gas-adaptive patented technology for better adaptability of use to the varying gas network conditions (ex. pressure fluctuations or drops)
- **M.G.R: Methane, LPG, Propane-air Ready** with a simple configuration the boiler can run on natural gas, LPG without the use of any additional conversion kits
- **Instantaneous production** of domestic hot water with a **dedicated** DHW plate exchanger
- User interface with display and multi-purpose keys to adjust and set the parameters
- **By-pass with standard supply**


## > ADVANTAGES OF BLUEHELIX PRIMA 24 C:

- **Solar system set up:** set up for the production of domestic hot water combined with solar panel systems
- **Minimum polluting emissions** (class 6 according to EN 15502-1)
- **Sliding temperature operating mode** through outdoor probe (optional)
- **Low consumption modulating** circulator (ErP Ready - Class A)
- **Digital flame control** with three ignition tries if operation gets blocked due to failed flame detection (natural gas mod.)
- **Place of installation:** also outdoors, in a partially protected place down to -5°C by standard and even -15°C with the addition of the optional antifrost heating elements kit



| BLUEHELIX PRIMA                        |                             |  | 24 C           |
|--|-----------------------------|--|----------------|
| ERP Class                              | (Class G - A <sup>+</sup> ) |  | <b>A</b>       |
|  | (Class G - A)               |  | <b>A</b>       |
| Heating max /min heat input (Hs)       | kW                          |  | 22.9 / 4.7     |
| Heating max /min heat output (80/60°C) | kW                          |  | 20.0 / 4.1     |
| Heating max /min heat output (50/30°C) | kW                          |  | 21.8 / 4.5     |
| DHW max / min heat input (Hi)          | kW                          |  | 25.0 / 4.2     |
| DHW max / min heat output              | kW                          |  | 24.3 / 4.1     |
| Efficiency Pmax / Pmin (80-60°C) (Hi)  | %                           |  | 97.1 / 97.0    |
| Efficiency Pmax / Pmin (50-30°C) (Hi)  | %                           |  | 105.8 / 106.9  |
| Efficiency 30% (Hi)                    | %                           |  | 108.8          |
| Max / min heating operating pressure   | bar                         |  | 3 / 0.8        |
| DHW max / min operating pressure       | bar                         |  | 9 / 0.3        |
| DHW flow rate Δt 25°C                  | l/min                       |  | 14             |
| DHW flow rate Δt 30°C                  | l/min                       |  | 11.7           |
| Empty weight                           | kg                          |  | 25             |
| <b>No. of pieces/pallet</b>            | <b>nr.</b>                  |  | <b>10</b>      |
| <b>CODE</b>                            | <b>NAT GAS/LPG</b>          |  | <b>OTP2AWA</b> |

## BLUEHELIX PRIMA 24 C

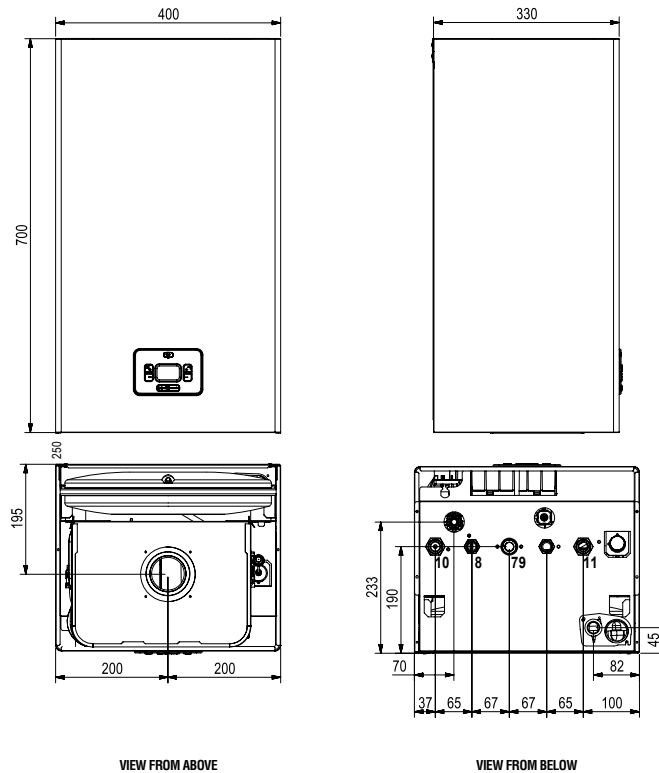





VIEW FROM ABOVE

VIEW FROM BELOW

### > KEY

- 7 3/4" gas inlet
- 8 1/2" DHW outlet
- 9 1/2" DHW inlet
- 10 3/4" system flow
- 11 3/4" system return

## > HYDRAULIC AND CONTROL ACCESSORIES - STARTING FLUE ACCESSORIES

|   | DESCRIPTION   | CODE     |
|---|---|----------|
|  | kit for connection of fittings complete with gas tap with cone, DHW tap, pipes, nipple, gaskets   | 012048W0 |
|  | kit for connection of 5 pipe fittings<br>nb: the kit does not include taps and connection nipples | 012049W0 |
|  | outdoor probe   | 013018X0 |
|  | thermostatic mixer kit<br>1/2" connections  | 013002X0 |

|  | DESCRIPTION   | CODE     |
|--|---|----------|
|  | 90° coaxial bend, 360° swivel with 45° pitch ø 100/60 mm for condensing boilers   | 041084X0 |
|  | coupling for vertical coaxial pipe ø 80/125 mm for condensing boilers             | 041006X0 |
|  | coupling for vertical coaxial pipe ø 100/60 mm for condensing boilers             | 041083X0 |
|  | discharge kit<br>twin pipes 80/80 for condensing boilers complete with test point | 041082X0 |
|  | auxiliary antifrost kit down to -15°C   | 013022X0 |

# DIVACONDENS D PLUS

WALL HUNG ATMOSPHERIC CONDENSING BOILERS,  
WITH INSTANTANEOUS DHW PRODUCTION - LOW NO<sub>x</sub>

ERP





## > STRENGTHS:

- Condensing boiler to heat **high temperature systems** and for domestic hot water production. It is not suitable to be directly connected to underfloor systems, use of mixing valves
- **Primary heat exchanger** with a compact shape
- **Instantaneous production** of domestic hot water with a **dedicated plate exchanger**
- **Flue recovery facility** of the latent condensation heat. Pre-heats system return before primary exchanger
- Boiler with a watertight chamber and forced draught, with **low NO<sub>x</sub> emissions atmospheric burner**, AISI 304 stainless steel
- Standard hydraulic **by-pass**
- **High efficiency and low consumption circulator** (ErP - Class A) with block protection system by being activated for a few seconds every 24 hours of inactivity
- Can be combined with the **modulating remote control**
- Simple and complete control panel, user interface with **display** and setting **keys**


## > ADVANTAGES OF DIVACONDENS D PLUS:

- Robust post-condenser supplied by the closed circuit of the primary, namely **with no external mains water inlet**. The heat exchange with the flue gas takes place inside large diameter water passages.
- Generator of **simple and rational operation**
- **Condensate collection device** that protects the air pressure switch, for regular combustion even in very harsh outdoor temperatures
- **ECO** function in domestic mode for more **savings** when hot water is not really used
- **Solar system set up:** set up for the production of domestic hot water combined with solar panel systems
- **Place of installation:** also for outdoor use in a partially protected place that is up to -5°C, as standard



| MODEL                         |                           |                             | 24               |
|-------------------------------|---------------------------|-----------------------------|------------------|
| ERP Class                     |                           | (Class G - A <sup>+</sup> ) | <b>B</b>         |
|                               |                           | (Class G - A)               | <b>A</b>         |
| Heat input (L.C.V.)           | Heating Min / Max         | kW                          | 10.0 / 25.0      |
| Heat output 80°C-60°C         | Heating Min / Max         | kW                          | 9.2 / 24.1       |
|                               | DHW Max                   | kW                          | 24.1             |
| 50°C-30°C                     | Heating Min / Max         | kW                          | 9.6 / 25.9       |
|                               | Useful thermal efficiency | 80°C-60°C                   | Pmax % / Pmin %  |
|                               | 50°C-30°C                 | Pmax % / Pmin %             | 103.5 / 96.0     |
|                               | 30% partial load          | Pmax %                      | 103.5            |
| NO <sub>x</sub> Emissions     |                           |                             | 6                |
| Domestic hot water production | Δt 30°C                   | l/min                       | 11.6             |
|                               | Δt 25°C                   | l/min                       | 14.0             |
| Heating operating pressure    | Max / Min                 | bar                         | 3 / 0.8          |
| Empty weight                  |                           | kg                          | 35               |
| <b>No. of pieces/pallet</b>   |                           | <b>nr.</b>                  | <b>10</b>        |
| <b>CODE</b>                   | <b>NATURAL GAS</b>        |                             | <b>OC CR4YWA</b> |


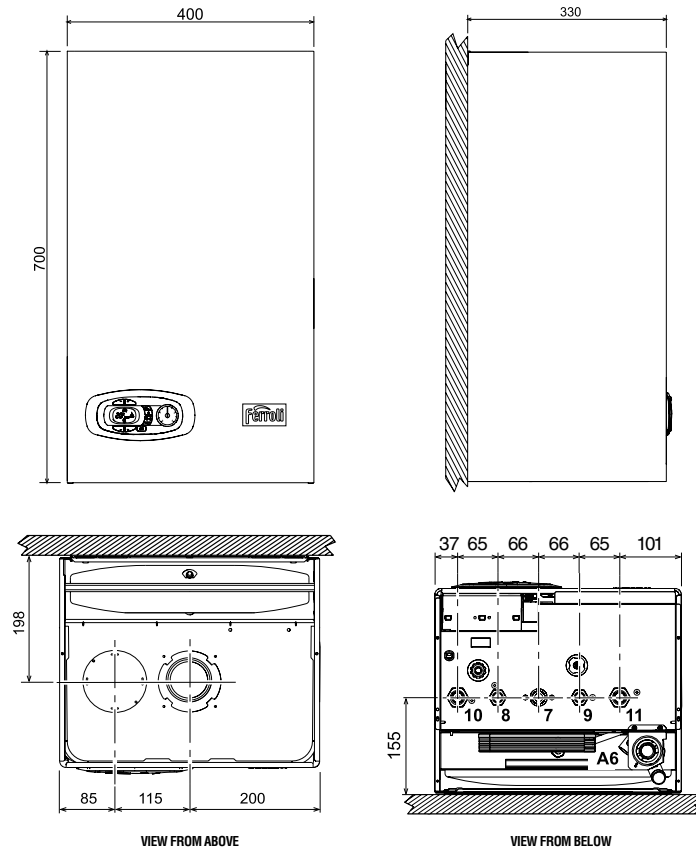


## DIVACONDENS D PLUS F 24



### > KEY

- 7 Gas inlet - Ø 3/4"
- 8 DHW water outlet - Ø 1/2"
- 9 DHW inlet - Ø 1/2"
- 10 System flow - Ø 3/4"
- 11 System return - Ø 3/4"
- A6 Condensate discharge connection

## > HYDRAULIC AND CONTROL ACCESSORIES - STARTING FLUE ACCESSORIES

| DESCRIPTION   | CODE     |
|---|----------|
|  <p>kit for connection of fittings complete with gas tap with cone, DHW tap, 2 system taps, pipes, nipple, gaskets</p> | 012040W0 |
|  <p>kit for connection of 5 pipe fittings<br/>NB: the kit does not include taps and connection nipples</p>             | 012047W0 |
|  <p>thermostatic mixer kit<br/>1/2" connections</p>  | 013002X0 |
|  <p>outdoor probe</p>  | 013018X0 |

| DESCRIPTION   | CODE     |
|---|----------|
|  <p>90° coaxial bend, 360° swivel with 45° pitch ø 100/60 mm for condensing boilers</p> | 041084X0 |
|  <p>coupling for vertical coaxial pipe ø 80/125 mm for condensing boilers</p>           | 041006X0 |
|  <p>coupling for vertical coaxial pipe ø 100/60 mm for condensing boilers</p>           | 041083X0 |
|  <p>discharge kit twin pipes 80/80 for condensing boilers complete with test point</p>  | 041039X0 |

# BLUEHELIX K 50 CONDENSING WALL HUNG BOILER, STAINLESS STEEL DHW STORAGE

ERP



## > STRENGTHS:

- It reaches **one of the highest seasonal space heating efficiencies** in its category:  $\eta_s$  94%
- **A<sup>+</sup> SYSTEM**: combined with the modulating remote control and the outdoor probe (optional) it reaches the top efficiency class **A<sup>+</sup>** (scale from G to A<sup>++</sup>)
- **Stainless steel** primary heat exchanger
- **DHW production** with 50-litre stainless steel storage tank
- Set-up for **recirculation fittings** (provided with the accessory: fitting connection kit)
- **Stainless steel full pre-mixing burner** with broad modulating range
- **Low consumption modulating heat pump (ErP Ready - Class A)**
- **Digital commands with user interface display**, multi-purpose for easily and correctly entering parameters
- **Can be combined with the modulating remote control**

## > ADVANTAGES OF BLUEHELIX K 50:


- **Minimum polluting emissions** (class 6 according to EN 15502-1)
- **Sliding temperature operating mode** in combination with the optional outdoor probe
- **Certified 3-star comfort** in DHW production mode in accordance with EN 13203, set forth by Reg. 812/2013
- **Exchanger protection function** with  $\Delta t$  control
- **Antilegionella function** with programmable timing
- **Timed block protection** for circulator and three-way valve
- **Digital flame control** with three reignition tries if operation gets blocked due to failed flame detection (only in natural gas mode)
- **Antifrost function** with standard protection down to  $-5^{\circ}\text{C}$



| MODEL                         |                              |                              | 25 K 50            | 32 K 50            |                    |
|-------------------------------|------------------------------|------------------------------|--------------------|--------------------|--------------------|
| ERP Class                     |                              | (Class G - A <sup>++</sup> ) | <b>A</b>           | <b>A</b>           |                    |
|                               |                              | (Class G - A)                | <b>A</b>           | <b>A</b>           |                    |
| Heat input (L.C.V.)           | Heating Min / Max<br>DHW Max | kW<br>kW                     | 5.8 / 25.0<br>27.5 | 6.7 / 29.5<br>32.0 |                    |
| Heat output                   | 80°C-60°C                    | Heating Min / Max<br>DHW Max | kW<br>kW           | 5.7 / 24.5<br>27.0 | 6.6 / 28.9<br>32.0 |
|                               | 50°C-30°C                    | Heating Min / Max            | kW                 | 6.2 / 26.5         | 7.2 / 31.3         |
| Useful thermal efficiency     | 80°C-60°C                    | Pmax % / Pmin %              | 98.0 / 97.8        | 98.0 / 97.8        |                    |
|                               | 50°C-30°C                    | Pmax % / Pmin %              | 106.1 / 107.5      | 106.1 / 107.5      |                    |
|                               | Reduced load 30%             | Pmax %                       | 108.8              | 108.8              |                    |
| Nox emissions class           |                              | class                        | 6                  | 6                  |                    |
| Storage tank capacity         |                              | litres                       | 50                 | 50                 |                    |
| Domestic hot water production | $\Delta t$ 30°C              | l/10 min                     | 175                | 195                |                    |
|                               | $\Delta t$ 30°C              | l/h                          | 820                | 945                |                    |
| Heating operating pressure    | Max                          | bar                          | 3                  | 3                  |                    |
| Domestic operating pressure   | Max                          | bar                          | 9                  | 9                  |                    |
| Empty weight                  |                              | kg                           | 61                 | 80                 |                    |
| <b>No. of pieces/pallet</b>   |                              | <b>nr.</b>                   | <b>10</b>          | <b>10</b>          |                    |
| <b>CODE</b>                   |                              | <b>NATURAL GAS</b>           | <b>OTAX2AWA</b>    | <b>OTAX3AWA</b>    |                    |



## BLUEHELIX 25 / 32 K 50

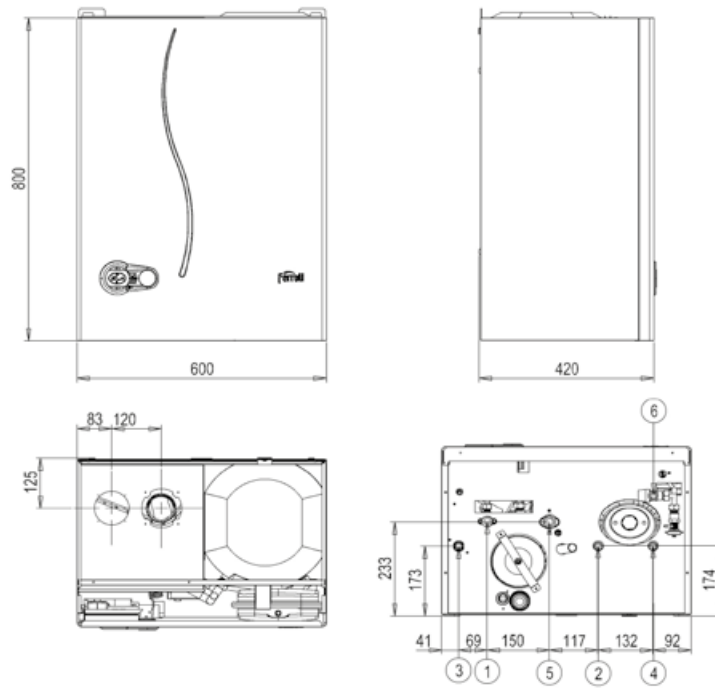

VIEW FROM ABOVE

VIEW FROM BELOW

### > KEY

- 1 3/4" heating system flow
- 2 1/2" DHW outlet
- 3 1/2" gas inlet

- 4 1/2" DHW inlet
- 5 3/4" heating system return
- 6 safety valve discharge

## > HYDRAULIC AND CONTROL ACCESSORIES - STARTING FLUE ACCESSORIES

|   | DESCRIPTION   | CODE     |
|---|---|----------|
|  | galvanised template   | 056004X0 |
|  | kit for connection of fittings complete with gas tap with cone, DHW tap, 2 system taps, pipes, nipple, gaskets, recirculation fitting | 052003X0 |
|  | fitting cover sheet metal   | 056005X0 |
|  | outdoor probe   | 013018X0 |
|  | thermostatic mixer kit 1/2" connections   | 013002X0 |

|  | DESCRIPTION   | CODE     |
|--|---|----------|
|  | coupling for vertical coaxial pipe ø 100/60 mm for condensing boilers           | 041002X0 |
|  | coupling for vertical coaxial pipe ø 80/125 mm for condensing boilers           | 041006X0 |
|  | 90° coaxial bend, 360° swivel with 45° pitch ø 100/60 mm for condensing boilers | 041001X0 |
|  | discharge kit twin pipes 80/80 for condensing boilers complete with test point  | 041039X0 |

# BLUEHELIX TECH S 45 H WALL HUNG CONDENSING BOILERS, HEATING ONLY





## > STRENGTHS:

- **Boiler body** with high thickness stainless steel primary exchanger
- **Stainless steel full pre-mixing burner**
- Digital control **panel**
- **Electronic flame modulation** in heating and in DHW
- Can be combined with the **modulating remote control**
- Large **multi-purpose backlit graphic display** to set parameters easily and correctly
- **By-pass** with standard supply
- **Elegant design and compact size**
- **Outer casing** coated with white anaphoresis epoxy powders


## > ADVANTAGES OF BLUEHELIX TECH 45 H:

- **ECO** function in domestic mode for more **savings** when hot water is not really used
- **Sliding temperature operating mode** through outdoor probe (optional)
- **Minimum polluting emissions** (class 6 according to EN 15502-1)
- **Low consumption** modulating **heat pump (ErP Ready - Class A)**
- **Digital flame control** with three ignition tries if operation gets blocked due to failed flame detection (natural gas mod.)



| MODEL                              |  |                             | S 45 H                   |
|------------------------------------|--|-----------------------------|--------------------------|
| ERP Class                          |  | (Class G - A <sup>+</sup> ) | <b>A</b>                 |
| Heat input (L.C.V.)                | Heating Min / Max<br>DHW Max           | kW<br>kW                    | 7.5 / 43.0<br>-          |
| Heat output 80°C-60°C<br>50°C-30°C | Heating Min / Max<br>Heating Min / Max | kW<br>kW                    | 7.3 / 42.1<br>8.0 / 45.6 |
| Useful thermal efficiency          | 80°C-60°C                              | Pmax % / Pmin %             | 98.0 / 97.8              |
|                                    | 50°C-30°C                              | Pmax % / Pmin %             | 106.1 / 107.5            |
|                                    | 30% partial load                       | Pmax %                      | 108.8                    |
| Domestic hot water production      | Δt 30°C                                | l/min                       | -                        |
|                                    | Δt 25°C                                | l/min                       | -                        |
| Heating operating pressure         | Max / Min                              | bar                         | 4.5 / 0.8                |
| Empty weight                       |  | kg                          | 33.5                     |
| <b>No. of pieces/pallet</b>        |  | <b>nr.</b>                  | <b>10</b>                |
| <b>CODE</b>                        |  | <b>NATURAL GAS</b>          | <b>OT2D5IWA</b>          |

## BLUEHELIX TECH S 45 H

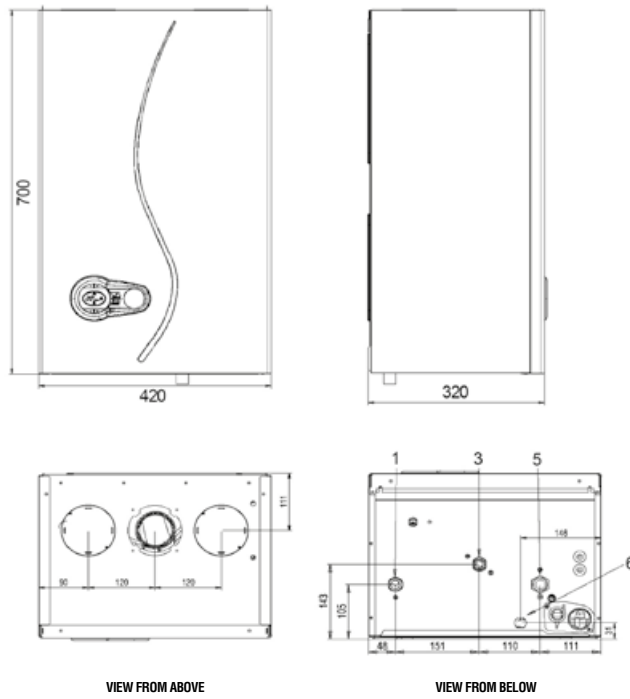

### > KEY

- 1 3/4" heating system flow
- 2 3/4" storage tank delivery
- 3 1/2" gas inlet
- 4 3/4" storage tank return
- 5 3/4" heating system return
- 6 safety valve

## > HYDRAULIC AND CONTROL ACCESSORIES - STARTING FLUE ACCESSORIES

| DESCRIPTION   | CODE     |
|---|----------|
|  outdoor probe   | 013018X0 |
|  kit for management with thermostat (not supplied) of a dhw storage tank | 013017X0 |

| DESCRIPTION   | CODE         |          |
|---|--------------|----------|
|  coupling for vertical coaxial pipe<br>ø 100/60 mm<br>for condensing boilers              | 041002X0     |          |
|  coupling for vertical coaxial pipe<br>ø 80/125 mm<br>for condensing boilers              | 041006X0     |          |
|  90° coaxial bend,<br>360° swivel with 45° pitch<br>ø 100/60 mm<br>for condensing boilers | 041001X0     |          |
|  discharge kit<br>twin pipes 80/80<br>for condensing boilers complete<br>with test point  | 041039X0     |          |
|  additional sensor for<br>managing any external<br>storage tank                           | cable<br>2 m | 1KWMA11W |
|   | cable<br>5 m | 043005X0 |

# FORCE W

ERP



## CONDENSATION THERMAL MODULES FOR CASCADE SYSTEMS FROM POWER PLANT

### > STRENGTHS:


- **High power condensation thermal module**, designed for single installations or in cascades up to 600 kW
- **Hydraulic, gas and flue gas accessories** for cascade installation with 2, 3 and 4 modules
- Heat exchanger with pre-assembled elements in **aluminium-silicon alloy** designed to achieve maximum exchange efficiency and low pressure drops on the water circuit
- Full pre-mixing **combustion unit** with metal fibre micro-flame burner with very low polluting emissions (**Class 6** according to EN 15502-1). The modules can run on **Natural Gas and LPG**
- **Generator protection systems:**
  - \* Double sensor (delivery and return) system for operation at **ΔT constant** (reg. from 0 to 60°C)
  - \* Exchanger overtemperature protection sensor calibrated to 95°C
  - \* Flue gas safety sensor
  - \* Water pressure switch with minimum threshold of 0.8 bar
- Hydraulic unit (provided as accessory) with three-way shut-off valve for discharge into the atmosphere and possibility of choosing between two **circulators, standard and high head**
- Air / Flue gas circuit with intake in the installation site and **check valve** on the flue gas ejection duct to size the pressurised manifold

### > ADVANTAGES OF FORCE W:

- Module cascade management with **self-configuring Master / Slave system** and possibility of setting the generator on/off sequence
- Electronics on board the machine to manage a **system with two direct zones and one DHW storage** or systems with differentiated temperatures (direct and mixed) in combination with the FZ4 B temperature control unit
- **Range Rated** certified generator to adjust the generated power to the system's needs by increasing the efficiency of the system and preserving the mechanics of the machine
- The modules can be controlled and conducted remotely:
  - \* Power or temperature adjustment with 0 - 10V signal
  - \* Blocking alarm signal for safety and to restart operation
  - \* **Opentherm (OT) and Modbus** communication protocols with settable parameters



| MODEL                             |                    |                             | W 60            | W 80            | W 99            | W 120           | W 150           |
|-----------------------------------|--------------------|-----------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| ERP Class                         |                    | (Class G - A <sup>+</sup> ) | <b>A</b>        | -               | -               | -               | -               |
| Heating heat input                | Min / Max          | kW                          | 58.0 / 15.0     | 74.4 / 15.0     | 96.6 / 19.0     | 113.0 / 19.0    | 159.0 / 24.0    |
| Heating heat output 80°C-60°C     | Min / Max          | kW                          | 56.5 / 14.7     | 72.9 / 14.7     | 94.6 / 18.76    | 110.3 / 18.7    | 140.0 / 23.6    |
| Useful heating output 50°C-30°C   | Min / Max          | kW                          | 61.5 / 15.7     | 77.0 / 14.7     | 100.0 / 20.5    | 117.0 / 20.0    | 148.0 / 25.9    |
| Efficiency                        | 80°C-60°C          | Pmax % / Pmin %             | 98.3 / 98.3     | 98.0 / 98.3     | 98.0 / 98.3     | 97.8 / 98.3     | 97.8 / 98.3     |
|                                   | 50°C-30°C          | Pmax % / Pmin %             | 104.8 / 108.5   | 103.5 / 108.5   | 103.5 / 108.5   | 103.5 / 108.0   | 103.5 / 108.0   |
|                                   | 30% partial load   | Pmax %                      | 108.6           | 108.6           | 108.1           | 108.1           | 108.1           |
| NOx emissions class               |                    |                             | 6               | 6               | 6               | 6               | 6               |
| NOx (O <sub>2</sub> =0%) weighted |                    | mg/kWh                      | 50              | 54              | 39              | 38              | 40              |
| CO (O <sub>2</sub> =0%) weighted  |                    | mg/kWh                      | 75              | 85              | 49              | 50              | 50              |
| Heating operating pressure        | Max / Min          | bar                         | 6 / 0.8         | 6 / 0.8         | 6 / 0.8         | 6 / 0.8         | 6 / 0.8         |
| Water volume                      |                    | lt                          | 4.2             | 4.2             | 5.6             | 5.6             | 6.7             |
| Empty weight                      |                    | kg                          | 54              | 54              | 63              | 63              | 73              |
| No. of pieces/pallet              |                    | no.                         | <b>6</b>        | <b>6</b>        | <b>6</b>        | <b>6</b>        | <b>6</b>        |
| <b>CODE</b>                       | <b>NATURAL GAS</b> |                             | <b>OMDLAAWA</b> | <b>OMDLCAWA</b> | <b>OMDLDAWA</b> | <b>OMDLEAWA</b> | <b>OMDLFAWA</b> |

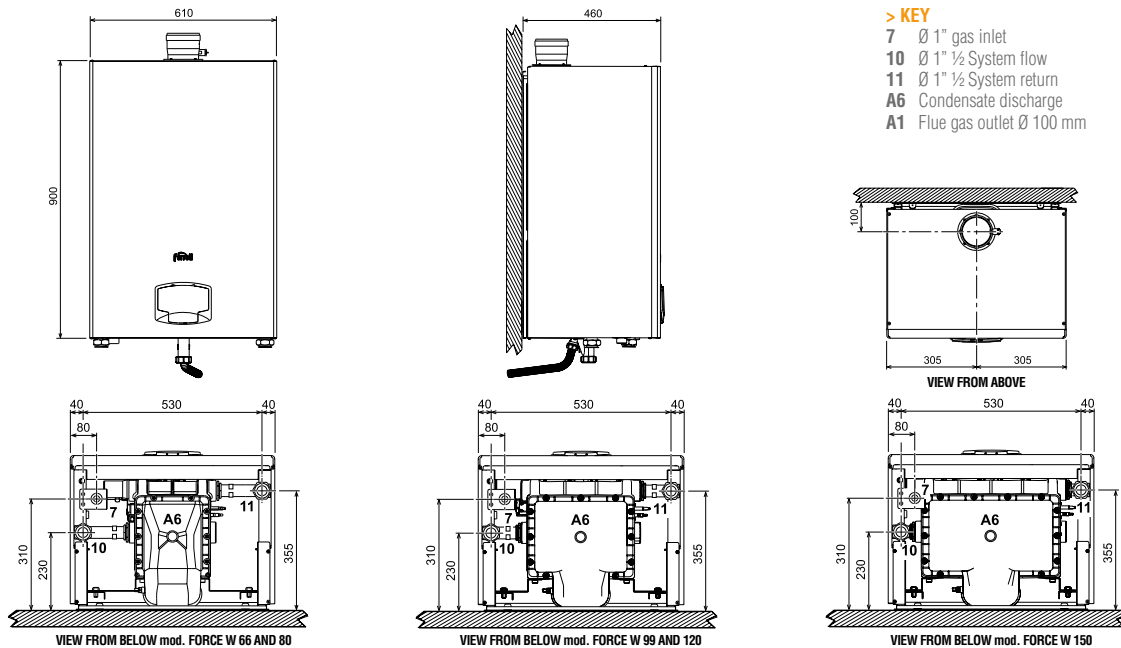



## > HYDRAULIC AND CONTROL ACCESSORIES - STARTING FLUE ACCESSORIES

|  | DESCRIPTION  | CODE     |
|--|--|----------|
|  | low-consumption modulating circulator Head 7 m   | 042070X0 |
|  | low-consumption modulating circulator Head 10 m  | 042071X0 |
|  | <b>system hydraulic kit:</b><br>1 x MF 1" 1/2 cock, 1 x 3-way T 1" 1/2 cock, 1 x 1" 1/2 check valve, 1 x MM 1" 1/2 nipple, 2 gaskets           | 042072X0 |
|  | safety manifold  | 042075X0 |
|  | hydraulic (DN65 delivery and return), gas (DN40) manifolds kit for cascade installation  | 042074X0 |
|  | cascade hydraulic manifolds flanges kit DN65   | 042073X0 |
|  | self-standing frame starter kit* for single or cascade installations<br>* (self-standing only with installation with hydraulic manifolds kits) | 042076X0 |
|  | self-standing frame extension kit for cascade installation   | 042077X0 |
|  | hydraulic separator DN 65<br>For installation until 300 kW   | 042078X0 |
|  | installation kit for hydraulic separator DN 65   | 042079X0 |
|  | Hydraulic separator DN 100<br>For installation until 600 kW  | 042080X0 |
|  | Installation kit for hydraulic separator DN 100  | 042081X0 |
|  | gasketed plates heat exchanger   |          |




|  | DESCRIPTION   | CODE      |          |
|--|---|-----------|----------|
|  | kit for management with thermostat (not supplied) of a dhw storage tank (for heating only boilers)                    | 013017X0  |          |
|  | additional sensor for storage tank and/or system flow for cascade configurations with and without hydraulic separator | 2 m cable | 1KWMA11W |
|  |   | 5 m cable | 043005X0 |
|  | outdoor probe   | 013018X0  |          |
|  | Ø 100 flue gas terminal   | 1KWMA29K  |          |
|  | M/F flue gas outlet reduction Ø 100/80 mm   | 041090X0  |          |
|  | flue gas manifold starter kit cascade   | 041091X0  |          |
|  | flue gas manifold extension kit cascade   | 041092X0  |          |
|  | 90° bend kit in pps Ø 80 mm   | 1KWMA01W  |          |
|  | 90° bend kit in pps Ø 100 mm  | 041077X0  |          |
|  | 90° bend kit in pps Ø 200 mm  | 041060X0  |          |
|  | 0.5 m pps Ø 100 mm MF flue gas duct kit   | 041072X0  |          |
|  | 1 m pps Ø 80 mm MF flue gas duct kit  | 1KWMA83W  |          |
|  | 1 m pps Ø 100 mm MF flue gas duct kit   | 041073X0  |          |
|  | 1 m pps Ø 200 mm MF flue gas duct kit   | 041062X0  |          |
|  | neutralisers (see chapter on condensation neutralisers for condensing boilers)  |           |          |

# FORCE W CONDENSATION THERMAL MODULES FOR CASCADE SYSTEMS FROM POWER PLANT

## CIRCULATOR KIT 7 m

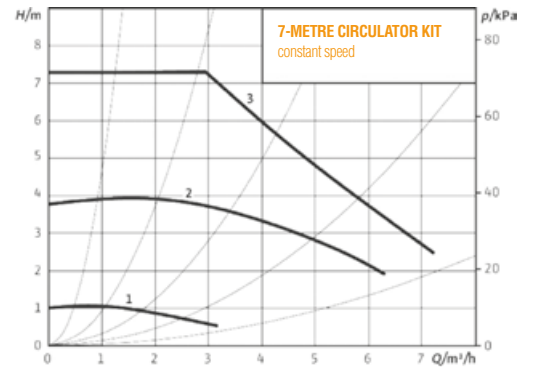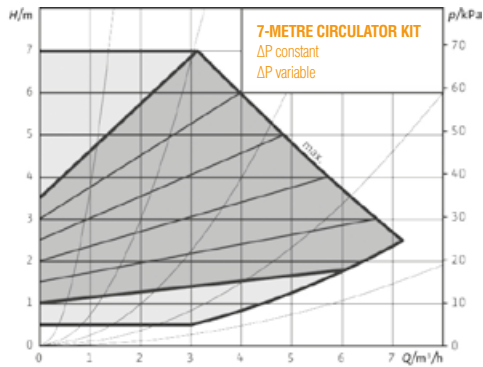


## CIRCULATOR KIT 10 m

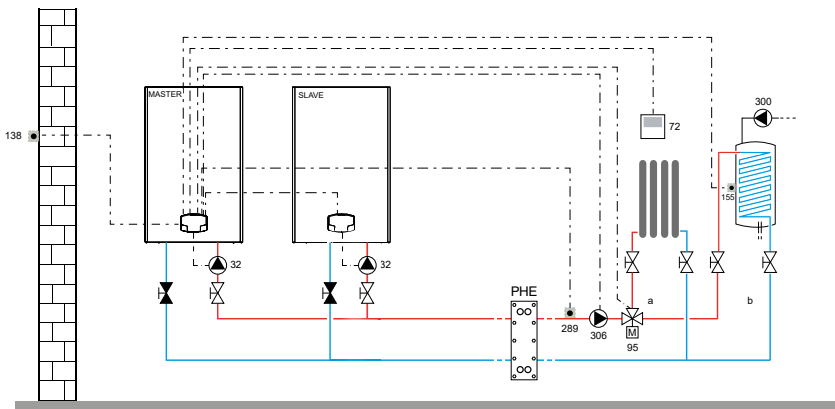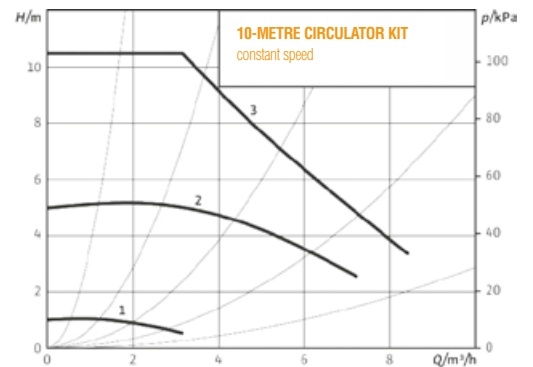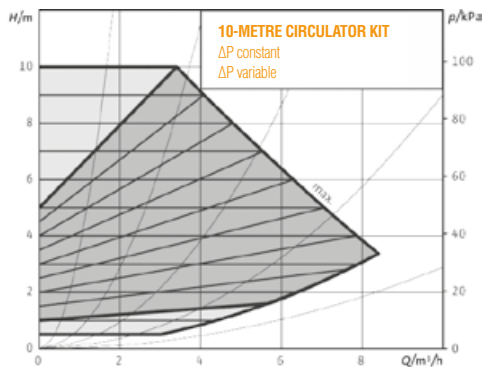

### CASE A: REPLACEMENT OF THE EXISTING GENERATOR ON A HIGH TEMPERATURE SYSTEM

Thermal system with two loops separated by a plate heat exchanger (PHE) The primary circuit is fed by two FORCE W modules connected as a cascade operating in AUTO-CASCADE mode managed directly by the boiler electronics. A "direct" high temperature circuit and a DHW storage with recirculation pump are connected on the secondary circuit (system side). In addition to SLAVE thermal unit management, without any additional equipment, the MASTER generator can control the system's main components.


**KEY 32** Boiler circulator **72a** Room thermostat 1st zone (mixed) **72b** Room thermostat 2nd zone (mixed) **72c** Room thermostat 3rd zone (direct) **138** Outdoor probe **139a** Remote timer control 1st zone (mixed) **139b** Remote timer control 2nd zone (mixed) **139c** Remote timer control 3rd zone (direct) **155** Storage tank probe **300** Antilegionella circulator **315a** Mixing valve 1st zone (mixed) [A = OPENING PHASE B = NEUTRAL C = CLOSING PHASE] **315b** Mixing valve 2nd zone (mixed) [A = OPENING PHASE B = NEUTRAL C = CLOSING PHASE] **317a** Safety thermostat 1st zone (mixed) **317b** Safety thermostat 2nd zone (mixed) **318a** Circulator 1st zone (mixed) **318b** Circulator 2nd zone (mixed) **318c** Circulator 3rd zone (direct) **319a** Delivery sensor 1st zone (mixed) **319b** Delivery sensor 2nd zone (mixed) **a** 1st zone (mixed) **b** 2nd zone (mixed) **c** 3rd zone (direct) **d** Storage tank circuit **FZ4 B** Zone control card **PHE** Steel plate heat exchanger

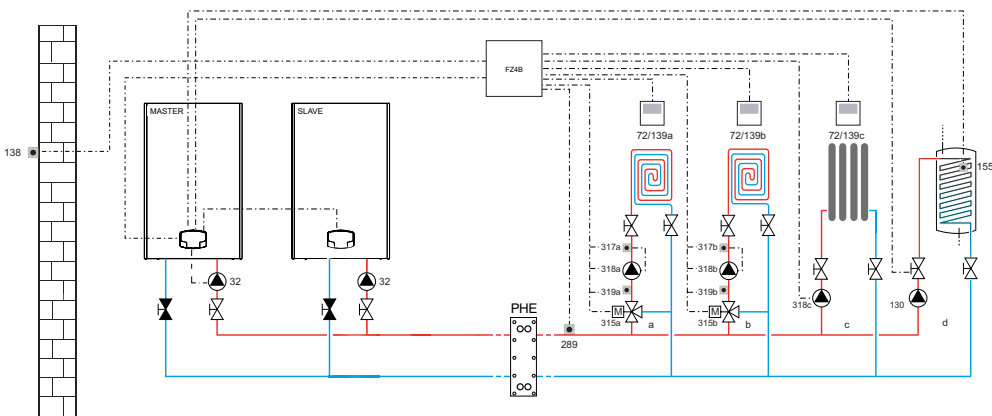

### CASE B: NEWLY DESIGNED SYSTEM

Thermal system with two loops separated by a plate heat exchanger (PHE). The primary circuit is fed by two FORCE W modules connected as a cascade operating in AUTO-CASCADE mode managed directly by the boiler electronics. The secondary circuit is composed of two mixed low temperature "zones", a high temperature direct one and a DHW storage. The MASTER generator controls DHW production directly, in addition to managing the SLAVE thermal unit. The heating zones are controlled by card FZ4 B, connected to the generators through Open Therm.

# FORCE W CASCADE EXAMPLES

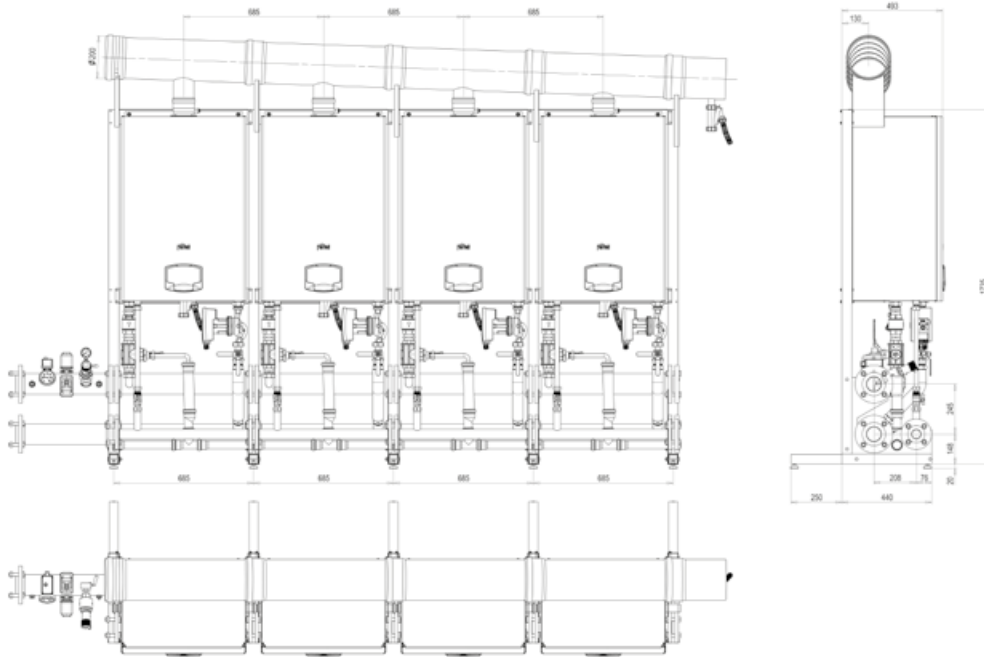

## CASCADE KIT FITTINGS

- Delivery/return manifolds DN65 PN16
- Gas manifold DN40 PN16
- Condensation drain manifold Ø 40 mm
- Flue gas manifold Ø 200 mm

| P <sub>out</sub><br>(50,30°C) | MODULES<br>FORCE W |    |    |     |     | Tot. modules | Self-standing frame (start) | Self-standing frame (extension) | 7-m modulating circulator | 10-m modulating circulator | FORCE W hydraulic kit (3-way 1"1/2 cock - 2-way 1"1/2 cock, 1"1/2 check valve) | hydraulic DN65 delivery and return), gas (DN40) manifolds kit for cascade installation | Safety manifold | Blind flange kit DN65 | 5 m storage tank probe and/or system flow | Flue gas manifold starter kit | Flue gas manifold extension kit | Hydraulic separator DN65 (up to 300 kW) | Installation kit for hydraulic separator DN 65 | Hydraulic separator DN 100 (up to 600 kW) | Installation kit for hydraulic separator DN 100 | Plate heat exchanger |
|-------------------------------|--------------------|----|----|-----|-----|--------------|-----------------------------|---------------------------------|---------------------------|----------------------------|--|--|-----------------|-----------------------|---|-------------------------------|---------------------------------|---|--|---|---|----------------------|
|                               | 60                 | 80 | 99 | 120 | 150 |              |                             |                                 |                           |                            |  |  |                 |                       |   |                               |                                 |   |  |   |   |                      |
| 62                            | 1                  |    |    |     |     | 1            | 1                           | -                               | 1                         | 1                          | 1  | 1  | 1               | 1                     | 1   | -                             | -                               | 1                                       | 1  | -   | -   | 1                    |
| 77                            |                    | 1  |    |     |     | 1            | 1                           | -                               | 1                         | 1                          | 1  | 1  | 1               | 1                     | 1   | -                             | -                               | 1                                       | 1  | -   | -   | 1                    |
| 98                            |                    |    | 1  |     |     | 1            | 1                           | -                               | 1                         | 1                          | 1  | 1  | 1               | 1                     | 1   | -                             | -                               | 1                                       | 1  | -   | -   | 1                    |
| 117                           |                    |    |    | 1   |     | 1            | 1                           | -                               | 1                         | 1                          | 1  | 1  | 1               | 1                     | 1   | -                             | -                               | 1                                       | 1  | -   | -   | 1                    |
| 148                           |                    |    |    |     | 1   | 1            | 1                           | -                               | 1                         | 1                          | 1  | 1  | 1               | 1                     | 1   | -                             | -                               | 1                                       | 1  | -   | -   | 1                    |
| 124                           | 2                  |    |    |     |     | 2            | 1                           | 1                               | 2                         | 2                          | 2  | 2  | 1               | 1                     | 1   | 1                             | 2                               | 1                                       | 1  | -   | -   | 1                    |
| 139                           | 1                  | 1  |    |     |     | 2            | 1                           | 1                               | 2                         | 2                          | 2  | 2  | 1               | 1                     | 1   | 1                             | 2                               | 1                                       | 1  | -   | -   | 1                    |
| 154                           |                    | 2  |    |     |     | 2            | 1                           | 1                               | 2                         | 2                          | 2  | 2  | 1               | 1                     | 1   | 1                             | 2                               | 1                                       | 1  | -   | -   | 1                    |
| 179                           | 1                  |    |    | 1   |     | 2            | 1                           | 1                               | 2                         | 2                          | 2  | 2  | 1               | 1                     | 1   | 1                             | 2                               | 1                                       | 1  | -   | -   | 1                    |
| 194                           |                    | 1  |    | 1   |     | 2            | 1                           | 1                               | 2                         | 2                          | 2  | 2  | 1               | 1                     | 1   | 1                             | 2                               | 1                                       | 1  | -   | -   | 1                    |
| 215                           |                    |    | 1  | 1   |     | 2            | 1                           | 1                               | 2                         | 2                          | 2  | 2  | 1               | 1                     | 1   | 1                             | 2                               | 1                                       | 1  | -   | -   | 1                    |
| 234                           |                    |    |    | 2   |     | 2            | 1                           | 1                               | 2                         | 2                          | 2  | 2  | 1               | 1                     | 1   | 1                             | 2                               | 1                                       | 1  | -   | -   | 1                    |
| 265                           |                    |    |    | 1   | 1   | 2            | 1                           | 1                               | 2                         | 2                          | 2  | 2  | 1               | 1                     | 1   | 1                             | 2                               | 1                                       | 1  | -   | -   | 1                    |
| 296                           |                    |    |    |     | 2   | 2            | 1                           | 1                               | 2                         | 2                          | 2  | 2  | 1               | 1                     | 1   | 1                             | 2                               | -                                       | -  | 1   | 1   | 1                    |
| 332                           |                    |    | 1  | 2   |     | 3            | 1                           | 2                               | 3                         | 3                          | 3  | 3  | 1               | 1                     | 1   | 1                             | 3                               | -                                       | -  | 1   | 1   | 1                    |
| 351                           |                    |    |    | 3   |     | 3            | 1                           | 2                               | 3                         | 3                          | 3  | 3  | 1               | 1                     | 1   | 1                             | 3                               | -                                       | -  | 1   | 1   | 1                    |
| 373                           |                    | 1  |    |     | 2   | 3            | 1                           | 2                               | 3                         | 3                          | 3  | 3  | 1               | 1                     | 1   | 1                             | 3                               | -                                       | -  | 1   | 1   | 1                    |
| 394                           |                    |    | 1  |     | 2   | 3            | 1                           | 2                               | 3                         | 3                          | 3  | 3  | 1               | 1                     | 1   | 1                             | 3                               | -                                       | -  | 1   | 1   | 1                    |
| 413                           |                    |    |    | 1   | 2   | 3            | 1                           | 2                               | 3                         | 3                          | 3  | 3  | 1               | 1                     | 1   | 1                             | 3                               | -                                       | -  | 1   | 1   | 1                    |
| 444                           |                    |    |    |     | 3   | 3            | 1                           | 2                               | 3                         | 3                          | 3  | 3  | 1               | 1                     | 1   | 1                             | 3                               | -                                       | -  | 1   | 1   | 1                    |
| 468                           |                    |    |    |     | 4   | 4            | 1                           | 3                               | 4                         | 4                          | 4  | 4  | 1               | 1                     | 1   | 1                             | 4                               | -                                       | -  | 1   | 1   | 1                    |
| 506                           | 1                  |    |    |     | 3   | 4            | 1                           | 3                               | 4                         | 4                          | 4  | 4  | 1               | 1                     | 1   | 1                             | 4                               | -                                       | -  | 1   | 1   | 1                    |
| 530                           |                    |    |    | 2   | 2   | 4            | 1                           | 3                               | 4                         | 4                          | 4  | 4  | 1               | 1                     | 1   | 1                             | 4                               | -                                       | -  | 1   | 1   | 1                    |
| 561                           |                    |    |    | 1   | 3   | 4            | 1                           | 3                               | 4                         | 4                          | 4  | 4  | 1               | 1                     | 1   | 1                             | 4                               | -                                       | -  | 1   | 1   | 1                    |
| 592                           |                    |    |    |     | 4   | 4            | 1                           | 3                               | 4                         | 4                          | 4  | 4  | 1               | 1                     | 1   | 1                             | 4                               | -                                       | -  | 1   | 1   | 1                    |

# FORCE W SIZING AND CHOICE PLATE EXCHANGER

Below are some examples of sizing of plate heat exchangers to be combined with FORCE W generators. The choice and testing of the heat exchanger to be used, in relation to the system, is always the responsibility of the customer. The installation technician is in charge of installation. Characteristics and technical data of the PHE plate heat exchangers are in the "System components" section.

## > HIGH TEMPERATURE SYSTEMS

| System power | Models FORCE W |    |    |     |     | INSPECTABLE PLATE EXCHANGERS PHE |          |                  |                |                    |                |
|--------------|----------------|----|----|-----|-----|----------------------------------|----------|------------------|----------------|--------------------|----------------|
|              |                |    |    |     |     | MODEL                            | CODE     | Primary: 80/60°C |                | Secondary: 50/70°C |                |
|              |                |    |    |     |     |                                  |          | Flow rates       | Pressure drops | Flow rates         | Pressure drops |
| kW           | 60             | 80 | 99 | 120 | 150 | m³/h                             | m²H₂O    | m³/h             | m²H₂O          |                    |                |
| 62           | 1              |    |    |     |     | PHE 32380 29P                    | 052682X0 | 2.72             | 0.6745         | 2.71               | 0.5968         |
| 77           |                | 1  |    |     |     | PHE 32380 41P                    | 052683X0 | 3.38             | 0.6205         | 3.37               | 0.6136         |
| 98           |                |    | 1  |     |     | PHE 32380 41P                    | 052683X0 | 4.31             | 1.0001         | 4.29               | 0.9891         |
| 117          |                |    |    | 1   |     | PHE 32380 47P                    | 052684X0 | 5.14             | 1.1973         | 5.12               | 1.1852         |
| 148          |                |    |    |     | 1   | PHE 50420 35P                    | 052686X0 | 6.50             | 0.6655         | 6.47               | 0.6655         |
| 124          | 2              |    |    |     |     | PHE 32380 47P                    | 052684X0 | 5.45             | 1.3435         | 5.42               | 1.3299         |
| 139          | 1              | 1  |    |     |     | PHE 32380 53P                    | 052685X0 | 6.11             | 1.1245         | 6.08               | 1.4589         |
| 154          |                | 2  |    |     |     | PHE 50420 35P                    | 052686X0 | 6.77             | 0.7169         | 6.74               | 0.7169         |
| 179          | 1              |    |    | 1   |     | PHE 50420 35P                    | 052686X0 | 7.86             | 0.9512         | 7.83               | 0.9510         |
| 194          |                | 1  |    | 1   |     | PHE 50420 35P                    | 052686X0 | 8.52             | 1.1068         | 8.49               | 1.1065         |
| 215          |                |    | 1  | 1   |     | PHE 50420 35P                    | 052686X0 | 9.45             | 1.3430         | 9.41               | 1.3430         |
| 234          |                |    |    | 2   |     | PHE 50420 43P                    | 052687X0 | 10.28            | 1.1238         | 10.24              | 1.1233         |
| 265          |                |    |    | 1   | 1   | PHE 50420 43P                    | 052687X0 | 11.64            | 1.4220         | 11.59              | 1.4213         |
| 296          |                |    |    |     | 2   | PHE 50420 53P                    | 052688X0 | 14.59            | 1.2763         | 14.52              | 1.2754         |
| 332          |                |    | 1  | 2   |     | PHE 50420 53P                    | 052688X0 | 15.42            | 1.5776         | 15.36              | 1.5863         |
| 351          |                |    |    | 3   |     | PHE 50420 59P                    | 052689X0 | 15.42            | 1.5179         | 15.36              | 1.5166         |
| 373          |                | 1  |    |     | 2   | PHE 50420 59P                    | 052689X0 | 16.39            | 1.7046         | 16.32              | 1.703          |
| 394          |                |    | 1  |     | 2   | PHE 50420 67P                    | 052690X0 | 17.31            | 1.6019         | 17.24              | 1.6019         |
| 413          |                |    |    | 1   | 2   | PHE 50420 67P                    | 052690X0 | 18.15            | 1.7531         | 18.07              | 1.7512         |
| 444          |                |    |    |     | 3   | PHE 50420 67P                    | 052690X0 | 19.60            | 2.0138         | 19.42              | 2.0116         |
| 468          |                |    |    | 4   |     | PHE 50420 67P                    | 052690X0 | 20.56            | 2.0745         | 20.47              | 2.0722         |
| 506          | 1              |    |    |     | 3   | PHE 50420 81P                    | 052692X0 | 22.23            | 2.0738         | 22.14              | 4.0838         |
| 530          |                |    |    | 2   | 2   | PHE 50420 81P                    | 052692X0 | 23.29            | 2.2676         | 23.19              | 2.2645         |
| 561          |                |    |    | 1   | 3   | PHE 50420 85P                    | 052693X0 | 24.65            | 2.4048         | 24.54              | 2.4014         |
| 592          |                |    |    |     | 4   | PHE 50420 97P                    | 052694X0 | 26.01            | 2.3475         | 25.90              | 2.3437         |



## > LOW TEMPERATURE SYSTEMS

| System power | Models FORCE W |    |    |     |     | INSPECTABLE PLATE EXCHANGERS PHE |          |                  |                |                    |                |
|--------------|----------------|----|----|-----|-----|----------------------------------|----------|------------------|----------------|--------------------|----------------|
|              |                |    |    |     |     | MODEL                            | CODE     | Primary: 60/40°C |                | Secondary: 30/40°C |                |
|              |                |    |    |     |     |                                  |          | Flow rates       | Pressure drops | Flow rates         | Pressure drops |
| kW           | 60             | 80 | 99 | 120 | 150 | m³/h                             | m²H₂O    | m³/h             | m²H₂O          |                    |                |
| 62           |                |    |    |     |     | PHE 32380 29P                    | 052682X0 | 2.70             | 0.680          | 5.37               | 3.615          |
| 77           |                | 1  |    |     |     | PHE 32380 29P                    | 052682X0 | 3.36             | 1.042          | 6.67               | 4.014          |
| 98           |                |    | 1  |     |     | PHE 32380 29P                    | 052682X0 | 4.27             | 1.677          | 8.49               | 6.468          |
| 117          |                |    |    | 1   |     | PHE 32380 41P                    | 052683X0 | 5.10             | 1.427          | 10.14              | 5.530          |
| 148          |                |    |    |     | 1   | PHE 32380 53P                    | 052685X0 | 6.45             | 3.104          | 12.83              | 6.513          |
| 124          | 2              |    |    |     |     | PHE 32380 47P                    | 052684X0 | 5.40             | 1.348          | 10.75              | 5.238          |
| 139          | 1              | 1  |    |     |     | PHE 32380 47P                    | 052684X0 | 6.06             | 1.690          | 12.05              | 6.570          |
| 154          |                | 2  |    |     |     | PHE 32380 53P                    | 052685X0 | 6.71             | 1.809          | 13.35              | 7.048          |
| 179          | 1              |    |    | 1   |     | PHE 50420 35P                    | 052686X0 | 7.80             | 0.937          | 15.51              | 3.646          |
| 194          |                | 1  |    | 1   |     | PHE 50420 35P                    | 052686X0 | 8.45             | 1.148          | 16.81              | 4.244          |
| 215          |                |    | 1  | 1   |     | PHE 50420 35P                    | 052686X0 | 9.37             | 1.392          | 18.63              | 5.155          |
| 234          |                |    |    | 2   |     | PHE 50420 35P                    | 052686X0 | 10.20            | 1.632          | 20.28              | 6.052          |
| 265          |                |    |    | 1   | 1   | PHE 50420 43P                    | 052687X0 | 11.55            | 1.470          | 22.97              | 5.467          |
| 296          |                |    |    |     | 2   | PHE 50420 53P                    | 052688X0 | 12.90            | 1.316          | 25.85              | 4.915          |
| 332          |                |    | 1  | 2   |     | PHE 50420 53P                    | 052688X0 | 14.47            | 1.635          | 28.77              | 1.635          |
| 351          |                |    |    | 3   |     | PHE 50420 59P                    | 052689X0 | 15.29            | 1.561          | 30.42              | 6.804          |
| 373          |                | 1  |    |     | 2   | PHE 50420 59P                    | 052689X0 | 16.25            | 1.752          | 32.33              | 6.579          |
| 394          |                |    | 1  |     | 2   | PHE 50420 67P                    | 052690X0 | 17.17            | 1.643          | 34.15              | 6.192          |
| 413          |                |    |    | 1   | 2   | PHE 50420 67P                    | 052690X0 | 18.00            | 1.798          | 35.79              | 6.778          |
| 444          |                |    |    |     | 3   | PHE 50420 71P                    | 052691X0 | 19.35            | 1.920          | 38.48              | 7.258          |
| 468          |                |    |    | 4   |     | PHE 50420 81P                    | 052692X0 | 20.39            | 1.823          | 40.56              | 6.918          |
| 506          | 1              |    |    |     | 3   | PHE 50420 97P                    | 052694X0 | 22.05            | 1.763          | 43.85              | 6.735          |
| 530          |                |    |    | 2   | 2   | PHE 50420 97P                    | 052694X0 | 23.09            | 1.928          | 45.93              | 7.368          |
| 561          |                |    |    | 1   | 3   | PHE50750 71P                     | 052695X0 | 24.44            | 1.711          | 48.62              | 6.568          |
| 592          |                |    |    |     | 4   | PHE50750 71P                     | 052695X0 | 25.79            | 1.899          | 51.31              | 7.292          |





# FORCE W CHOICE HYDRAULIC SEPARATOR

The hydraulic separator guarantees the independence between the primary circuit (generator) and the secondary circuit (system) without any disturbance or interference between them. The separator is proposed complete with deaerator, sludge separator and is fully insulated.

## CHARACTERISTICS:

Max operating pressure: 6 bar - Temperature range: 0 - 100°C - Fittings: DN 65 / DN 100



### HYDRAULIC SEPARATOR FOR INSTALLATION UP TO 300 KW

| DESCRIPTION  | CODE     |
|--|----------|
|  Hydraulic separator DN 65                | 042078X0 |
|  Kit for hydraulic separator installation | 042079X0 |

### HYDRAULIC SEPARATOR FOR INSTALLATION UP TO 600 KW


| DESCRIPTION   | CODE     |
|---|----------|
|  Hydraulic separator DN 100               | 042080X0 |
|  Kit for hydraulic separator installation | 042081X0 |

## DIMENSION AND TECHNICAL DATA

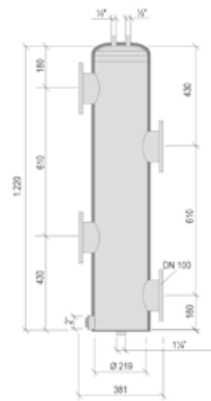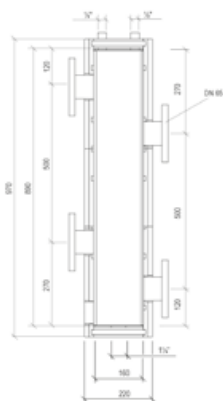

| MODEL           |                   | DN 65              | DN 100             |
|-----------------|-------------------|--------------------|--------------------|
| Flow rate       | m <sup>3</sup> /h | 18                 | 30                 |
| Water content   | lt                | 21                 | 46                 |
| Max temperature | °C                | 100                | 100                |
| Max pressure    | bar               | 6                  | 6                  |
| Material        | -                 | ST37.1 stainless   | ST37.1 stainless   |
| Insulation      | -                 | Black EPP - 40 g/l | Black EPP - 40 g/l |

## PRESSURE DROP

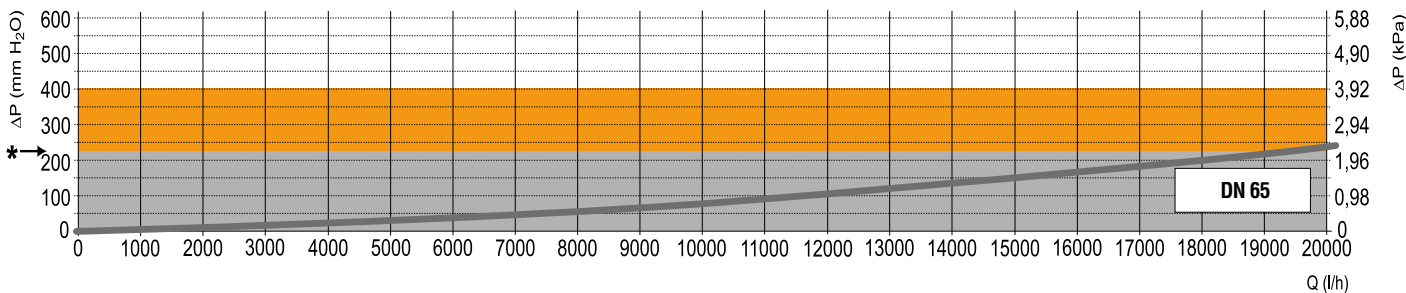

\* Nominal reference: internal speed - 0.2 m/s - inlet side speed 1.2 m/s

limited working range  
 Recommended working range

# DIVATECH D LN

INSTANT COMBI DOUBLE EXCHANGER WALL-HUNG BOILERS OPEN FLUE  
NATURAL DRAUGHT - LOW NO<sub>x</sub>

ERP



## > STRENGTHS:

- **Primary heat exchanger with compact geometry made** entirely of copper
- **Instantaneous production** of domestic hot water with a **dedicated DHW plate exchanger**
- **By-pass** with standard supply
- Boiler with a open chamber and natural draught, with **low NO<sub>x</sub> emissions atmospheric burner**, AISI 304 stainless steel
- **High efficiency and low consumption circulator** (ErP - Class A) with block protection system by being activated for a few seconds every 24 hours of inactivity
- **Can be combined** with the modulating remote control
- **Outer casing** coated with white anaphoresis epoxy powders
- Simple and complete control panel, user interface with **display** and setting **keys**
- **Compact size and reduced weight**

## > ADVANTAGES OF DIVATECH D LN:

- **Modulating heat input** during both heating and production of DHW, managed by a microprocessor electronic card
- **ECO/COMFORT system** for fast production of DHW
- **Adjustable post-circulation** after the heating phase
- **Solar system set up:** set up for the production of domestic hot water combined with solar panel systems




## REPLACEMENT OF BOILERS INSTALLED IN COLLECTIVE CHIMNEYS

In the EU the **new** (redesigned) **DIVATECH D C 24/30 LN "ErP Compliant"** can **ONLY** be installed as replacement for open flues boilers evacuating through collective chimneys, **provided that such installation is also permitted by local laws.** In that sense the **new** DIVATECH D C 24/30 LN are deemed to be compliant with ErP, which explicitly allows only for that exception.




| MODEL  |           |                              | C 24            | C 30            |
|--|-----------|------------------------------|-----------------|-----------------|
| ERP Class  |           | (Class G - A <sup>++</sup> ) | <b>C</b>        | <b>C</b>        |
|  |           | (Class G - A)                | <b>A</b>        | <b>A</b>        |
| Nominal heat output in heating (P <sub>n</sub> ) | Min / Max | kW                           | 7.0 / 23.5      | 9.7 / 30.0      |
| Heat input                                       | Min / Max | kW                           | 8.3 / 25.8      | 11.5 / 33.3     |
| Useful DHW heat output                           |           | kW                           | 23.5            | 30.0            |
| Efficiency (P <sub>n</sub> )                     |           | %                            | 91.0            | 91.0            |
| Maximum DHW production                           | Δt 30°C   | l/min                        | 11.2            | 14.3            |
|  | Δt 25°C   | l/min                        | 13.4            | 17.2            |
| Empty weight                                     |           | kg                           | 27              | 30              |
| <b>No. of pieces/pallet</b>                      |           | <b>no.</b>                   | <b>10</b>       | <b>10</b>       |
| <b>CODE</b>                                      |           | <b>NAT. GAS</b>              | <b>ODCC4YWA</b> | <b>ODCC6YWA</b> |


## DIVATECH D LN

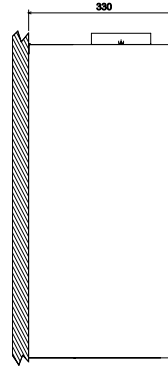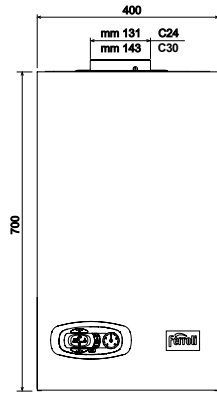

C 24 - VIEW FROM ABOVE



C24 / C 30 - VIEW FROM BELOW



C 30 - VIEW FROM ABOVE

### > KEY

7  $\varnothing$  3/4" gas inlet



8  $\varnothing$  1/2" DHW water outlet



9  $\varnothing$  1/2" DHW water inlet

10 heating system flow  $\varnothing$  3/4"

11  $\varnothing$  3/4" heating system return

### > HYDRAULIC AND CONTROL ACCESSORIES

|   | DESCRIPTION  | CODE     |
|---|--|----------|
|  | kit for connection of fittings complete with gas tap with cone, DHW tap, 2 system taps, pipes, nipple, gaskets | 012040W0 |
|  | kit for connection of 5 pipe fittings<br>NB: the kit does not include taps and connection nipples              | 012047W0 |

|  | DESCRIPTION                                | CODE     |
|--|--|----------|
|  | outdoor probe                              | 013018X0 |
|  | thermostatic mixer kit<br>1/2" connections | 013002X0 |

# DIVATECH D

## INSTANT COMBI WALL HUNG GAS BOILER




- Traditional compact wall hung boiler for central heating and domestic hot water
- **Monothermic CH exchanger** plus **DHW stainless steel plates exchanger** fed by diverting valve
- Complete and intuitive control board, with autodiagnostic function, featuring backlit display and setting buttons
- Can be connected to **outdoor probe** and **remote control**, as optionals
- Modulating operation both in heating and domestic hot water mode, with adjustable temperature increase slope
- Hydraulic bypass as a standard
- Antifrost function, if gas and power supplied
- Ready for connection to **solar systems**: integrated management of combined DHW production through boiler and solar system
- Compact dimensions thus enabling installation, also in place where limited space is available
- Available in the LPG version

MOD C: OPEN FLUE  
MOD F: ROOM SEALED



WATER SCHEME

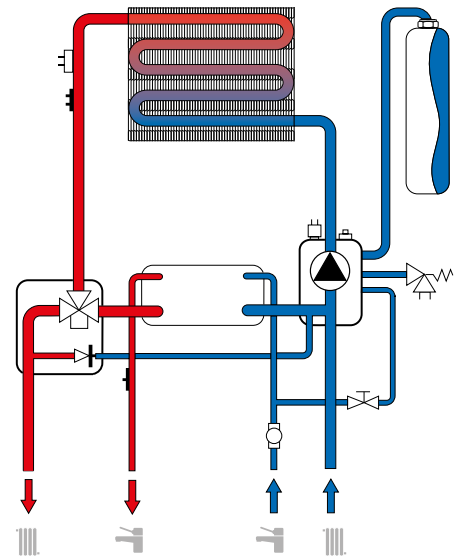


| MODEL                      |             |        | C 24            | C 32            | F 24            | F 32            | F 37            |
|----------------------------|-------------|--------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Heat input                 | Max         | kW     | 25,8            | 34,4            | 25,8            | 34,4            | 39,7            |
|                            | Min         | kW     | 8,3             | 11,5            | 8,3             | 11,5            | 14,0            |
| Heat output                | Max         | kW     | 23,5            | 31,3            | 24,0            | 32,0            | 37,0            |
|                            | Min         | kW     | 7,0             | 9,7             | 7,2             | 9,9             | 12,9            |
| Efficiency                 | 80°C - 60°C | Pmax % | 91,0            | 91,0            | 93,0            | 93,1            | 93,2            |
|                            | 30% load    | %      | 89,6            | 89,8            | 90,5            | 91              | 91              |
| DHW production             | Δt 25°C     | l/min  | 13,4            | 17,9            | 13,7            | 18,3            | 21,1            |
|                            | Δt 30°C     | l/min  | 11,2            | 14,9            | 11,4            | 15,2            | 17,6            |
| Heating operating pressure | Max         | bar    | 3               | 3               | 3               | 3               | 3               |
| Empty weight               |             | kg     | 27              | 30              | 32              | 35              | 37              |
| Dimensions                 | WxHxD       | mm     | 400x700x330     | 400x700x330     | 400x700x330     | 400x700x330     | 450x700x330     |
| CODE                       |             |        | <b>ODAC4YYA</b> | <b>ODAC7YYA</b> | <b>ODAF4YYA</b> | <b>ODAF7YYA</b> | <b>ODAF8YYA</b> |

## DIVATECH C D


## DIVATECH F D

DIVATECH C 32 D

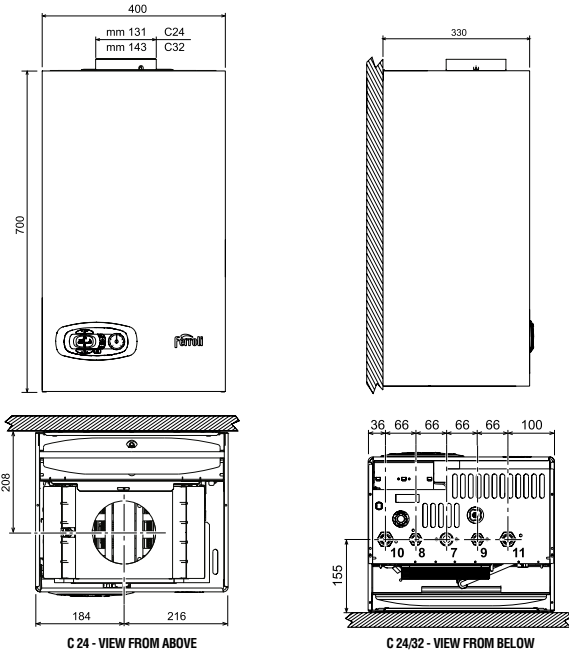


C 24 - VIEW FROM ABOVE

C 24/32 - VIEW FROM BELOW

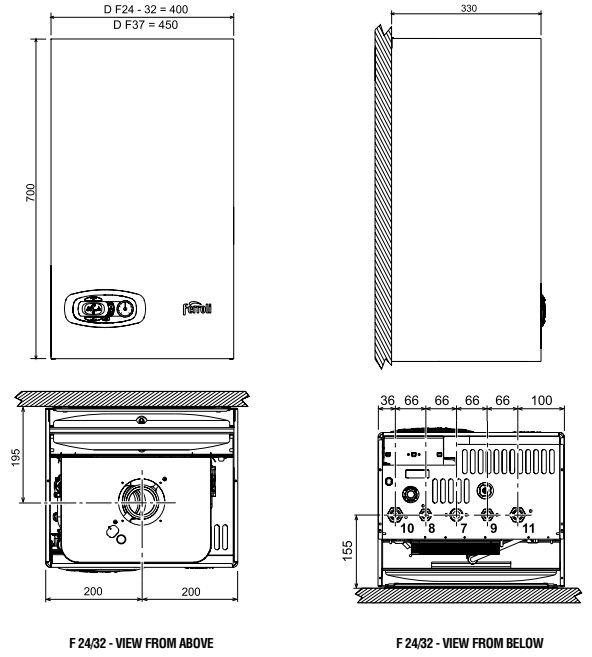


F 24/32 - VIEW FROM ABOVE

F 24/32 - VIEW FROM BELOW



C 32 - VIEW FROM ABOVE

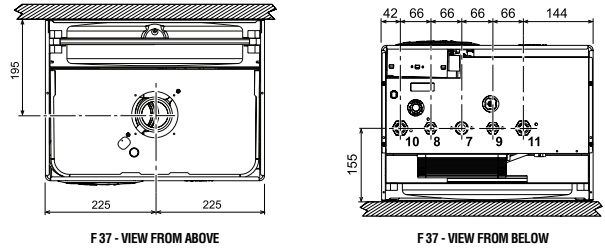

F 37 - VIEW FROM ABOVE






F 37 - VIEW FROM BELOW

### > KEY

- 7  $\varnothing$  3/4" gas inlet
- 8  $\varnothing$  1/2" DHW water outlet

- 9  $\varnothing$  1/2" DHW water inlet
- 10 heating system flow  $\varnothing$  3/4"
- 11  $\varnothing$  3/4" heating system return

### > HYDRAULIC AND CONTROL ACCESSORIES

| DESCRIPTION  | CODE     |
|--|----------|
|  universal kit for replacement of wall-hung boilers   | 012025X0 |
|  electric heating elements kit for auxiliary antifrost down to -15°C  | 013009X0 |
|  Concentric kit 01007X0 + 1KWMA56A (made by: 90° bend, 1mt terminal pipe, $\varnothing$ 60/100 mm)              | 010012X0 |
|  kit for connection of fittings complete with gas tap with cone, DHW tap, 2 system taps, pipes, nipple, gaskets | 012040W0 |
|  kit for connection of 5 pipe fittings<br>NB: the kit does not include taps and connection nipples              | 012047W0 |

| DESCRIPTION  | CODE     |
|--|----------|
|  outdoor probe   | 013018X0 |
|  thermostatic mixer kit 1/2" connections   | 013002X0 |
|  Vertical concentric connection, $\varnothing$ 60/100 mm, external PVC internal aluminium                              | 010006X0 |
|  90° flanged concentric bend - 360° adjustable by 45° steps - $\varnothing$ 60/100 mm, external PVC internal aluminium | 010007X0 |
|  Vertical concentric connection, $\varnothing$ 80/125 mm, with test point, aluminium                                   | 010018X0 |
|  Twin pipes adaptor $\varnothing$ 80/80 mm   | 010031X0 |


# DIVATECH D HF

## ONLY HEATING WALL HUNG BOILER




- Traditional compact wall hung boiler for central heating and vertical external DHW cylinder
- **CH exchanger** plus **DHW stainless steel plates exchanger** fed by diverting valve
- Built-in electronic management of an **eventual external DHW cylinder**, fed by the onboard diverter valve
- Can be connected to **outdoor probe** and **remote control**, as optionals
- Complete and intuitive **backlit graphic display** for easy and correct setting of the parameters
- Antifrost function, if gas and power supplied
- Timed antiseize program for pump and diverter valve
- Automatic bypass as standard
- Protection index **IPX5D**, which means excellent electrical protection of the appliance

WATER SCHEME

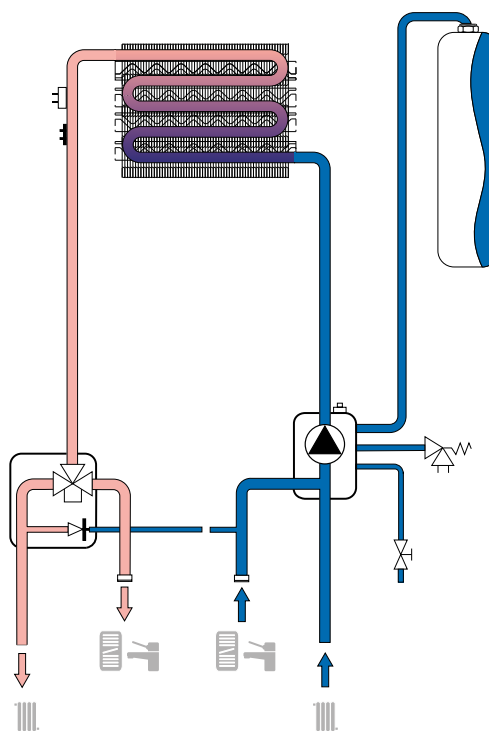




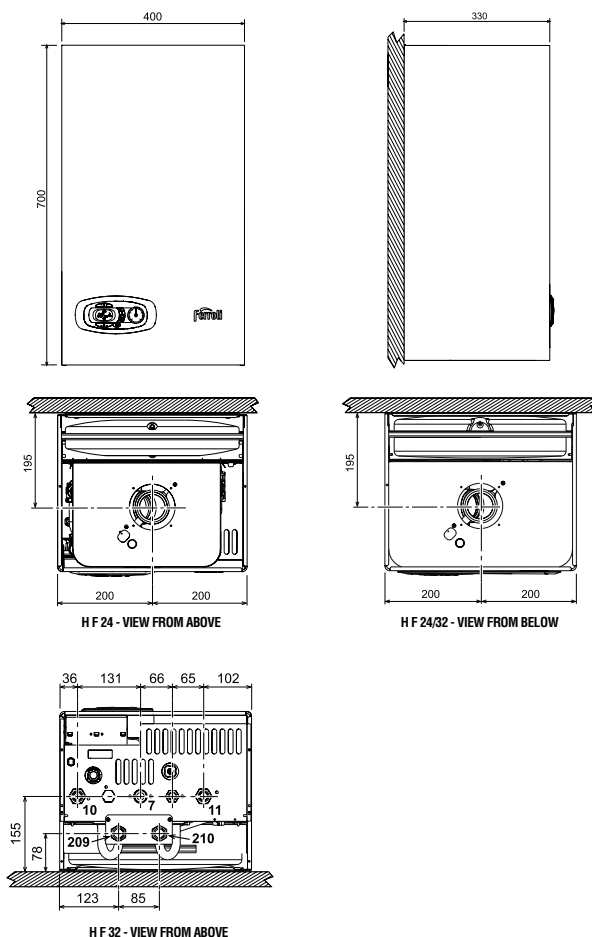


| MODEL                      |             |        | H F 24          | H F 32          |
|----------------------------|-------------|--------|-----------------|-----------------|
| Heat input                 | Max Heating | kW     | 25,8            | 34,4            |
|                            | Min         | kW     | 8,3             | 11,5            |
| Heat output                | Max Heating | kW     | 24,0            | 32,0            |
|                            | Min         | kW     | 7,2             | 9,9             |
| Heating operating pressure | Max         | bar    | 3               | 3               |
| Heating water content      |             | litres | 1               | 1,5             |
| Empty weight               |             | kg     | 31              | 35              |
| Dimensions                 | WxHxD       | mm     | 400x700x330     | 450x700x330     |
| <b>CODE (see page 5)</b>   |             |        | <b>0DA04ZYA</b> | <b>0DA07ZYA</b> |

## DIVATECH H F D



### > HYDRAULIC AND CONTROL ACCESSORIES

| DESCRIPTION  | CODE     |
|--|----------|
|  galvanised template  | 016074X0 |
|  universal kit for replacement of wall-hung boilers   | 012025X0 |
|  electric heating elements kit for auxiliary antifrost down to -15°C  | 013009X0 |
|  Concentric kit 01007X0 + 1KWMA56A (made by: 90° bend, 1mt terminal pipe, Ø 60/100 mm)                          | 010012X0 |
|  kit for connection of fittings complete with gas tap with cone, DHW tap, 2 system taps, pipes, nipple, gaskets | 012040W0 |
|  kit for connection of 5 pipe fittings<br>NB: the kit does not include taps and connection nipples              | 012047W0 |

| DESCRIPTION  | CODE  |           |          |           |          |
|--|---|-----------|----------|-----------|----------|
|  outdoor probe   | 013018X0  |           |          |           |          |
|  thermostatic mixer kit 1/2" connections   | 013002X0  |           |          |           |          |
|  Vertical concentric connection, Ø 60/100 mm, external PVC internal aluminium                              | 010006X0  |           |          |           |          |
|  90° flanged concentric bend - 360° adjustable by 45° steps - Ø 60/100 mm, external PVC internal aluminium | 010007X0  |           |          |           |          |
|  Vertical concentric connection, Ø 80/125 mm, with test point, aluminium                                   | 010018X0  |           |          |           |          |
|  Twin pipes adaptor Ø 80/80 mm   | 010031X0  |           |          |           |          |
|  additional sensor for managing any external storage tank  | <table border="1"> <tr> <td>cable 2 m</td> <td>1KWMA11W</td> </tr> <tr> <td>cable 5 m</td> <td>043005X0</td> </tr> </table> | cable 2 m | 1KWMA11W | cable 5 m | 043005X0 |
|  | cable 2 m   | 1KWMA11W  |          |           |          |
| cable 5 m  | 043005X0  |           |          |           |          |

# DOMINA N


## INSTANT COMBI WALL HUNG GAS BOILER




- **Bithermic** copper exchanger
- Combined control panel: knobs, buttons, LEDs for a quick, easy handling of boiler operation
- **3 speed pump** with antiseize function: it is switched on for few seconds in case of 24 hours inactivity
- Hydraulic bypass as a standard
- Atmospheric burner in stainless steel AISI 304
- Modulating operation both in heating and domestic hot water mode
- Can be combined with **modulating remote control**
- **ECO/COMFORT** mode: choice of Comfort mode maintains exchanger warm, drastically reducing waiting time for domestic hot water supply
- **Ready for connection to solar systems:** integrated management of combined DHW production
- Condensate trap for air pressure switch
- Compact dimensions thus enabling installation, also in place where limited space is available
- Protection index **IPX5D**, which means excellent electrical protection of the appliance

### PHASING OUT

MOD C: OPEN FLUE, NATURAL DRAUGHT  
MOD F: ROOM SEALED, FORCED DRAUGHT



CH



DHW



| MODEL                      |             |        | C 20 N      | C 24 N      | C 28 N      | C 32 N      | F 20 N      | F 24 N      | F 28 N      | F 32 N      |
|----------------------------|-------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Heat input                 | Max Heating | kW     | 22,0        | 25,8        | 30,8        | 34,4        | 21,5        | 25,8        | 30,0        | 34,4        |
|                            | Min         | kW     | 8,3         | 8,3         | 11,5        | 11,5        | 8,3         | 8,3         | 11,5        | 11,5        |
|                            | Max DHW     | kW     | 22,0        | 25,8        | 34,4        | 34,4        | 21,5        | 25,8        | 34,4        | 34,4        |
| Heat output                | Max Heating | kW     | 20,0        | 23,5        | 28,0        | 31,3        | 20,0        | 24,0        | 28,0        | 32,0        |
|                            | Min         | kW     | 7,0         | 7,0         | 9,9         | 9,9         | 7,2         | 7,2         | 9,9         | 9,9         |
|                            | Max DHW     | kW     | 20,0        | 23,5        | 31,3        | 31,3        | 20,0        | 24,0        | 32,0        | 32,0        |
| Efficiency                 | 80°C - 60°C | Pmax % | 91          | 91          | 91          | 91          | 93          | 93          | 93,1        | 93,1        |
|                            | 30% load    | %      | 89,6        | 89,6        | 89,6        | 89,6        | 90,5        | 90,5        | 91          | 91          |
| Heating water content      |             | litres | 1,2         | 1,2         | 1,2         | 1,2         | 1,0         | 1,0         | 1,2         | 1,2         |
| DHW production             | Δt 25°C     | l/min  | 11,5        | 13,4        | 17,9        | 17,9        | 11,5        | 13,7        | 18,3        | 18,3        |
|                            | Δt 30°C     | l/min  | 9,6         | 11,2        | 14,9        | 14,9        | 9,6         | 11,4        | 15,2        | 15,2        |
| Heating operating pressure | Max         | bar    | 3           | 3           | 3           | 3           | 3           | 3           | 3           | 3           |
| Empty weight               |             | kg     | 25          | 25          | 30          | 30          | 30          | 30          | 35          | 35          |
| Dimensions                 | WxHxD       | mm     | 400x700x230 | 400x700x230 | 400x700x330 | 400x700x330 | 400x700x230 | 400x700x230 | 400x700x330 | 400x700x330 |
| CODE                       |             |        | -           | 0ABC4RUA    | 0ABC5RUA    | 0ABC7RUA    | -           | 0ABF4RUA    | 0ABF5RUA    | 0ABF7RUA    |






- 1 ON-OFF
- 2 Winter/Summer mode switch
- 3 Reset switch
- 4 Timing and set switch
- 5 Setting switch
- 6 Floor heating mode
- 7 Setting switch
- 8 Confirm switch
- 9 Heating temperature adjustment
- 10 Hot water temperature adjustment
- 11 Water pressure gauge
- 12 LCD display

- One or three phases operation
- Output modulation on 6 stages for models 6 - 9, on 12 steps for bigger models
- Flow temperature compensation through (optional) outdoor probe
- Heating planning through internal timer or optional programmable thermostat
- 2 levels antifrost function
- Modular operation through optional cascade controller
- Includes high efficiency pump with anti-seize function, expansion vessel, bypass
- Can manage an external DHW tank



MOD. 9.0





| MODEL                       |       |                 | 6.0 TS                          | 7.5 TS      | 9.0 TS      | 12.0 TS          | 18.0 TS     | 24.0 TS     |
|-----------------------------|-------|-----------------|---------------------------------|-------------|-------------|------------------|-------------|-------------|
| Erp Class                   |       | (G - A++ Class) | <b>D</b>                        | <b>D</b>    | <b>D</b>    | <b>D</b>         | <b>D</b>    | <b>D</b>    |
| Input power                 |       | kW              | 6                               | 7,5         | 9           | 12               | 18          | 24          |
| Voltage                     |       |                 | 1x230V/50Hz or 3x230V/400V/50Hz |             |             | 3x230V/400V/50Hz |             |             |
| Current                     | max   | A               | 41                              | 41          | 41          | 3x43             | 3x43        | 3x43        |
| Operating temperature in CH | max   | °C              | 80                              | 80          | 80          | 80               | 80          | 80          |
| Expansion water tank        |       | litres          | 10                              | 10          | 10          | 10               | 10          | 10          |
| Operating pressure          | max   | bar             | 0,8                             | 0,8         | 0,8         | 0,8              | 0,8         | 0,8         |
|                             | min   | bar             | 3                               | 3           | 3           | 3                | 3           | 3           |
| Flow / return connection    |       | G               | 3/4"                            | 3/4"        | 3/4"        | 3/4"             | 3/4"        | 3/4"        |
| Water filling / drain hole  |       | G               | 1/2"                            | 1/2"        | 1/2"        | 1/2"             | 1/2"        | 1/2"        |
| Protection class            |       | IP              | 40                              | 40          | 40          | 40               | 40          | 40          |
| Empty weight                |       | kg              | 29,5                            | 29,5        | 29,5        | 40               | 40          | 40          |
| Dimensions                  | WxHxD | mm              | 440x740x265                     | 440x740x265 | 440x740x265 | 740x440x340      | 740x440x340 | 740x440x340 |

# DOMINA F

## INSTANT COMBI WALL HUNG GAS BOILER



- Use for CH/DHW
- Space optimization design
- Multiplicity and powerful function
- All-sided safety protection
- Eco/Comfort function in domestic hot water mode
- Electronic flame modulation in both central heating and domestic hot water mode
- Excellent and superior quality



**> KEY**

- 1 G3/4" CH water inlet
- 2 G1/2" DHW outlet



- 3 G1/2" - (DC) 3/4" Gas inlet (AC)
- 4 G1/2" Tap water inlet
- 5 G3/4" CH water return

| MODEL                                    |        | 18 kW   |      | 24 kW   |      |
|--|--------|---------|------|---------|------|
| Power                                    |        | max     | min  | max     | min  |
| Rated heat input                         | kW     | 20.0    | 9.3  | 26.3    | 9.51 |
| Rated heat output 80°C - 60°C            | kW     | 18.0    | 7.8  | 24.0    | 8.15 |
| Rated heat input of sanitary hot water   | kW     | 26.3    | 9.51 | 26.3    | 9.51 |
| Rated heat output of sanitary hot water  | KW     | 18.0    | 7.8  | 24.0    | 8.15 |
| Natural gas nozzle (G20)                 | mm     | 8X1.28  |      | 12X1.28 |      |
| Natural gas supply pressure (G20)        | Pa     | 2000    |      | 2000    |      |
| Lpg nozzle (G31)                         | mm     | 12X0.81 |      | 12X0.81 |      |
| Lpg supply pressure (g31)                | Pa     | 2800    |      | 2800    |      |
| Max working temperature                  | °C     | 90      |      | 90      |      |
| Max working pressure                     | MPa    | 3       |      | 3       |      |
| Safety valve release pressure            | MPa    | 3       |      | 3       |      |
| Min heating pressure                     | MPa    | 0.8     |      | 0.8     |      |
| Volume of expansion water tank           | l      | 6       |      | 6       |      |
| Initial pressure of expansion water tank | MPa    | 0.1     |      | 0.1     |      |
| Volume of wall-hung boiler               | l      | 1.0     |      | 1.0     |      |
| Max hot water production rate (Δt=25k)   | kg/min | 10.3    |      | 13.6    |      |
| Max hot water production rate (Δt=30k)   | kg/min | 8.6     |      | 11.3    |      |
| Max working pressure of hot water        | MPa    | 0.8     |      | 0.8     |      |
| Min working pressure of hot water        | MPa    | 0.025   |      | 0.025   |      |
| Sanitary hot water volume                | l      | 0.3     |      | 0.4     |      |
| Height                                   | mm     | 655     |      | 740     |      |
| Width                                    | mm     | 350     |      | 440     |      |
| Thickness                                | mm     | 230     |      | 235     |      |
| Net weight                               | Kg     | 29.0    |      | 29.0    |      |
| Gas supply joint                         | inches | 1/2"    |      | 1/2"    |      |
| Heating pipe joint                       | inches | 3/4"    |      | 3/4"    |      |
| Sanitary hot water joint                 | inches | 1/2"    |      | 1/2"    |      |
| Max electric power                       | W      | 110     |      | 110     |      |
| Voltage/frequency                        | V/Hz   | 230/50  |      | 230/50  |      |
| Protection class                         | IP     | X5D     |      | X5D     |      |



### > STRENGTHS:

- Use for CH/DHW
- Humanity control panel with lcd display
- Space optimization design
- Multiplicity and powerful function
- All-sided safety protection
- Eco/comfort function in domestic hot water mode
- Electronic flame modulation in both central heating and domestic hot water mode
- Excellent and superior quality

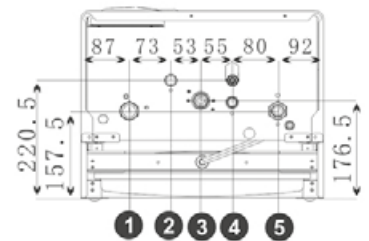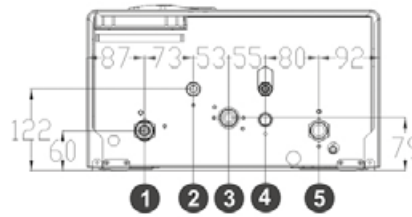

### > KEY

- 1 G3/4" CH water inlet
- 2 G1/2" DHW outlet

- 3 G1/2" - (DC) 3/4" Gas inlet (AC)
- 4 G1/2" Tap water inlet
- 5 G3/4" CH water return

| MODEL                                    |        | 10 kW     |     | 13 kW     |     | 16 kW     |     | 18 kW     |     | 20 kW     |     | 24 kW     |     | 30 kW     |      | 32 kW     |      | 35 kW     |      | 40 kW     |      |
|--|--------|-----------|-----|-----------|-----|-----------|-----|-----------|-----|-----------|-----|-----------|-----|-----------|------|-----------|------|-----------|------|-----------|------|
| ERP Class                                |        | A         |     | A         |     |           |     |           |     |           |     |           |     |           |      |           |      |           |      |           |      |
| Power                                    |        | Max       | Min | Max       | Min | Max       | Min | Max       | Min | Max       | Min | Max       | Min | Max       | Min  | Max       | Min  | Max       | Min  | Max       | Min  |
| Rated heat input                         | kW     | 12.3      | 9.2 | 15.3      | 9.2 | 18.4      | 9.2 | 20.0      | 9.2 | 22.3      | 9.2 | 26.3      | 9.2 | 32.6      | 12.8 | 34.7      | 12.8 | 38.1      | 13.3 | 44.1      | 14.3 |
| Rated heat output 80°C-60°C              | kW     | 10.0      | 8.3 | 13.0      | 8.3 | 16.0      | 8.3 | 18.0      | 8.3 | 20.0      | 8.3 | 24.0      | 8.3 | 30.0      | 11.9 | 32.0      | 11.9 | 35.0      | 12.2 | 40.0      | 13.0 |
| Rated heat input of sanitary hot water   | kW     | 26.3      | 9.2 | 26.3      | 9.2 | 26.3      | 9.2 | 26.3      | 9.2 | 26.3      | 9.2 | 26.3      | 9.2 | 32.6      | 12.8 | 34.7      | 12.8 | 38.1      | 13.3 | 44.1      | 14.3 |
| Rated heat output of sanitary hot water  | kW     | 24.0      | 8.3 | 24.0      | 8.3 | 24.0      | 8.3 | 24.0      | 8.3 | 24.0      | 8.3 | 24.0      | 8.3 | 30.0      | 11.9 | 32.0      | 11.9 | 35.0      | 12.2 | 40.0      | 13.0 |
| Efficiency Pmax (80-60°C)                | %      | 89        |     | 89        |     | 89        |     | 89        |     | 89        |     | 89        |     | 89        |      | 89        |      | 89        |      | 89        |      |
| Efficiency Pmin (30%Pmax)                | %      | 85        |     | 85        |     | 85        |     | 85        |     | 85        |     | 85        |     | 85        |      | 85        |      | 85        |      | 85        |      |
| Natural gas nozzle (G20)                 | mm     | 12X1.28   |     | 12X1.28   |     | 12X1.28   |     | 12X1.28   |     | 12X1.28   |     | 12X1.28   |     | 15X1.30   |      | 15X1.30   |      | 18X1.30   |      | 21X1.30   |      |
| Natural gas supply pressure (G20)        | Pa     | 2000      |     | 2000      |     | 2000      |     | 2000      |     | 2000      |     | 2000      |     | 2000      |      | 2000      |      | 2000      |      | 2000      |      |
| Pressure at the burner (gas G20)         | mbar   | 3,1       | 1,5 | 4,3       | 1,5 | 6,0       | 1,5 | 7,0       | 1,5 | 9,0       | 1,5 | 12,0      | 1,5 | 12,5      | 1,0  | 13,5      | 1,0  | 12,0      | 1,0  | 11,0      | 1,0  |
| LPG nozzle (G30)                         | mm     | 12X0.79   |     | 12X0.79   |     | 12X0.79   |     | 12X0.79   |     | 12X0.79   |     | 12X0.79   |     | 15X0.82   |      | 15X0.82   |      | 18X0.82   |      | 21X0.82   |      |
| LPG supply pressure (G30)                | Pa     | 2800      |     | 2800      |     | 2800      |     | 2800      |     | 2800      |     | 2800      |     | 2800      |      | 2800      |      | 2800      |      | 2800      |      |
| Pressure at the burner (gas G30)         | mbar   | 4,5       | 2,5 | 8,0       | 2,5 | 11,0      | 2,5 | 13,5      | 2,5 | 16,0      | 2,5 | 21,0      | 2,5 | 20,0      | 2,5  | 21,0      | 2,5  | 20,0      | 2,5  | 20,0      | 2,5  |
| Max working temperature                  | °C     | 90        |     | 90        |     | 90        |     | 90        |     | 90        |     | 90        |     | 90        |      | 90        |      | 90        |      | 90        |      |
| Max working pressure                     | MPa    | 0.3       |     | 0.3       |     | 0.3       |     | 0.3       |     | 0.3       |     | 0.3       |     | 0.3       |      | 0.3       |      | 0.3       |      | 0.3       |      |
| Safety valve release pressure            | MPa    | 0.3       |     | 0.3       |     | 0.3       |     | 0.3       |     | 0.3       |     | 0.3       |     | 0.3       |      | 0.3       |      | 0.3       |      | 0.3       |      |
| Min heating pressure                     | MPa    | 0.08      |     | 0.08      |     | 0.08      |     | 0.08      |     | 0.08      |     | 0.08      |     | 0.08      |      | 0.08      |      | 0.08      |      | 0.08      |      |
| Volume of expansion water tank           | l      | 6         |     | 6         |     | 6         |     | 6         |     | 6         |     | 6         |     | 8         |      | 8         |      | 8         |      | 10        |      |
| Initial pressure of expansion water tank | MPa    | 0.1       |     | 0.1       |     | 0.1       |     | 0.1       |     | 0.1       |     | 0.1       |     | 0.1       |      | 0.1       |      | 0.1       |      | 0.1       |      |
| Volume of wall-hung boiler               | l      | 1.0       |     | 1.0       |     | 1.0       |     | 1.0       |     | 1.0       |     | 1.0       |     | 1.2       |      | 1.2       |      | 1.2       |      | 1.5       |      |
| Max. hot water production rate Δt=25k    | kg/min | 13.6      |     | 13.6      |     | 13.6      |     | 13.6      |     | 13.6      |     | 13.6      |     | 16.2      |      | 17.2      |      | 18.4      |      | 20.6      |      |
| Max hot water production rate (Δt=30k)   | kg/min | 11.3      |     | 11.3      |     | 11.3      |     | 11.3      |     | 11.3      |     | 11.3      |     | 12.3      |      | 14.3      |      | 15.5      |      | 17.6      |      |
| Max working pressure of hot water        | MPa    | 0.8       |     | 0.8       |     | 0.8       |     | 0.8       |     | 0.8       |     | 0.8       |     | 0.8       |      | 0.8       |      | 0.8       |      | 0.8       |      |
| Min working pressure of hot water        | MPa    | 0.025     |     | 0.025     |     | 0.025     |     | 0.025     |     | 0.025     |     | 0.025     |     | 0.025     |      | 0.025     |      | 0.025     |      | 0.025     |      |
| Sanitary hot water volume                | l      | 0.40      |     | 0.40      |     | 0.40      |     | 0.40      |     | 0.40      |     | 0.40      |     | 0.50      |      | 0.50      |      | 0.60      |      | 0.80      |      |
| Max system performance DHW               | l/min  | 12        |     | 12        |     | 12        |     | 12        |     | 12        |     | 12        |     | 14        |      | 14        |      | 16        |      | 18        |      |
| Height / Width                           | mm     | 740 / 440 |     | 740 / 440 |     | 740 / 440 |     | 740 / 440 |     | 740 / 440 |     | 740 / 440 |     | 740 / 440 |      | 740 / 440 |      | 740 / 440 |      | 740 / 500 |      |
| Thickness                                | mm     | 235       |     | 235       |     | 235       |     | 235       |     | 235       |     | 235       |     | 340       |      | 340       |      | 340       |      | 340       |      |
| Net weight                               | kg     | 28.8      |     | 28.8      |     | 28.8      |     | 28.8      |     | 28.8      |     | 28.8      |     | 36.7      |      | 36.7      |      | 37.5      |      | 40.3      |      |
| Gas supply joint                         | inches | 1/2"      |     | 1/2"      |     | 1/2"      |     | 1/2"      |     | 1/2"      |     | 1/2"      |     | 1/2"      |      | 1/2"      |      | 1/2"      |      | 1/2"      |      |
| Heating pipe joint                       | inches | 3/4"      |     | 3/4"      |     | 3/4"      |     | 3/4"      |     | 3/4"      |     | 3/4"      |     | 3/4"      |      | 3/4"      |      | 3/4"      |      | 3/4"      |      |
| Sanitary hot water joint                 | inches | 1/2"      |     | 1/2"      |     | 1/2"      |     | 1/2"      |     | 1/2"      |     | 1/2"      |     | 1/2"      |      | 1/2"      |      | 1/2"      |      | 1/2"      |      |
| Max electric power                       | W      | 110       |     | 110       |     | 110       |     | 110       |     | 110       |     | 110       |     | 110       |      | 110       |      | 110       |      | 110       |      |
| Voltage/frequency                        | V/Hz   | 230/50    |     | 230/50    |     | 230/50    |     | 230/50    |     | 230/50    |     | 230/50    |     | 230/50    |      | 230/50    |      | 230/50    |      | 230/50    |      |
| Protection class                         | IP     | X5D       |     | X5D       |     | X5D       |     | X5D       |     | X5D       |     | X5D       |     | X5D       |      | X5D       |      | X5D       |      | X5D       |      |



# BOILERS FLOOR STANDING



## PRODUCT COMPLIANT WITH ERP (ECODESIGN - LABELLING) REGULATIONS

- Minimum efficiency for DHW/heating (of 26/09/2015)
- Minimum efficiency for pump (of 01/08/2015)

-  CONDENSING
-  TRADITIONAL

## BOILERS

|                     |    |
|---------------------|----|
| BLUEHELIX B         | 38 |
| BLUEHELIX B K 50    | 40 |
| BLUEHELIX B S K 100 | 42 |

## COMMERCIAL GENERATORS

|                 |    |
|-----------------|----|
| OPERA           | 44 |
| QUADRIFOGLIO B  | 49 |
| TP3 COND        | 54 |
| PREXTHERM RSW N | 56 |
| PREXTHERM RSW   | 58 |
| TP3 LN          | 59 |

## THERMAL UNITS

|                          |    |
|--------------------------|----|
| ATLAS D ECO COND UNIT    | 61 |
| ATLAS D ECO COND SI UNIT | 62 |
| ATLAS D ECO COND K UNIT  | 63 |
| ATLAS D                  | 64 |
| ATLAS D ECO UNIT         | 65 |
| ATLAS D ECO SI UNIT      | 66 |
| ATLAS D ECO K UNIT       | 67 |
| ATLAS                    | 68 |
| GN2 N                    | 69 |
| GN4 N                    | 70 |
| PEGASUS 23-32-45         | 71 |
| PEGASUS T                | 72 |
| PEGASUS D 23-32-45       | 73 |
| PEGASUS D K 130          | 74 |
| PEGASUS                  | 75 |

## ACCESSORIES

|  |    |
|--|----|
| CONDENSATION LINE FLUE GAS ACCESSORIES | 76 |
|--|----|

|                   |     |
|-------------------|-----|
| SYSTEM COMPONENTS | 121 |
|-------------------|-----|

# BLUEHELIX B FLOOR STANDING CONDENSING BOILER, FOR HEATING ONLY





## > STRENGTHS:

- It reaches **one of the highest seasonal space heating efficiencies** in its category:  $\eta_s$  **94%** (only mod. 35)
- **A+ SYSTEM**: combined with the modulating remote control and the outdoor probe (optional) it reaches the top efficiency class **A+** (scale from G to A+++)
- **Stainless steel** primary heat exchanger
- **Stainless steel full pre-mixing burner** with broad modulating range
- **Low consumption modulating heat pump (ErP Ready - Class A)**
- **Digital commands with user interface display**, multi-purpose for easily and correctly entering parameters
- **Can be combined with the modulating remote control**
- **Easily accessible hydraulic and gas fittings** to facilitate replacing old generators
- **Flue gas discharge with spilt or coaxial pipes**; possibility of right, left or rear outlet

## > ADVANTAGES OF BLUEHELIX B:


- **Minimum polluting emissions** (class 6 according to EN 15502-1)
- **Sliding temperature operating mode** in combination with the optional outdoor probe
- **Exchanger protection function** with  $\Delta t$  control
- **Timed circulator block protection**
- **Digital flame control** with three reignition tries if operation gets blocked due to failed flame detection (only in natural gas mode)
- **Antifrost function** with standard protection down to  $-5^{\circ}\text{C}$

\* only mod. 35



| MODEL                      |                             |                 | B 35            | B S 45          |
|----------------------------|-----------------------------|-----------------|-----------------|-----------------|
| ERP Class                  |                             | (Class G - A++) | <b>A</b>        | <b>A</b>        |
| Heat input (L.C.V.)        | Heating Min / Max           | kW              | 6.7 / 32.0      | 7.5 / 43.0      |
| Heat output                | 80°C-60°C Heating Min / Max | kW              | 6.6 / 31.4      | 7.3 / 42.1      |
|                            | 50°C-30°C Heating Min / Max | kW              | 7.2 / 34.0      | 8.1 / 45.6      |
| Useful thermal efficiency  | 80°C-60°C                   | Pmax % / Pmin % | 98.0 / 97.8     | 98.0 / 97.8     |
|                            | 50°C-30°C                   | Pmax % / Pmin % | 106.1 / 107.5   | 106.1 / 107.5   |
|                            | Reduced load 30%            | Pmax %          | 108.8           | 108.8           |
| Nox emissions class        |                             | class           | 6               | 6               |
| Heating operating pressure | Max                         | bar             | 3               | 3               |
| Empty weight               |                             | kg              | 69              | 69              |
| <b>CODE</b>                | <b>NATURAL GAS</b>          |                 | <b>0TA03AWA</b> | <b>0TAD5AWA</b> |

## BLUEHELIX B

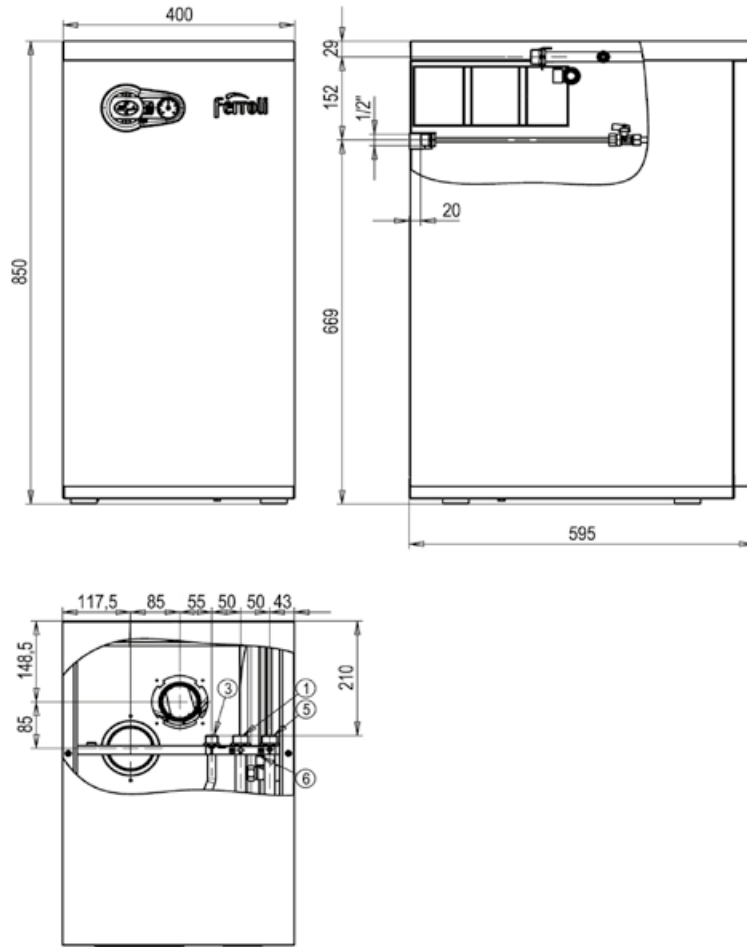




### > KEY

- 1 3/4" system flow
- 3 1/2" gas inlet

- 5 3/4" system return
- 6 safety valve discharge

## > HYDRAULIC AND CONTROL ACCESSORIES - STARTING FLUE ACCESSORIES

| DESCRIPTION   |  | CODE                  |
|---|--|-----------------------|
|  | outdoor probe                          | 013018X0              |
|  | additional sensor for DHW storage tank | cable 2 m<br>1KWMA11W |
|   |  | cable 5 m<br>043005X0 |

| DESCRIPTION  |   | CODE     |
|--|---|----------|
|  | 90° coaxial bend, 360° swivel with 45° pitch ø 100/60 mm for condensing boilers | 041001X0 |
|  | discharge kit twin pipes 80/80 complete with test point                         | 041065X0 |
|  | kit for management with thermostat (not supplied) of a dhw storage tank         | 013017X0 |

# BLUEHELIX B K 50 FLOOR STANDING CONDENSING BOILER, STAINLESS STEEL DHW STORAGE



## > STRENGTHS:

- It reaches **one of the highest seasonal space heating efficiencies** in its category:  $\eta_s$  94%
- **A+ SYSTEM**: combined with the modulating remote control and the outdoor probe (optional) it reaches the top efficiency class **A+** (scale from G to A+++)
- **Stainless steel** primary heat exchanger
- **Production of domestic hot water** with 50-litre stainless steel storage with fitting for recirculation
- **Stainless steel full pre-mixing burner** with broad modulating range
- **Low consumption modulating heat pump (ErP Ready - Class A)**
- **Digital commands with user interface display**, multi-purpose for easily and correctly entering parameters
- **Can be combined with the modulating remote control**
- **Easily accessible hydraulic and gas fittings** to facilitate replacing old generators
- **Flue gas discharge with spilt or coaxial pipes**; possibility of right, left or rear outlet

## > ADVANTAGES OF BLUEHELIX B K 50:


- **Minimum polluting emissions** (class 6 according to EN 15502-1)
- **Sliding temperature operating mode** in combination with the optional outdoor probe
- **Certified 3-star comfort** in DHW production mode in accordance with EN 13203, set forth by Reg. 812/2013
- **Exchanger protection function** with  $\Delta t$  control
- **Timed block protection** for circulator and three-way valve
- **Digital flame control** with three reignition tries if operation gets blocked due to failed flame detection (only in natural gas mode)
- **Antifrost function** with standard protection down to  $-5^{\circ}\text{C}$



| MODEL                         |                              |                              | B 32 K 50          |                    |
|-------------------------------|------------------------------|------------------------------|--------------------|--------------------|
| ERP Class                     |                              | (Class G - A++)              | <b>A</b>           |                    |
|                               |                              | (Class G - A)                | <b>A</b>           |                    |
| Heat input (L.C.V.)           | Heating Min / Max<br>DHW Max | kW<br>kW                     | 6.7 / 29.5<br>32.0 |                    |
| Heat output                   | 80°C-60°C                    | Heating Min / Max<br>DHW Max | kW<br>kW           | 6.6 / 28.9<br>31.4 |
|                               | 50°C-30°C                    | Heating Min / Max            | kW                 | 7.2 / 31.3         |
| Useful thermal efficiency     | 80°C-60°C                    | Pmax % / Pmin %              | 98.0 / 97.8        |                    |
|                               | 50°C-30°C                    | Pmax % / Pmin %              | 106.1 / 107.5      |                    |
|                               | Reduced load 30%             | Pmax %                       | 108.8              |                    |
| Nox emissions class           |                              | class                        | 6                  |                    |
| Storage tank capacity         |                              | litres                       | 50                 |                    |
| Domestic hot water production | $\Delta t$ 30°C              | l/10 min                     | 195                |                    |
|                               | $\Delta t$ 30°C              | l/h                          | 945                |                    |
| Heating operating pressure    | Max                          | bar                          | 3                  |                    |
| Domestic operating pressure   | Max                          | bar                          | 9                  |                    |
| Empty weight                  |                              | kg                           | 61                 |                    |
| <b>CODE</b>                   |                              | <b>NATURAL GAS</b>           | <b>OTAS3AWA</b>    |                    |



## BLUEHELIX B K 50

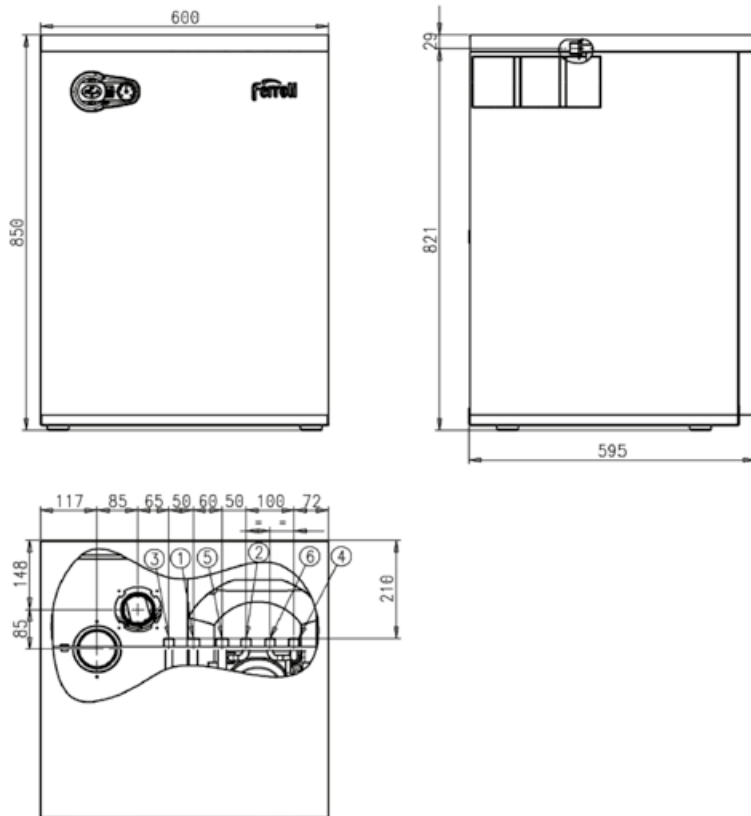



### > KEY

- 1 3/4" system flow
- 2 1/2" domestic hot water outlet
- 3 1/2" gas inlet


- 4 1/2" domestic cold water inlet
- 5 3/4" system return
- 6 1/2" recirculation

### > HYDRAULIC AND CONTROL ACCESSORIES - STARTING FLUE ACCESSORIES

| DESCRIPTION  | CODE     |
|--|----------|
| <br>outdoor probe | 013018X0 |

| DESCRIPTION  | CODE     |
|--|----------|
| <br>90° coaxial bend,<br>360° swivel with 45° pitch<br>ø 100/60 mm<br>for condensing boilers | 041001X0 |
| <br>discharge kit<br>twin pipes 80/80<br>complete with test point                            | 041065X0 |

# BLUEHELIX B S K 100 FLOOR STANDING CONDENSING BOILER, STAINLESS STEEL DHW STORAGE

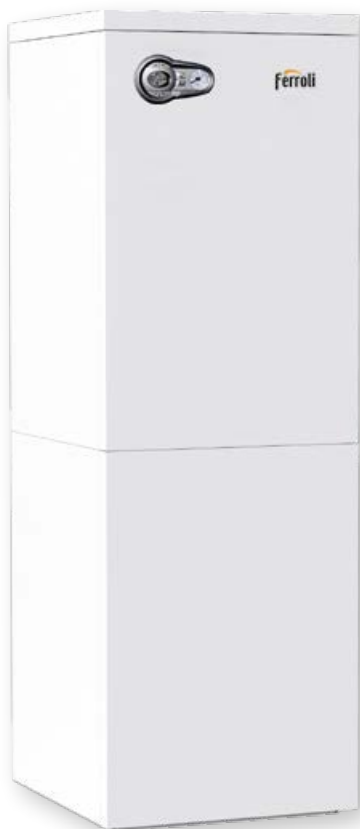

## > STRENGTHS:

- It reaches **one of the highest seasonal space heating efficiencies** in its category:  $\eta_s$  **94%**
- **A+ SYSTEM**: combined with the modulating remote control and the outdoor probe (optional) it reaches the top efficiency class **A+** (scale from G to A+++)
- **Stainless steel** primary heat exchanger
- **Production of domestic hot water** with 100-litre stainless steel storage with fitting for recirculation and front flange for inspection and maintenance
- **Stainless steel full pre-mixing burner** with broad modulating range
- **low consumption high efficiency modulating circulator** (ErP Ready - class A)
- **Digital commands with user interface display**, multi-purpose for easily and correctly entering parameters
- **Can be combined** with the modulating remote control
- **Easily accessible hydraulic and gas fittings** to facilitate replacing old generators
- **Flue gas exhaust with split or coaxial pipes**


## > ADVANTAGES OF BLUEHELIX B S K 100:

- **Minimum polluting emissions** (class 6 according to EN 15502-1)
- **Sliding temperature operating mode** in combination with the optional outdoor probe
- **Certified 3-star comfort** in DHW production mode in accordance with EN 13203, set forth by Reg. 812/2013
- **Exchanger protection function** with  $\Delta t$  control
- **Timed block protection** for circulator and three-way valve
- **Digital flame control** with three reignition tries if operation gets blocked due to failed flame detection (only in natural gas mode)
- Antifrost function with standard protection down to  $-5^{\circ}\text{C}$



| MODEL                                      |                                    |                    | B S 32 K 100             |
|--|------------------------------------|--------------------|--------------------------|
| ERP Class                                  |                                    | (Class G - A++)    | <b>A</b>                 |
|  |                                    | (Class G - A)      | <b>A</b>                 |
| Nominal heat input (LCV)                   | Min / Max heating<br>DHW Max / Min | kW<br>kW           | 6.7 / 29.5<br>6.7 / 32.0 |
| Heating heat output 80°C-60°C<br>50°C-30°C | Min / Max heating<br>DHW Max       | kW<br>kW           | 6.6 / 28.9<br>31.4       |
|  | Min / Max heating                  | kW                 | 7.2 / 31.3               |
| Useful thermal efficiency                  | 80°C-60°C                          | Pmax % / Pmin %    | 98.1 / 97.8              |
|  | 50°C-30°C                          | Pmax % / Pmin %    | 106.1 / 107.5            |
|  | Reduced load 30%                   | Pmax %             | 109.8                    |
| Storage tank capacity                      |                                    | litres             | 100                      |
| Domestic hot water production              | $\Delta t$ 30°C                    | l/h                | 1000                     |
|  | $\Delta t$ 30°C                    | l/10min            | 270                      |
| Heating operating pressure                 | Max Heating / DHW                  | bar                | 6 / 9                    |
| Domestic operating pressure                | Min Heating / DHW                  | bar                | 0.8 / 0.3                |
| Empty weight                               |                                    | kg                 | 110                      |
| <b>CODE</b>                                |                                    | <b>NATURAL GAS</b> | <b>OTAV3PWA</b>          |

## BLUEHELIX B S K 100

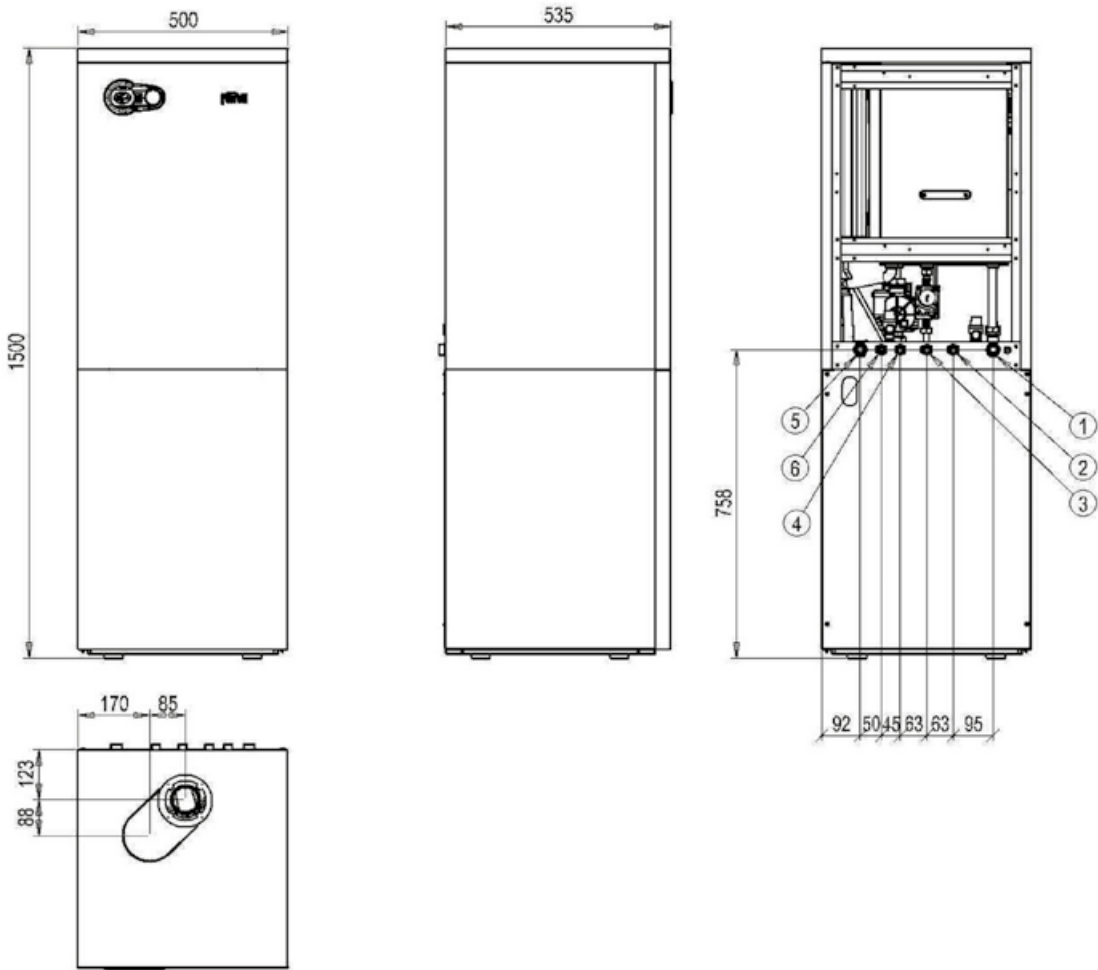

### > KEY

- 1 3/4" system flow
- 2 1/2" DHW outlet
- 3 1/2" gas inlet
- 4 1/2" DHW inlet
- 5 3/4" system return
- 6 1/2" recirculation

### > HYDRAULIC AND CONTROL ACCESSORIES - STARTING FLUE ACCESSORIES

| DESCRIPTION   | CODE     |
|---|----------|
|  outdoor probe   | 013018X0 |
|  coupling for vertical coaxial pipe<br>ø 100/60 mm<br>for condensing boilers | 041002X0 |

| DESCRIPTION   | CODE     |
|---|----------|
|  coupling for vertical coaxial pipe<br>ø 80/125 mm<br>for condensing boilers              | 041006X0 |
|  90° coaxial bend,<br>360° swivel with 45° pitch<br>ø 100/60 mm<br>for condensing boilers | 041001X0 |
|  discharge kit<br>twin pipes 80/80<br>for condensing boilers complete<br>with test point  | 041039X0 |

# OPERA CONDENSATION THERMAL GENERATOR FOR LARGE VOLUME OF WATER



## > STRENGTHS:

- **High power condensing thermal module with large water content**, designed for single or cascade installations, in combination with a complete range of water, gas and flue gas accessories, up to 960 kW
- Hydraulic, gas and flue gas accessories for cascade installation with 2 and 3 modules
- Flue gas tube heat exchanger, made with **AISI 316 Ti** stainless steel, with vertical configuration, helical cross-section, set up perpendicularly to the flue gas chamber
- Full pre-mixing combustion unit with metal fibre front combustion burner with very low emissions (**CLASS 6 according to EN 15502-1**). The modules can run on natural gas and LPG
- The combustion chamber has an extremely contained overall vertical dimension so that the exchange of water/flue gases can take place over the entire extension of the exchanger
- **Generator protection systems:** Double sensor (delivery and return) system for operation at **ΔT constant** (adjustable up to 60°C) / Flue gas safety sensor / Water pressure switch with minimum threshold at 0.8 bar
- Air / Flue gas circuit with intake in the installation site and **check valve integrated on the intake unit** to size the pressurised flue gas manifold
- Control panel protected by a door built into the outer casing with **key lock**
- **Four heavy-duty floating wheels** fitted per standard to facilitate unloading and mobility inside the thermal power plant. Adjustable feet for positioning


## > ADVANTAGES OF OPERA:

- It reaches **one of the highest seasonal space** heating efficiencies in its category: **η<sub>s</sub> 94%**
- combined with the modulating remote control and the outdoor probe (optional) it reaches **the top efficiency class A\*** (scale from G to A++)
- The **large volume of water** of the generator allows the boiler to be connected to the system without the need for separating devices and allows for a **very high design Δt**
- Management of the modules in cascade set-up with self-configuring **MASTER / SLAVE system**
- Setting of **switching on and off of generators** (which can be switched on and off in **sequence** or work simultaneously in **parallel**) through the control panel of the MASTER generator
- Electronics on board the machine to manage a **system with two direct zones and one DHW storage** or systems with differentiated temperatures (direct and mixed) in combination with the FZ4 B temperature control unit
- **RANGE RATED** certified generator to adjust the generated power to the system's needs by increasing the efficiency of the system and preserving the mechanics of the machine
- The modules can be controlled and conducted remotely: Regulation of power or temperature with **0 - 10V signal** / Signalling of block alarm for safety and restoration of operation / **OPENTHERM (OT) and MODBUS** parameterisable communication protocols
- Electronic control of microprocessor combustion allows **1/5 modulation on the single generator and of the 1/15 for the maximum configuration** (3 x 320 modules in cascade set-up)



| MODEL                              |                    |                 | 70             | 125                           | 220             | 320             |
|------------------------------------|--------------------|-----------------|----------------|-------------------------------|-----------------|-----------------|
| ERP Class                          |                    | (Class G - A++) |                | ENERGY LABELLING NOT RELEVANT |                 |                 |
| Heating heat input                 | Max / Min          | kW              | 65.5 / 14.0    | 116.0 / 23.0                  | 207.0 / 41.0    | 299.0 / 62.0    |
| Heat output (80°C / 60°C)          | Max / Min          | kW              | 64.4 / 13.7    | 114.0 / 22.5                  | 204.0 / 40.2    | 294.5 / 60.8    |
| Heat output (50°C / 30°C)          | Max / Min          | kW              | 69.9 / 15.0    | 125.0 / 24.8                  | 220.0 / 44.2    | 320.0 / 66.8    |
| Efficiency (80°C / 60°C)           | PMax / PMin        | %               | 98.3 / 98.0    | 98.3 / 98.0                   | 98.5 / 98.0     | 98.5 / 98.0     |
| Efficiency (50°C / 30°C)           | PMax / PMin        | %               | 106.8 / 107.7  | 106.8 / 107.7                 | 106.8 / 107.7   | 106.8 / 107.7   |
| Efficiency                         | 30% partial load   | %               | 109.6          | 109.6                         | 109.6           | 109.6           |
| NOx emissions class                |                    |                 | 6              | 6                             | 6               | 6               |
| CO (o <sub>2</sub> = 0%) weighted  |                    | mg / kWh        | 5.5            | 6                             | 8               | 20              |
| NOx (o <sub>2</sub> = 0%) weighted |                    | mg / kWh        | 18             | 17                            | 22              | 20              |
| Max operating pressure             | Max / Min          | bar             | 6 / 0.5        | 6 / 0.5                       | 6 / 0.5         | 6 / 0.5         |
| Water content of the generator     |                    | litres          | 160            | 265                           | 380             | 530             |
| Empty weight                       |                    | Kg              | 180            | 280                           | 400             | 500             |
| CODE                               | <b>NATURAL GAS</b> |                 | <b>ORB4AWA</b> | <b>ORB7AWA</b>                | <b>ORBMAAWA</b> | <b>ORBMDAWA</b> |

## IEWS AND DIMENSIONS

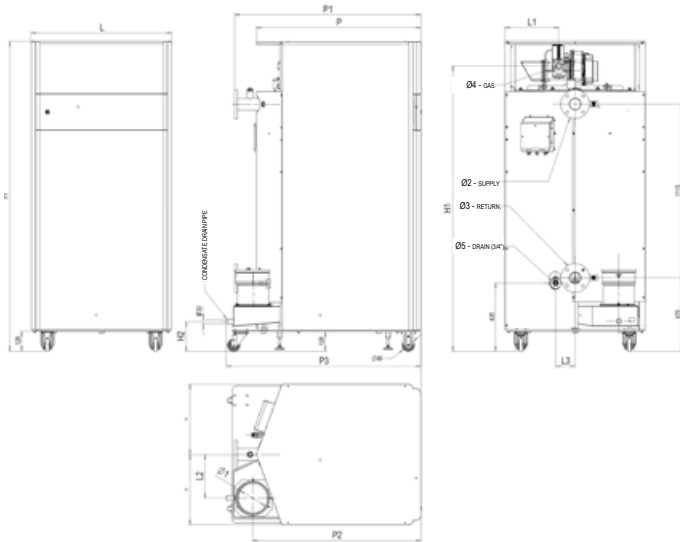

## > HYDRAULIC, GAS FITTINGS AND FLUE GAS OUTLETS

| MODEL                      | 70     | 125    | 220  | 320   |
|----------------------------|--------|--------|------|-------|
| Ø 1 Flue gas outlet Ø (mm) | 80     | 100    | 160  | 200   |
| Ø 2 System flow            | 1' 1/4 | 1' 1/4 | 2'   | DN 65 |
| Ø 3 System Return          | 1' 1/4 | 1' 1/4 | 2'   | DN 65 |
| Ø 4 Gas inlet              | 3/4'   | 1'     | 1'   | 1'    |
| Ø 5 Boiler discharge       | 3/4'   | 3/4'   | 3/4' | 3/4'  |

## > HEIGHTS AND DIMENSIONS

| ITEMS            | L   | L1  | L2  | L3  | H    | H1   | H2  | P    | P1   | P2   | P3   |
|------------------|-----|-----|-----|-----|------|------|-----|------|------|------|------|
|                  | mm  | mm  | mm  | mm  | mm   | mm   | mm  | mm   | mm   | mm   | mm   |
| <b>OPERA 70</b>  | 540 | 305 | 160 | 100 | 1910 | 1825 | 230 | 680  | 765  | 685  | 785  |
| <b>OPERA 125</b> | 660 | 385 | 210 | 100 | 1930 | 1840 | 220 | 800  | 895  | 815  | 935  |
| <b>OPERA 220</b> | 780 | 295 | 240 | 125 | 1960 | 1790 | 210 | 925  | 1055 | 955  | 1105 |
| <b>OPERA 320</b> | 900 | 345 | 280 | 125 | 1990 | 1830 | 190 | 1055 | 1080 | 1080 | 1225 |

## > ACCESSORIES FOR SINGLE AND CASCADE INSTALLATIONS

| DESCRIPTION |             | CODE         |
|-------------|-------------|--------------|
|             | DN50-1 1/2' | 042053X0     |
|             | DN65-2'     | 042054X0     |
|             | DN100-DN65  | 042055X0     |
|             | 1' 1/2-1'   | 042050X0     |
|             | 2' -1'      | 042051X0     |
|             | 2' 1/2-1'   | 042052X0     |
|             | DN50        | 042056X0     |
|             | DN65        | 042057X0     |
|             | DN100       | 042058X0     |
|             |             | 052000X0     |
|             |             |              |
|             |             | DN50 - 1'1/4 |
|             | DN65 - 2'   | 042066X0     |
|             | DN50        | 042059X0     |
|             | DN65        | 042060X0     |
|             | DN100       | 042061X0     |
|             | 1' 1/4      | 042062X0     |
|             | 2'          | 042063X0     |
|             | 2' - 1'1/4  | 042064X0     |
|             |             | 013018X0     |


| DESCRIPTION |   | CODE     |
|-------------|---|----------|
|             | 160 mm  | 041066X0 |
|             | 200 mm  | 041068X0 |
|             | 300 mm  | 041070X0 |
|             | 160 mm  | 041067X0 |
|             | 200 mm  | 041069X0 |
|             | 300 mm  | 041071X0 |
|             | 100 mm  | 041072X0 |
|             | 160 mm  | 041074X0 |
|             | 200 mm  | 041076X0 |
|             | 100 mm  | 041073X0 |
|             | 160 mm  | 041018X0 |
|             | 200 mm  | 041062X0 |
|             | 300 mm  | 041063X0 |
|             | 100mm   | 041077X0 |
|             | 160 mm  | 041015X0 |
|             | 200 mm  | 041060X0 |
|             | 300 mm  | 041061X0 |
|             | 80-100 mm   | 041078X0 |
|             | 100-160 mm  | 041079X0 |
|             | 160-200 mm  | 041080X0 |
|             | 160-200 mm  | 041080X0 |
|             | additional sensor for storage tank and/or system flow for cascade configurations with and without hydraulic separator | 1KWMA11W |
|             |   | 043005X0 |
|             |   |          |

> CASCADE INSTALLATIONS THAT COME WITH ALL OF THE ACCESSORIES


| HEAT INPUT | HEAT OUTPUT (1) |         | CASCADE MODULATION Pmin/Pmax | NR. OF MODULES | COMBINATION OF MODELS |     |     |
|------------|-----------------|---------|------------------------------|----------------|-----------------------|-----|-----|
|            | 80/60°C         | 50/30°C |                              |                | 1                     | 2   | 3   |
| kW         | kW              | kW      | kW                           |                |                       |     |     |
| 131.0      | 128.8           | 139.8   | 15.0/139.8                   | 2              | 70                    | 70  | -   |
| 181.5      | 178.4           | 194.9   | 15.0/194.9                   | 2              | 70                    | 125 | -   |
| 232.0      | 228.0           | 250.0   | 24.8/250.0                   | 2              | 125                   | 125 | -   |
| 247.0      | 242.8           | 264.8   | 15.0/264.8                   | 3              | 70                    | 70  | 125 |
| 297.5      | 292.4           | 319.9   | 15.0/319.9                   | 3              | 70                    | 125 | 125 |
| 323.0      | 318.0           | 345.0   | 24.8/345.0                   | 2              | 125                   | 220 | -   |
| 348.0      | 342.0           | 375.0   | 24.8/375.0                   | 3              | 125                   | 125 | 125 |
| 414.0      | 408.0           | 440.0   | 44.2/440.0                   | 2              | 220                   | 220 | -   |
| 439.0      | 432.0           | 470.0   | 24.8/470.0                   | 3              | 125                   | 125 | 220 |
| 506.0      | 498.5           | 540.0   | 44.2/540.0                   | 2              | -                     | 220 | 320 |
| 530.0      | 522.0           | 565.0   | 24.8/565.0                   | 3              | 125                   | 220 | 220 |
| 598.0      | 589.0           | 640.0   | 66.8/640.0                   | 2              | 320                   | 320 | -   |
| 621.0      | 612.0           | 660.0   | 44.2/660.0                   | 3              | 220                   | 220 | 220 |
| 713.0      | 702.5           | 760.0   | 44.2/760.0                   | 3              | 220                   | 220 | 320 |
| 805.0      | 793.0           | 860.0   | 44.2/860.0                   | 3              | 220                   | 320 | 320 |
| 897.0      | 883.5           | 960.0   | 66.8/960.0                   | 3              | 320                   | 320 | 320 |

Note: the Company does not provide the accessories for other configurations not shown in the table


FLUE GAS MANIFOLD  
LOW OUTLET

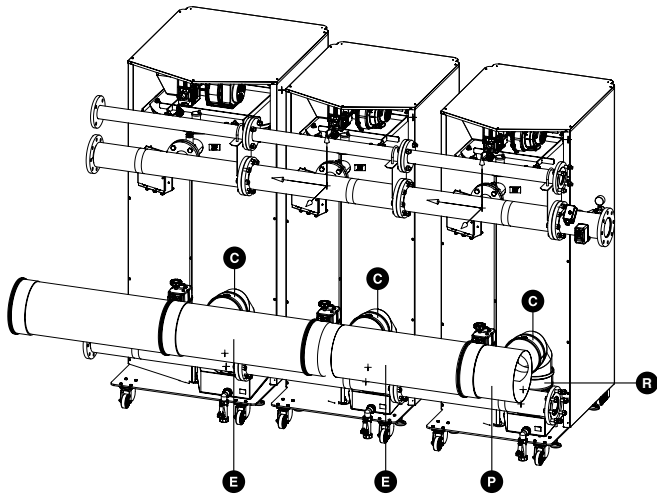


FLUE GAS MANIFOLD  
MEDIUM OUTLET

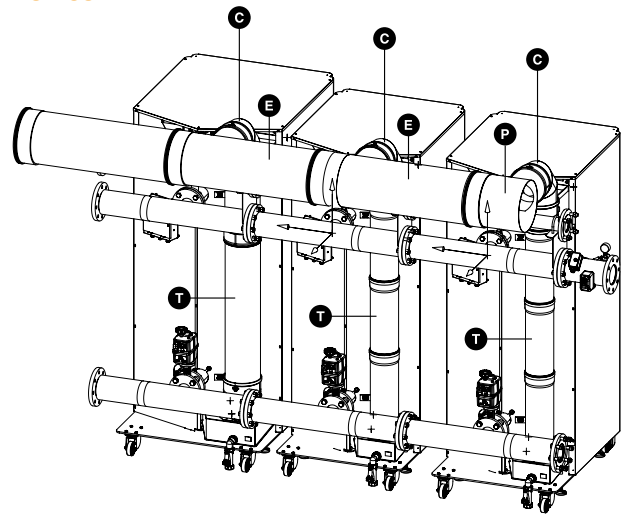

FLUE GAS MANIFOLD  
HIGH OUTLET

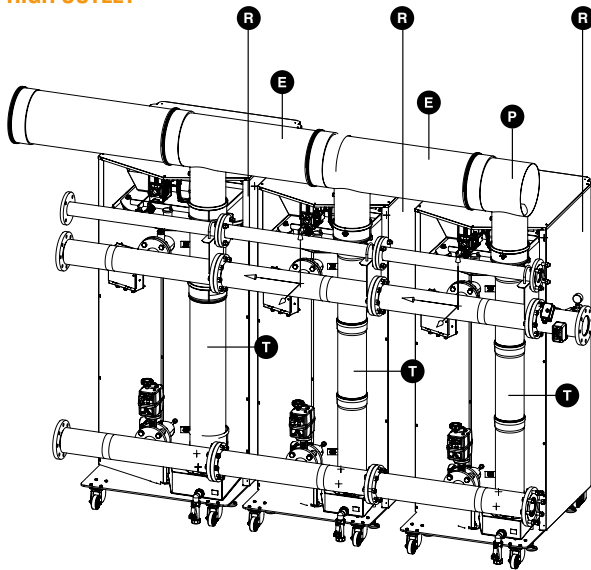

HYDRAULIC AND GAS MANIFOLDS

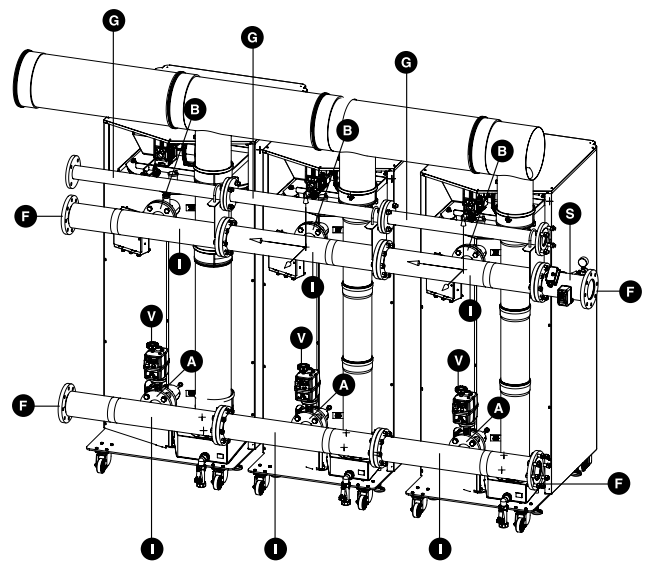

DESCRIPTION OF Cascade ACCESSORIES






- A Motorised shut-off valve fittings adapter
- B Boiler/manifold fittings adapter
- C 90° M - F polypropylene bend with gasket
- E Polypropylene flue gas manifold with gaskets
- F Manifold flange kit composed of a blind and perforated flange complete with gaskets, screws and nuts
- G Gas manifold complete with ball cock, hose, gaskets, screws and nuts

- I Hydraulic manifold complete with gaskets, screws and nuts
- P Blind flue gas manifold inlet complete with condensate drain trap
- R Reduction from manifold fitting to vertical section of the flue gas route, complete with gasket
- S Stub pipe for safety equipment (not supplied) complete with gaskets, screws and nuts
- T Exhaust pipe for the vertical section that connects the boiler flue gas outlet to the manifold, complete with gasket
- V Motorised butterfly shut-off valve

> CONFIGURATION OF ACCESSORIES FOR CASCADE INSTALLATIONS OF 2-3 GENERATORS

| CALORIFIC VALUE kW | MODULES OPERA |     |     | COLLECTOR | G        | G        | G        | I        | I        | I        | S        | S        | S        | F        | F        | F        | B        | B        | A        | A        | A        | V        | V        |   |
|--------------------|---------------|-----|-----|-----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---|
|                    | 1             | 2   | 3   |           | 042050X0 | 042051X0 | 042062X0 | 042063X0 | 042064X0 | 042065X0 | 042066X0 | 042067X0 | 042068X0 | 042069X0 | 042060X0 | 042061X0 | 042062X0 | 042063X0 | 042064X0 | 042065X0 | 042066X0 | 052000X0 | 052001X0 |   |
| 131.0              | 70            | 70  | -   | Gas       | 2        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          | 2        |          |          | 1        |          |          | 1        |          |          |          | 2        |          |          |          |          |          |   |
|                    |               |     |     | Return    |          |          |          | 2        |          |          |          |          |          |          | 1        |          |          |          |          |          |          | 4        |          | 2 |
| 181.5              | 70            | 125 | -   | Gas       | 2        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          | 2        |          |          | 1        |          |          | 1        |          |          |          | 2        |          |          |          |          |          |   |
|                    |               |     |     | Return    |          |          |          | 2        |          |          |          |          |          |          | 1        |          |          |          |          |          |          | 4        |          | 2 |
| 232.0              | 125           | 125 | -   | Gas       | 2        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          | 2        |          |          | 1        |          |          | 1        |          |          |          | 2        |          |          |          |          |          |   |
|                    |               |     |     | Return    |          |          |          | 2        |          |          |          |          |          |          | 1        |          |          |          |          |          |          | 4        |          | 2 |
| 247.0              | 70            | 70  | 125 | Gas       | 3        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          | 3        |          |          | 1        |          |          | 1        |          |          |          | 3        |          |          |          |          |          |   |
|                    |               |     |     | Return    |          |          |          | 3        |          |          |          |          |          |          | 1        |          |          |          |          |          |          | 6        |          | 3 |
| 297.0              | 70            | 125 | 125 | Gas       | 3        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          | 3        |          |          | 1        |          |          | 1        |          |          |          | 3        |          |          |          |          |          |   |
|                    |               |     |     | Return    |          |          |          | 3        |          |          |          |          |          |          | 1        |          |          |          |          |          |          | 6        |          | 3 |
| 323.0              | 125           | 220 | -   | Gas       |          | 2        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          |          | 2        |          |          | 1        |          |          | 1        |          |          |          | 2        | 1        |          |          |          |   |
|                    |               |     |     | Return    |          |          |          |          | 2        |          |          |          |          |          | 1        |          |          |          |          | 1        |          | 4        |          | 2 |
| 348.0              | 125           | 125 | 125 | Gas       |          | 3        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          |          | 3        |          |          | 1        |          |          | 1        |          |          | 3        | 3        |          |          |          |          |   |
|                    |               |     |     | Return    |          |          |          |          | 3        |          |          |          |          |          | 1        |          |          |          | 3        | 3        |          | 6        |          | 3 |
| 414.0              | 220           | 220 | -   | Gas       |          | 2        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          |          | 2        |          |          | 1        |          |          | 1        |          |          |          | 2        |          |          |          |          |   |
|                    |               |     |     | Return    |          |          |          |          | 2        |          |          |          |          |          | 1        |          |          |          |          |          |          | 4        |          | 2 |
| 439.0              | 125           | 125 | 220 | Gas       |          | 3        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          |          | 3        |          |          | 1        |          |          | 1        |          |          | 3        | 2        |          |          |          |          |   |
|                    |               |     |     | Return    |          |          |          |          | 3        |          |          |          |          |          | 1        |          |          |          | 2        |          | 6        |          | 3        |   |
| 506.0              | 220           | 320 | -   | Gas       |          |          | 2        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          |          |          | 2        |          |          | 1        |          |          | 1        |          |          |          |          |          |          | 1        |   |
|                    |               |     |     | Return    |          |          |          |          |          | 2        |          |          |          |          |          | 1        |          |          |          |          |          | 1        |          | 2 |
| 530.0              | 125           | 220 | 220 | Gas       |          | 3        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          |          | 3        |          |          | 1        |          |          | 1        |          |          | 3        | 1        |          |          |          |          |   |
|                    |               |     |     | Return    |          |          |          |          | 3        |          |          |          |          |          | 1        |          |          |          | 1        |          | 6        |          | 3        |   |
| 598.0              | 320           | 320 | -   | Gas       |          |          | 2        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          |          |          | 2        |          |          | 1        |          |          | 1        |          |          |          |          |          |          |          |   |
|                    |               |     |     | Return    |          |          |          |          |          | 2        |          |          |          |          |          | 1        |          |          |          |          |          |          |          | 2 |
| 621.0              | 220           | 220 | 220 | Gas       |          | 3        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          |          |          | 3        |          |          | 1        |          |          | 1        |          |          |          |          |          |          | 3        |   |
|                    |               |     |     | Return    |          |          |          |          |          | 3        |          |          |          |          |          | 1        |          |          |          |          |          |          | 3        |   |
| 713.0              | 320           | 220 | 220 | Gas       |          |          | 3        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          |          |          | 3        |          |          | 1        |          |          | 1        |          |          |          |          |          |          | 2        |   |
|                    |               |     |     | Return    |          |          |          |          |          | 3        |          |          |          |          |          | 1        |          |          |          |          |          |          | 2        |   |
| 805.0              | 320           | 320 | 220 | Gas       |          |          | 3        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          |          |          | 3        |          |          | 1        |          |          | 1        |          |          |          |          |          |          | 1        |   |
|                    |               |     |     | Return    |          |          |          |          |          | 3        |          |          |          |          |          | 1        |          |          |          |          |          |          | 1        |   |
| 897.0              | 320           | 320 | 320 | Gas       |          |          | 3        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |   |
|                    |               |     |     | Flow      |          |          |          |          |          | 3        |          |          | 1        |          |          | 1        |          |          |          |          |          |          |          |   |
|                    |               |     |     | Return    |          |          |          |          |          | 3        |          |          |          |          |          | 1        |          |          |          |          |          |          |          |   |

CONFIGURATION OF ACCESSORIES FOR CASCADE INSTALLATIONS OF 2-3 GENERATORS

|                    |               |     |     | P   | P                              | P                              | E                             | E   | E                             | T                        | T                        | T  | T                        | T                       | T                        | T   | C                  | C                      | C                      | C   | R                           | R                           | R                          |          |     |   |
|--------------------|---------------|-----|-----|---|--------------------------------|--------------------------------|-------------------------------|---|-------------------------------|--------------------------|--------------------------|--|--------------------------|-------------------------|--------------------------|---|--------------------|------------------------|------------------------|---|-----------------------------|-----------------------------|----------------------------|----------|-----|---|
|                    |               |     |     | flue gas manifold d. 300 part.  | flue gas manifold d. 200 part. | flue gas manifold d. 160 part. | flue gas manifold d. 300 ext. | flue gas manifold d. 200 ext.   | flue gas manifold d. 160 ext. | pipe d. 300 MF, 1000 PPS | pipe d. 200 MF, 1000 PPS | pipe d. 200 MF, 500 PPS  | pipe d. 160 MF, 1000 PPS | pipe d. 160 MF, 500 PPS | pipe d. 100 MF, 1000 PPS | pipe d. 100 MF, 500 PPS   | 90° bend d. 300 MF | 90° bend d. 200 MF PPS | 90° bend d. 160 MF PPS | 90° bend d. 100 MF PPS  | reduction d. 160-200 MF PPS | reduction d. 100-160 MF PPS | reduction d. 80-100 MF PPS |          |     |   |
|                    |               |     |     |  |                                |                                |                               |  |                               |                          |                          |  |                          |                         |                          |  |                    |                        |                        |  |                             |                             |                            |          |     |   |
| CALORIFIC VALUE kW | MODULES OPERA |     |     | FLUE GAS EJECTION   | 041070X0                       | 041068X0                       | 041066X0                      | 041071X0  | 041069X0                      | 041067X0                 | 041063X0                 | 041062X0   | 041076X0                 | 041018X0                | 041074X0                 | 041073X0  | 041072X0           | 041061X0               | 041060X0               | 041015X0  | 041077X0                    | 041080X0                    | 041079X0                   | 041078X0 |     |   |
|                    | 1             | 2   | 3   |   | no.                            | no.                            | no.                           | no.   | no.                           | no.                      | no.                      | no.  | no.                      | no.                     | no.                      | no.   | no.                | no.                    | no.                    | no.   | no.                         | no.                         | no.                        | no.      | no. |   |
| 131.0              | 70            | 70  | -   | Low   |                                |                                | 1                             |   | 1                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        |   | 2                           |                             |                            | 2        |     |   |
|                    |               |     |     | Medium  |                                |                                | 1                             |   | 1                             |                          |                          |  |                          |                         |                          |   |                    | 2                      | 2                      |   |                             |                             | 2                          |          |     | 2 |
|                    |               |     |     | High  |                                |                                | 1                             |   | 1                             |                          |                          |  |                          |                         |                          |   |                    | 2                      | 2                      |   |                             |                             |                            |          |     |   |
| 181.5              | 70            | 125 | -   | Low   |                                |                                | 1                             |   | 1                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        |   |                             | 2                           |                            |          | 1   |   |
|                    |               |     |     | Medium  |                                |                                | 1                             |   | 1                             |                          |                          |  |                          |                         |                          |   |                    | 2                      | 2                      |   |                             |                             | 2                          |          |     | 1 |
|                    |               |     |     | High  |                                |                                | 1                             |   | 1                             |                          |                          |  |                          |                         |                          |   |                    | 2                      | 2                      |   |                             |                             |                            |          |     |   |
| 232.0              | 125           | 125 | -   | Low   |                                |                                | 1                             |   | 1                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        |   |                             | 2                           |                            |          |     |   |
|                    |               |     |     | Medium  |                                |                                | 1                             |   | 1                             |                          |                          |  |                          |                         |                          |   |                    | 2                      | 2                      |   |                             |                             | 2                          |          |     |   |
|                    |               |     |     | High  |                                |                                | 1                             |   | 1                             |                          |                          |  |                          |                         |                          |   |                    | 2                      | 2                      |   |                             |                             |                            |          |     |   |
| 247.0              | 70            | 70  | 125 | Low   |                                |                                | 1                             |   | 2                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        |   |                             | 3                           |                            |          | 2   |   |
|                    |               |     |     | Medium  |                                |                                | 1                             |   | 2                             |                          |                          |  |                          |                         |                          |   |                    | 3                      | 3                      |   |                             |                             | 3                          |          |     | 2 |
|                    |               |     |     | High  |                                |                                | 1                             |   | 2                             |                          |                          |  |                          |                         |                          |   |                    | 3                      | 3                      |   |                             |                             |                            |          |     |   |
| 297.0              | 70            | 125 | 125 | Low   |                                |                                | 1                             |   | 2                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        |   |                             | 3                           |                            |          | 1   |   |
|                    |               |     |     | Medium  |                                |                                | 1                             |   | 2                             |                          |                          |  |                          |                         |                          |   |                    | 3                      | 3                      |   |                             |                             | 3                          |          |     | 1 |
|                    |               |     |     | High  |                                |                                | 1                             |   | 2                             |                          |                          |  |                          |                         |                          |   |                    | 3                      | 3                      |   |                             |                             |                            |          |     |   |
| 323.0              | 125           | 220 | -   | Low   | 1                              |                                |                               |   | 1                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        |   | 2                           |                             |                            |          | 1   |   |
|                    |               |     |     | Medium  | 1                              |                                |                               |   | 1                             |                          |                          |  |                          |                         |                          | 1   | 2                  | 1                      | 1                      |   |                             | 2                           |                            |          |     | 1 |
|                    |               |     |     | High  | 1                              |                                |                               |   | 1                             |                          |                          |  |                          |                         |                          | 1   | 2                  | 1                      | 1                      |   |                             |                             |                            |          |     |   |
| 348.0              | 125           | 125 | 125 | Low   | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        |   | 3                           |                             |                            |          | 3   |   |
|                    |               |     |     | Medium  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         |                          |   |                    | 3                      | 3                      |   |                             |                             | 3                          |          |     | 3 |
|                    |               |     |     | High  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         |                          |   |                    | 3                      | 3                      |   |                             |                             |                            |          |     |   |
| 414.0              | 220           | 220 | -   | Low   | 1                              |                                |                               |   | 1                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        |   | 2                           |                             |                            |          |     |   |
|                    |               |     |     | Medium  | 1                              |                                |                               |   | 1                             |                          |                          |  |                          |                         | 2                        | 2   |                    |                        |                        |   | 2                           |                             |                            |          |     |   |
|                    |               |     |     | High  | 1                              |                                |                               |   | 1                             |                          |                          |  |                          |                         | 2                        | 2   |                    |                        |                        |   |                             |                             |                            |          |     |   |
| 439.0              | 125           | 125 | 220 | Low   | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        |   | 3                           |                             |                            |          | 2   |   |
|                    |               |     |     | Medium  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         | 1                        | 2   | 2                  | 2                      |                        |   |                             | 3                           |                            |          |     | 2 |
|                    |               |     |     | High  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         | 1                        | 2   | 2                  | 2                      |                        |   |                             |                             |                            |          |     |   |
| 506.0              | 220           | 320 | -   | Low   | 1                              |                                |                               | 1   |                               |                          |                          |  |                          |                         |                          |   |                    |                        |                        | 2   |                             |                             |                            | 1        |     |   |
|                    |               |     |     | Medium  | 1                              |                                |                               |   | 1                             |                          |                          |  | 1                        | 1                       |                          | 3   |                    |                        |                        | 2   |                             |                             |                            | 1        |     |   |
|                    |               |     |     | High  | 1                              |                                |                               |   | 1                             |                          |                          |  | 1                        | 1                       |                          | 3   |                    |                        |                        |   |                             |                             |                            | 1        |     |   |
| 530.0              | 125           | 220 | 220 | Low   | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        |   | 3                           |                             |                            |          | 1   |   |
|                    |               |     |     | Medium  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         | 2                        | 4   | 1                  | 1                      |                        |   | 3                           |                             |                            |          |     | 1 |
|                    |               |     |     | High  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         | 2                        | 4   | 1                  | 1                      |                        |   |                             | 3                           |                            |          |     |   |
| 598.0              | 320           | 320 | -   | Low   | 1                              |                                |                               | 1   |                               |                          |                          |  |                          |                         |                          |   |                    |                        |                        | 2   |                             |                             |                            |          |     |   |
|                    |               |     |     | Medium  | 1                              |                                |                               |   | 1                             |                          |                          |  | 2                        | 2                       |                          |   |                    |                        |                        | 2   |                             |                             |                            |          |     |   |
|                    |               |     |     | High  | 1                              |                                |                               |   | 1                             |                          |                          |  | 2                        | 2                       |                          |   |                    |                        |                        |   |                             |                             |                            |          |     |   |
| 621.0              | 220           | 220 | 220 | Low   | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        | 3   |                             |                             |                            | 3        |     |   |
|                    |               |     |     | Medium  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         |                          |   | 9                  |                        |                        |   | 3                           |                             |                            |          |     | 3 |
|                    |               |     |     | High  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         |                          |   | 9                  |                        |                        |   |                             |                             |                            |          |     |   |
| 713.0              | 320           | 220 | 220 | Low   | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        | 3   |                             |                             |                            | 2        |     |   |
|                    |               |     |     | Medium  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          | 1                       | 1                        |   | 6                  |                        |                        |   | 3                           |                             |                            |          |     | 2 |
|                    |               |     |     | High  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          | 1                       | 1                        |   | 6                  |                        |                        |   |                             |                             |                            |          |     |   |
| 805.0              | 320           | 320 | 220 | Low   | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        | 3   |                             |                             |                            | 1        |     |   |
|                    |               |     |     | Medium  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          | 2                       | 2                        |   | 3                  |                        |                        |   | 3                           |                             |                            |          | 1   |   |
|                    |               |     |     | High  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          | 2                       | 2                        |   | 3                  |                        |                        |   |                             |                             |                            |          | 1   |   |
| 897.0              | 320           | 320 | 320 | Low   | 1                              |                                |                               |   | 2                             |                          |                          |  |                          |                         |                          |   |                    |                        |                        | 3   |                             |                             |                            |          |     |   |
|                    |               |     |     | Medium  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          | 3                       | 3                        |   |                    |                        |                        |   | 3                           |                             |                            |          |     |   |
|                    |               |     |     | High  | 1                              |                                |                               |   | 2                             |                          |                          |  |                          | 3                       | 3                        |   |                    |                        |                        |   |                             |                             |                            |          |     |   |



# QUADRIFOGLIO B CONDENSATION PRE-MIXED STEEL THERMAL UNIT

ERP

SYSTEM  
scale G - A<sup>+</sup>



## > STRENGTHS:

- It reaches **one of the highest seasonal space heating efficiencies** in its category:  $\eta_s$  94%
- **SYSTEM A<sup>+</sup>**: combined with the modulating remote control and the outdoor probe (optional) it reaches the top efficiency class **A<sup>+</sup>** (scale from G to A<sup>+++</sup>)
- **Steel generator** with vertical configuration, low thermal load, large water content and passing flame
- **Stainless steel AISI 316 Ti exchanger** consisting of a pipe bundle with patented helical configuration and designed to optimise heat exchange and flue gas condensation
- **Low NOx micro-flame premixed burner with front combustion. The extremely contained overall vertical dimension** is such that the exchange of water/flue gases takes place over the entire extension of the exchanger. Quick opening system of the combustion chamber for inspection and maintenance
- **Control panel** with parameter adjustment and setting, large interface screen and on-off switch
- **Pit for installing the safety valve** as standard on the generator delivery circuit
- Generator supplied by standard complete with temperature probes on the delivery and return and minimum water pressure switch
- **Flue gas exhaust on the right and left sides** of the generator
- **Flue gas non-return system** for cascade installations, set up by standard on each generator
- **Broad and complete availability of hydraulic, gas and flue gas accessories** for cascade installations with **cascades of two or three generators**

## > ADVANTAGES OF QUADRIFOGLIO B:


- **Very high efficiency exceeding 109% in some working conditions**
- **Range characterised by a wide range of available powers, from 70 kW up to 960 kW** (cascade of 3 x 320 kW modules)
- **The large volume of water of the generator** allows the boiler to be connected to the system without the need for separating devices and allows for a very high design  $\Delta t$
- **Double return in boiler** for the management of systems with circuits operating at different operating temperatures, thereby always guaranteeing the best stratification inside the boiler body
- **Minimum polluting emissions** (class 6 according to EN 15502-1)
- **Electronic control of combustion** with a microprocessor that modulates the single generator up to 20% of the maximum power
- The generator electronics can manage **installations in cascade, the production of domestic hot water** with storage tank and **system pump** with sliding delivery temperature
- **Equipped with 0-10V** input control signal to control the delivery temperature or the operating power for both single generator or equivalent generator cascade

PHASING OUT



| MODEL                          |                    |                             | 70              | 125                           | 220             | 320             |
|--------------------------------|--------------------|-----------------------------|-----------------|-------------------------------|-----------------|-----------------|
| ERP Class                      |                    | (Class G - A <sup>+</sup> ) | <b>A</b>        | ENERGY LABELLING NOT RELEVANT |                 |                 |
| Heating heat input             | Max / Min          | kW                          | 65.5 / 14.0     | 116.0 / 23.0                  | 207.0 / 41.0    | 299.0 / 62.0    |
| Heat output (80°C / 60°C)      | Max / Min          | kW                          | 64.4 / 13.7     | 114.0 / 22.5                  | 204.0 / 40.2    | 294.5 / 60.8    |
| Heat output (50°C / 30°C)      | Max / Min          | kW                          | 69.9 / 15.0     | 125.0 / 24.8                  | 220.0 / 44.2    | 320.0 / 66.8    |
| Efficiency (80°C / 60°C)       | PMax / PMin        | %                           | 98.3 / 98.0     | 98.3 / 98.0                   | 98.5 / 98.0     | 98.5 / 98.0     |
| Efficiency (50°C / 30°C)       | PMax / PMin        | %                           | 106.8 / 107.7   | 106.8 / 107.7                 | 106.8 / 107.7   | 106.8 / 107.7   |
| Efficiency                     | 30% partial load   | %                           | 109.6           | 109.6                         | 109.6           | 109.6           |
| NOx emissions class            |                    |                             | 6               | 6                             | 6               | 6               |
| Water content of the generator |                    | litres                      | 160             | 265                           | 380             | 530             |
| Max operating pressure         | Max / Min          | bar                         | 6 / 0.5         | 6 / 0.5                       | 6 / 0.5         | 6 / 0.5         |
| Empty weight                   |                    | Kg                          | 180             | 280                           | 400             | 500             |
| <b>CODE</b>                    | <b>NATURAL GAS</b> |                             | <b>ORB020WA</b> | <b>ORB120WA</b>               | <b>ORB420WA</b> | <b>ORB620WA</b> |

## VIEWS AND DIMENSIONS

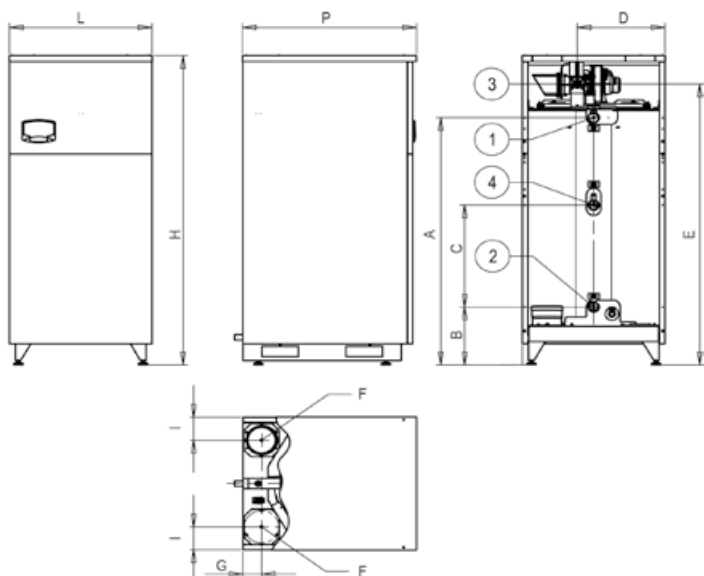

## HYDRAULIC, GAS FITTINGS AND FLUE GAS OUTLETS

| MODEL                            | 70     | 125    | 220 | 320   |
|----------------------------------|--------|--------|-----|-------|
| 1 System flow                    | 1' 1/4 | 1' 1/4 | 2'  | DN 65 |
| 2 Low temperature system return  | 1' 1/4 | 1' 1/4 | 2'  | DN 65 |
| 3 Gas inlet                      | 3/4'   | 1'     | 1'  | 1'    |
| 4 High temperature system return | 1' 1/4 | 1' 1/4 | 2'  | DN 65 |
| F Flue gas outlet Ø (mm)         | 80     | 100    | 160 | 200   |

## > HEIGHTS AND DIMENSIONS

| ITEMS                     | L   | H    | P    | A    | B   | C   | D   | E    | G   | I   |
|---------------------------|-----|------|------|------|-----|-----|-----|------|-----|-----|
| mm                        | mm  | mm   | mm   | mm   | mm  | mm  | mm  | mm   | mm  | mm  |
| <b>QUADRIFOGLIO B 70</b>  | 540 | 1760 | 668  | 1455 | 600 | 340 | 236 | 1685 | 62  | 95  |
| <b>QUADRIFOGLIO B 125</b> | 660 | 1780 | 808  | 1455 | 600 | 340 | 275 | 1690 | 72  | 105 |
| <b>QUADRIFOGLIO B 220</b> | 780 | 1820 | 953  | 1455 | 600 | 340 | 480 | 1665 | 103 | 135 |
| <b>QUADRIFOGLIO B 320</b> | 900 | 1850 | 1113 | 1455 | 600 | 340 | 540 | 1700 | 122 | 155 |

## > ACCESSORIES FOR SINGLE AND CASCADE INSTALLATIONS

| DESCRIPTION |   | CODE                  |
|-------------|---|-----------------------|
|             | kit for management with thermostat (not supplied) of a dhw storage tank (for heating only boilers)                    | 013017X0              |
|             | additional sensor for storage tank and/or system flow for cascade configurations with and without hydraulic separator | cable 2 m<br>1KWMA11W |
|             |   | cable 5 m<br>043005X0 |
|             | motorised butterfly valve, 230V - 50Hz powered DN 50<br><b>for model 70 and 125</b>                                   | 052000X0              |
|             | motorised butterfly valve, 230V - 50Hz powered DN 65<br><b>for model 220 and 320</b>                                  | 052001X0              |
|             | outdoor probe   | 013018X0              |
|             | gas manifold  | 1' 1/2-1' 042050X0    |
|             |   | 2' -1' 042051X0       |
|             |   | 2' 1/2-1' 042052X0    |
|             | hydraulic manifold  | DN50-1 1/2' 042053X0  |
|             |   | DN65-2' 042054X0      |
|             |   | DN100-DN65 042055X0   |
|             | stub pipe (completely equipped)   | DN50 042056X0         |
|             |   | DN65 042057X0         |
|             |   | DN100 042058X0        |
|             | flange kit (complete with nuts, bolts and gaskets)  | DN50 042059X0         |
|             |   | DN65 042060X0         |
|             |   | DN100 042061X0        |
|             | F - F coupling  | 1' 1/4 042062X0       |
|             |   | 2' 042063X0           |

| DESCRIPTION |  | CODE                  |
|-------------|--|-----------------------|
|             | M - F reduction nipple   | 2' - 1'1/4 042064X0   |
|             | flange - connection  | DN50 - 1'1/4 042065X0 |
|             |  | DN65 - 2' 042066X0    |
|             | flue gas manifold closing terminal   | 160 mm 041066X0       |
|             |  | 200 mm 041068X0       |
|             |  | 300 mm 041070X0       |
|             | flue gas manifold  | 160 mm 041067X0       |
|             |  | 200 mm 041069X0       |
|             |  | 300 mm 041071X0       |
|             | 500 mm PPS M/F flue gas pipe   | 100 mm 041072X0       |
|             |  | 160 mm 041074X0       |
|             |  | 200 mm 041076X0       |
|             | 1000 mm PPS M/F flue gas pipe  | 100 mm 041073X0       |
|             |  | 160 mm 041018X0       |
|             |  | 200 mm 041062X0       |
|             | PPS M/F 90° bend   | 300 mm 041063X0       |
|             |  | 100mm 041077X0        |
|             |  | 160 mm 041015X0       |
|             | PPS M/F reduction  | 200 mm 041060X0       |
|             |  | 300 mm 041061X0       |
|             |  | 80-100 mm 041078X0    |
|             | neutralisers (see chapter on condensation neutralisers for condensing boilers) | 100-160 mm 041079X0   |
|             |  | 160-200 mm 041080X0   |
|             |  |                       |


**RECOMMENDED CASCADE CONFIGURATION. GENUINE CASCADE ACCESSORIES AVAILABLE**

| HEAT INPUT | HEAT OUTPUT (1) |         | CASCADE MODULATION Pmin/Pmax | NR. OF MODULES | COMBINATION OF MODELS |     |     |
|------------|-----------------|---------|------------------------------|----------------|-----------------------|-----|-----|
|            | 80/60°C         | 50/30°C |                              |                | 1                     | 2   | 3   |
| kW         | kW              | kW      | kW                           |                |                       |     |     |
| 131.0      | 128.8           | 139.8   | 15.0/139.8                   | 2              | 70                    | 70  | -   |
| 181.5      | 178.4           | 194.9   | 15.0/194.9                   | 2              | 70                    | 125 | -   |
| 232.0      | 228.0           | 250.0   | 24.8/250.0                   | 2              | 125                   | 125 | -   |
| 247.0      | 242.8           | 264.8   | 15.0/264.8                   | 3              | 70                    | 70  | 125 |
| 297.5      | 292.4           | 319.9   | 15.0/319.9                   | 3              | 70                    | 125 | 125 |
| 323.0      | 318.0           | 345.0   | 24.8/345.0                   | 2              | 125                   | 220 | -   |
| 348.0      | 342.0           | 375.0   | 24.8/375.0                   | 3              | 125                   | 125 | 125 |
| 414.0      | 408.0           | 440.0   | 44.2/440.0                   | 2              | 220                   | 220 | -   |
| 439.0      | 432.0           | 470.0   | 24.8/470.0                   | 3              | 125                   | 125 | 220 |
| 506.0      | 498.5           | 540.0   | 44.2/540.0                   | 2              | -                     | 220 | 320 |
| 530.0      | 522.0           | 565.0   | 24.8/565.0                   | 3              | 125                   | 220 | 220 |
| 598.0      | 589.0           | 640.0   | 66.8/640.0                   | 2              | 320                   | 320 | -   |
| 621.0      | 612.0           | 660.0   | 44.2/660.0                   | 3              | 220                   | 220 | 220 |
| 713.0      | 702.5           | 760.0   | 44.2/760.0                   | 3              | 220                   | 220 | 320 |
| 805.0      | 793.0           | 860.0   | 44.2/860.0                   | 3              | 220                   | 320 | 320 |
| 897.0      | 883.5           | 960.0   | 66.8/960.0                   | 3              | 320                   | 320 | 320 |


Note: the Company does not provide the accessories for other configurations not shown in the table

**CONFIGURATION OF HYDRAULIC MANIFOLD AND GAS ACCESSORIES**


**FLUE GAS MANIFOLD LOW OUTLET**

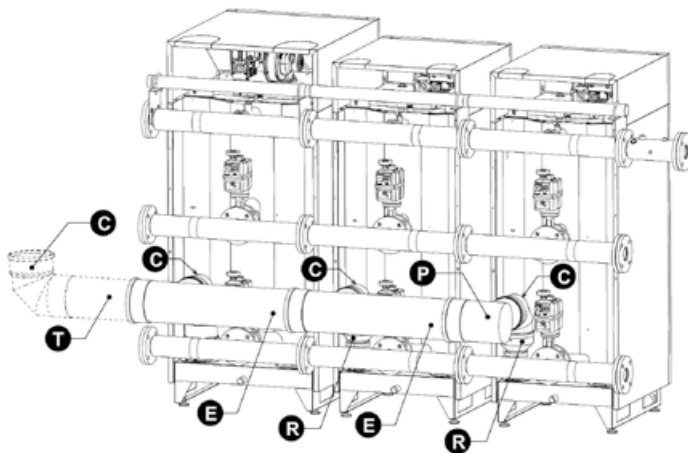


**FLUE GAS MANIFOLD MEDIUM OUTLET**

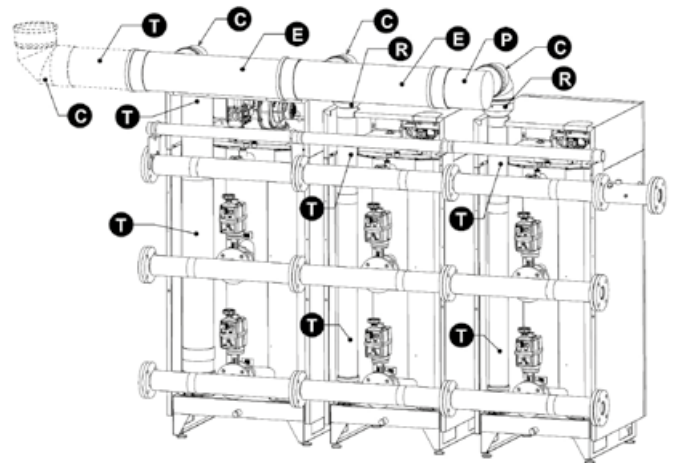

**FLUE GAS MANIFOLD HIGH OUTLET**

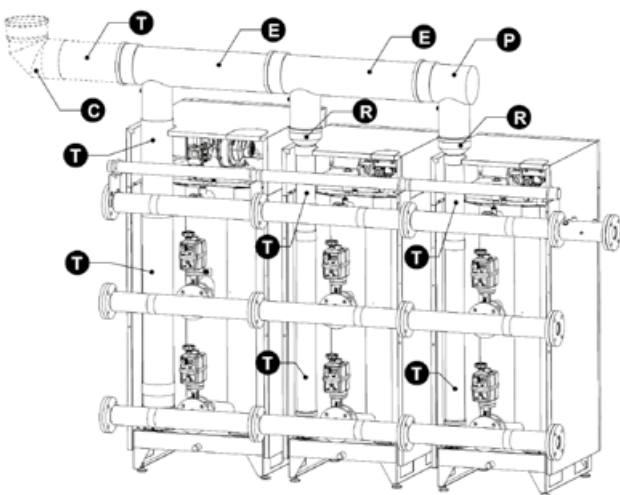

**HYDRAULIC AND GAS MANIFOLDS**

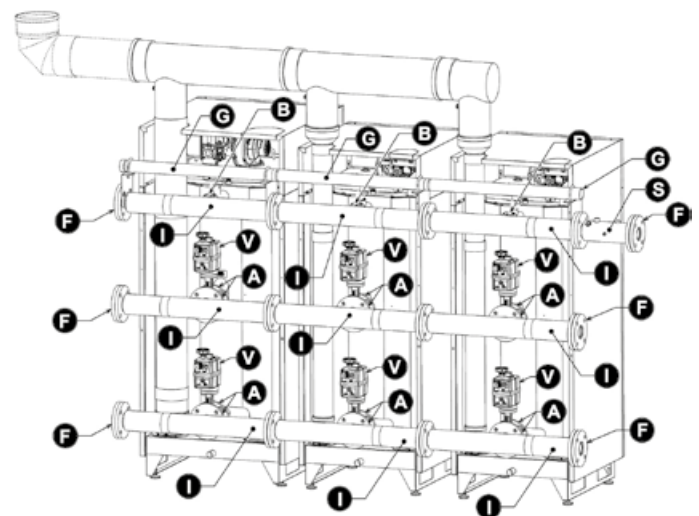









**DESCRIPTION OF CASCADE ACCESSORIES**






- A Motorised shut-off valve fittings adapter
- B Boiler/manifold fittings adapter
- C 90° M - F polypropylene bend with gasket
- E Polypropylene flue gas manifold with gaskets
- F Manifold flange kit composed of a blind and perforated flange complete with gaskets, screws and nuts
- G Gas manifold complete with ball cock, hose, gaskets, screws and nuts

- I Hydraulic manifold complete with gaskets, screws and nuts
- P Blind flue gas manifold inlet complete with condensate drain trap
- R Reduction from manifold fitting to vertical section of the flue gas route, complete with gasket
- S Stub pipe for safety equipment (not supplied) complete with gaskets, screws and nuts
- T Exhaust pipe for the vertical section that connects the boiler flue gas outlet to the manifold, complete with gasket
- V Motorised butterfly shut-off valve

> CONFIGURATION OF ACCESSORIES FOR CASCADE INSTALLATIONS OF 2-3 GENERATORS

|                    |                        |     |     | G   | G   | G   | I   | I   | I   | S   | S   | S   | F   | F   | F   | B   | B   | A   | A   | A   | V   | V   |          |
|--------------------|------------------------|-----|-----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|----------|
|                    |                        |     |     | 1 1/2"-1" gas manifold  | 2"-1" gas manifold  | 2" 1/2"-1" gas manifold   | DN50 - 2" hydraulic manifold  | DN65 - 2" hydraulic manifold  | DN100 - DN65 hydraulic manifold   | 2" - DN50 stub pipe   | 2 1/2" - DN65 stub pipe   | 4" - DN100 stub pipe  | DN50 flange-kit   | DN65 flange-kit   | DN100 flange kit  | 1 1/4" F - F coupling   | F-F 2" outlet   | 2" - 1 1/4" M-F reduction nipple  | flange DN50 - coupl. 1 1/4"   | flange DN65 - coupl. 2"   | butlerf. valv. lug elet DN50  | butlerf. valv. lug elet DN65  |          |
|                    |                        |     |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |          |
| CALORIFIC VALUE kW | MODULES QUADRIFOGLIO B |     |     | COLLECTOR   | 042050X0  | 042051X0  | 042052X0  | 042063X0  | 042054X0  | 042055X0  | 042056X0  | 042057X0  | 042058X0  | 042059X0  | 042060X0  | 042061X0  | 042062X0  | 042063X0  | 042064X0  | 042065X0  | 042066X0  | 052000X0  | 052001X0 |
|                    | 1                      | 2   | 3   |   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.      |
| 131.0              | 70                     | 70  | -   | Gas   | 2   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   | 2   |   |   | 1   |   |   | 1   |   |   | 2   |   |   |   |   |   |          |
|                    |                        |     |     | Return  |   |   |   | 2   |   |   |   |   |   | 1   |   |   |   |   | 4   |   |   | 2   |          |
| 181.5              | 70                     | 125 | -   | Gas   | 2   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   | 2   |   |   | 1   |   |   | 1   |   |   | 2   |   |   |   |   |   |          |
|                    |                        |     |     | Return  |   |   |   | 2   |   |   |   |   |   | 1   |   |   |   |   | 4   |   |   | 2   |          |
| 232.0              | 125                    | 125 | -   | Gas   | 2   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   | 2   |   |   | 1   |   |   | 1   |   |   | 2   |   |   |   |   |   |          |
|                    |                        |     |     | Return  |   |   |   | 2   |   |   |   |   |   | 1   |   |   |   |   | 4   |   |   | 2   |          |
| 247.0              | 70                     | 70  | 125 | Gas   | 3   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   | 3   |   |   | 1   |   |   | 1   |   |   | 3   |   |   |   |   |   |          |
|                    |                        |     |     | Return  |   |   |   | 3   |   |   |   |   |   | 1   |   |   |   |   | 6   |   |   | 3   |          |
| 297.0              | 70                     | 125 | 125 | Gas   | 3   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   | 3   |   |   | 1   |   |   | 1   |   |   | 3   |   |   |   |   |   |          |
|                    |                        |     |     | Return  |   |   |   | 3   |   |   |   |   |   | 1   |   |   |   |   | 6   |   |   | 3   |          |
| 323.0              | 125                    | 220 | -   | Gas   | 2   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   |   | 2   |   |   | 1   |   |   | 1   |   |   | 2   | 1   |   |   |   |          |
|                    |                        |     |     | Return  |   |   |   |   | 2   |   |   |   |   |   | 1   |   |   |   | 1   |   | 4   |   | 2        |
| 348.0              | 125                    | 125 | 125 | Gas   | 3   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   |   | 3   |   |   | 1   |   |   | 1   |   |   | 3   | 3   |   |   |   |          |
|                    |                        |     |     | Return  |   |   |   |   | 3   |   |   |   |   |   | 1   |   |   | 3   | 3   |   | 6   |   | 3        |
| 414.0              | 220                    | 220 | -   | Gas   | 2   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   |   | 2   |   |   | 1   |   |   | 1   |   |   | 2   |   |   |   |   |          |
|                    |                        |     |     | Return  |   |   |   |   | 2   |   |   |   |   |   | 1   |   |   |   |   |   | 4   |   | 2        |
| 439.0              | 125                    | 125 | 220 | Gas   | 3   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   |   | 3   |   |   | 1   |   |   | 1   |   |   | 3   | 2   |   |   |   |          |
|                    |                        |     |     | Return  |   |   |   |   | 3   |   |   |   |   |   | 1   |   |   | 2   | 2   |   | 6   |   | 3        |
| 506.0              | 220                    | 320 | -   | Gas   |   |   | 2   |   |   |   |   |   |   |   | 1   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   |   |   | 2   |   |   | 1   |   |   | 1   |   |   |   |   |   | 1   |          |
|                    |                        |     |     | Return  |   |   |   |   |   | 2   |   |   |   |   | 1   |   |   |   |   |   | 1   |   | 2        |
| 530.0              | 125                    | 220 | 220 | Gas   | 3   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   |   | 3   |   |   | 1   |   |   | 1   |   |   | 3   | 1   |   |   |   |          |
|                    |                        |     |     | Return  |   |   |   |   | 3   |   |   |   |   |   | 1   |   |   |   | 1   |   | 6   |   | 3        |
| 598.0              | 320                    | 320 | -   | Gas   |   |   | 2   |   |   |   |   |   |   |   | 1   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   |   |   | 2   |   |   | 1   |   |   | 1   |   |   |   |   |   |   |          |
|                    |                        |     |     | Return  |   |   |   |   |   | 2   |   |   |   |   |   | 1   |   |   |   |   |   |   | 2        |
| 621.0              | 220                    | 220 | 220 | Gas   |   |   | 3   |   |   |   |   |   |   |   | 1   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   |   |   | 3   |   |   | 1   |   |   | 1   |   |   |   |   | 3   |   |          |
|                    |                        |     |     | Return  |   |   |   |   |   | 3   |   |   |   |   |   | 1   |   |   |   |   | 3   |   | 3        |
| 713.0              | 320                    | 220 | 220 | Gas   |   |   | 3   |   |   |   |   |   |   |   | 1   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   |   |   | 3   |   |   | 1   |   |   | 1   |   |   |   |   | 2   |   |          |
|                    |                        |     |     | Return  |   |   |   |   |   | 3   |   |   |   |   |   | 1   |   |   |   |   | 2   |   | 3        |
| 805.0              | 320                    | 320 | 220 | Gas   |   |   | 3   |   |   |   |   |   |   |   | 1   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   |   |   | 3   |   |   | 1   |   |   | 1   |   |   |   |   | 1   |   |          |
|                    |                        |     |     | Return  |   |   |   |   |   | 3   |   |   |   |   |   | 1   |   |   |   |   | 1   |   | 3        |
| 897.0              | 320                    | 320 | 320 | Gas   |   |   | 3   |   |   |   |   |   |   |   | 1   |   |   |   |   |   |   |   |          |
|                    |                        |     |     | Delivery  |   |   |   |   |   | 3   |   |   | 1   |   |   | 1   |   |   |   |   |   |   |          |
|                    |                        |     |     | Return  |   |   |   |   |   | 3   |   |   |   |   |   | 1   |   |   |   |   |   |   | 3        |

> CONFIGURATION OF ACCESSORIES FOR CASCADE INSTALLATIONS OF 2-3 GENERATORS

|                    |                        |     |     | P   | P   | P  | E   | E   | E   | T   | T   | T   | T   | T   | T   | T   | C   | C   | C   | C   | R   | R   | R   |          |
|--------------------|------------------------|-----|-----|---|---|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|----------|
|                    |                        |     |     | flue gas manifold d. 300 part.  | flue gas manifold d. 200 part.  | flue gas manifold d. 160 part.   | flue gas manifold d. 300 ext.   | flue gas manifold d. 200 ext.   | flue gas manifold d. 160 ext.   | pipe d. 300 MF, 1000 PPS  | pipe d. 200 MF, 1000 PPS  | pipe d. 200 MF, 500 PPS   | pipe d. 160 MF, 1000 PPS  | pipe d. 160 mfl, 500 PPS  | pipe d. 100 MF, 1000 PPS  | pipe d. 100 MF, 500 PPS   | 90° bend d. 300 MF  | 90° bend d. 200 MF PPS  | 90° bend d. 160 MF PPS  | 90° bend d. 100 MF PPS  | reduction d. 160-200 MF PPS   | reduction d. 100-160 MF PPS   | reduction d. 80-100 MF PPS  |          |
|                    |                        |     |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |          |
| CALORIFIC VALUE kW | MODULES QUADRIFOGLIO B |     |     | FLUE GAS EJECTION   | 041070X0  | 041068X0   | 041066X0  | 041071X0  | 041069X0  | 041067X0  | 041063X0  | 041062X0  | 041076X0  | 041018X0  | 041074X0  | 041073X0  | 041072X0  | 041061X0  | 041060X0  | 041015X0  | 041077X0  | 041080X0  | 041079X0  | 041078X0 |
|                    | 1                      | 2   | 3   |   | no.   | no.  | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.   | no.      |
| 131.0              | 70                     | 70  | -   | Low   |   |  | 1   |   | 1   |   |   |   |   |   |   |   |   |   |   |   | 2   |   |   | 2        |
|                    |                        |     |     | Medium  |   |  | 1   |   | 1   |   |   |   |   |   |   | 2   | 2   |   |   |   | 2   |   |   | 2        |
|                    |                        |     |     | High  |   |  | 1   |   | 1   |   |   |   |   |   |   | 2   | 2   |   |   |   |   |   |   | 2        |
| 181.5              | 70                     | 125 | -   | Low   |   |  | 1   |   | 1   |   |   |   |   |   |   |   |   |   |   |   | 2   |   |   | 1        |
|                    |                        |     |     | Medium  |   |  | 1   |   | 1   |   |   |   |   |   |   | 2   | 2   |   |   |   | 2   |   |   | 1        |
|                    |                        |     |     | High  |   |  | 1   |   | 1   |   |   |   |   |   |   | 2   | 2   |   |   |   |   |   |   | 1        |
| 232.0              | 125                    | 125 | -   | Low   |   |  | 1   |   | 1   |   |   |   |   |   |   |   |   |   |   |   | 2   |   |   |          |
|                    |                        |     |     | Medium  |   |  | 1   |   | 1   |   |   |   |   |   |   | 2   | 2   |   |   |   | 2   |   |   |          |
|                    |                        |     |     | High  |   |  | 1   |   | 1   |   |   |   |   |   |   | 2   | 2   |   |   |   |   |   |   |          |
| 247.0              | 70                     | 70  | 125 | Low   |   |  | 1   |   | 2   |   |   |   |   |   |   |   |   |   |   |   | 3   |   |   | 2        |
|                    |                        |     |     | Medium  |   |  | 1   |   | 2   |   |   |   |   |   |   | 3   | 3   |   |   |   | 3   |   |   | 2        |
|                    |                        |     |     | High  |   |  | 1   |   | 2   |   |   |   |   |   |   | 3   | 3   |   |   |   |   |   |   | 2        |
| 297.0              | 70                     | 125 | 125 | Low   |   |  | 1   |   | 2   |   |   |   |   |   |   |   |   |   |   |   | 3   |   |   | 1        |
|                    |                        |     |     | Medium  |   |  | 1   |   | 2   |   |   |   |   |   |   | 3   | 3   |   |   |   | 3   |   |   | 1        |
|                    |                        |     |     | High  |   |  | 1   |   | 2   |   |   |   |   |   |   | 3   | 3   |   |   |   | 3   |   |   | 1        |
| 323.0              | 125                    | 220 | -   | Low   | 1   |  |   | 1   |   |   |   |   |   |   |   |   |   |   |   |   | 2   |   |   | 1        |
|                    |                        |     |     | Medium  | 1   |  |   | 1   |   |   |   |   | 1   | 2   | 1   | 1   |   |   |   |   | 2   |   |   | 1        |
|                    |                        |     |     | High  | 1   |  |   | 1   |   |   |   |   | 1   | 2   | 1   | 1   |   |   |   |   |   |   |   | 1        |
| 348.0              | 125                    | 125 | 125 | Low   | 1   |  |   | 2   |   |   |   |   |   |   |   |   |   |   |   |   | 3   |   |   | 3        |
|                    |                        |     |     | Medium  | 1   |  |   | 2   |   |   |   |   |   |   |   | 3   | 3   |   |   |   | 3   |   |   | 3        |
|                    |                        |     |     | High  | 1   |  |   | 2   |   |   |   |   |   |   |   | 3   | 3   |   |   |   |   |   |   | 3        |
| 414.0              | 220                    | 220 | -   | Low   | 1   |  |   | 1   |   |   |   |   |   | 2   | 2   |   |   |   |   |   | 2   |   |   |          |
|                    |                        |     |     | Medium  | 1   |  |   | 1   |   |   |   |   | 2   | 2   |   |   |   |   |   |   | 2   |   |   |          |
|                    |                        |     |     | High  | 1   |  |   | 1   |   |   |   |   | 2   | 2   |   |   |   |   |   |   |   |   |   |          |
| 439.0              | 125                    | 125 | 220 | Low   | 1   |  |   | 2   |   |   |   |   |   |   | 1   |   |   |   |   |   | 3   |   |   | 2        |
|                    |                        |     |     | Medium  | 1   |  |   | 2   |   |   |   |   | 1   | 2   | 2   | 2   |   |   |   |   | 3   |   |   | 2        |
|                    |                        |     |     | High  | 1   |  |   | 2   |   |   |   |   | 1   | 2   | 2   | 2   |   |   |   |   |   |   |   | 2        |
| 506.0              | 220                    | 320 | -   | Low   | 1   |  |   | 1   |   |   |   |   |   | 1   | 2   | 2   |   |   |   |   | 2   |   |   | 1        |
|                    |                        |     |     | Medium  | 1   |  |   | 1   |   |   |   | 1   | 1   |   | 3   |   |   |   |   |   | 2   |   |   | 1        |
|                    |                        |     |     | High  | 1   |  |   | 1   |   |   |   | 1   | 1   |   | 3   |   |   |   |   |   |   |   |   | 1        |
| 530.0              | 125                    | 220 | 220 | Low   |   | 1  |   | 2   |   |   |   |   |   | 2   | 2   |   |   |   |   |   | 3   |   |   | 1        |
|                    |                        |     |     | Medium  |   | 1  |   | 2   |   |   |   |   | 2   | 4   | 1   | 1   |   |   |   |   | 3   |   |   | 1        |
|                    |                        |     |     | High  |   | 1  |   | 2   |   |   |   |   | 2   | 4   | 1   | 1   |   |   |   |   | 3   |   |   | 1        |
| 598.0              | 320                    | 320 | -   | Low   | 1   |  |   | 1   |   |   |   |   |   |   |   |   |   |   |   |   | 2   |   |   |          |
|                    |                        |     |     | Medium  | 1   |  |   | 1   |   |   |   | 2   | 2   |   |   |   |   |   |   |   | 2   |   |   |          |
|                    |                        |     |     | High  | 1   |  |   | 1   |   |   |   | 2   | 2   |   |   |   |   |   |   |   |   |   |   |          |
| 621.0              | 220                    | 220 | 220 | Low   | 1   |  |   | 2   |   |   |   |   |   |   |   |   |   |   |   |   | 3   |   |   | 3        |
|                    |                        |     |     | Medium  | 1   |  |   | 2   |   |   |   |   |   |   | 9   |   |   |   |   |   | 3   |   |   | 3        |
|                    |                        |     |     | High  | 1   |  |   | 2   |   |   |   |   |   |   | 9   |   |   |   |   |   |   |   |   | 3        |
| 713.0              | 320                    | 220 | 220 | Low   | 1   |  |   | 2   |   |   |   |   |   |   |   |   |   |   |   |   | 3   |   |   | 2        |
|                    |                        |     |     | Medium  | 1   |  |   | 2   |   |   |   | 1   | 1   |   | 6   |   |   |   |   |   | 3   |   |   | 2        |
|                    |                        |     |     | High  | 1   |  |   | 2   |   |   |   | 1   | 1   |   | 6   |   |   |   |   |   |   |   |   | 2        |
| 805.0              | 320                    | 320 | 220 | Low   | 1   |  |   | 2   |   |   |   |   |   |   |   |   |   |   |   |   | 3   |   |   | 1        |
|                    |                        |     |     | Medium  | 1   |  |   | 2   |   |   |   | 2   | 2   |   | 3   |   |   |   |   |   | 3   |   |   | 1        |
|                    |                        |     |     | High  | 1   |  |   | 2   |   |   |   | 2   | 2   |   | 3   |   |   |   |   |   |   |   |   | 1        |
| 897.0              | 320                    | 320 | 320 | Low   | 1   |  |   | 2   |   |   |   |   |   |   |   |   |   |   |   |   | 3   |   |   |          |
|                    |                        |     |     | Medium  | 1   |  |   | 2   |   |   |   | 3   | 3   |   |   |   |   |   |   |   | 3   |   |   |          |
|                    |                        |     |     | High  | 1   |  |   | 2   |   |   |   | 3   | 3   |   |   |   |   |   |   |   |   |   |   |          |

# TP3 COND



## THREE PASS FLUE CONDENSING GENERATOR




### > STRENGTHS:

- **Steel, condensing heat generator with high water content**, designed to work in conjunction with **gas or oil jet burners**.
- **Boiler with three flue gas passes**, with return pipe from the bottom of the combustion chamber
- **Floating combustion chamber with wet bottom**, low volumetric heat load and **standard turbulators** on the last flue gas pass.
- **Front single-piece door** equipped with blind flange for securing the burner. All the parts in contact with the flue gases are coated with refractory material offering high resistance and thermal insulation. **Reversible opening (right and left)** and closing system and micro-metric adjustment on four points.
- **Double return fitting** for low and high temperature systems.
- **Contained front overall dimensions** to fit the generator through the accessways of thermal power plants.
- **High energy efficiency**
- **Maximum operating pressure 6 bar**
- **Heat transfer fluid circulation control system** inside the body to improve exchange and avoid thermal shock
- **"Satellite" control panel** available in thermostatic version



| MODEL                                  |                | 65                            | 100             | 150             | 230             | 370             | 500             | 650             |       |
|--|----------------|-------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------|
| ERP Class                              | (Class G - A+) | ENERGY LABELLING NOT RELEVANT |                 |                 |                 |                 |                 |                 |       |
| Heat input (kW)                        | Max            | 61.3                          | 94.3            | 141.5           | 217             | 349.1           | 471.7           | 613.2           |       |
|  | Min            | 18.4                          | 28.3            | 42.5            | 65.1            | 104.7           | 141.5           | 184             |       |
| Useful nominal power (80/60°C) (kW)    | Max            | 59.5                          | 91.5            | 137.3           | 210.5           | 338.6           | 457.5           | 594.8           |       |
|  | Min            | 18                            | 27.7            | 41.6            | 63.8            | 102.6           | 138.7           | 180.3           |       |
| Useful nominal power (50/30°C) (kW)    | Gas            | Max                           | 65              | 100             | 150             | 230             | 370             | 500             | 650   |
|  |                | Min                           | 19.7            | 30.3            | 45.4            | 69.7            | 112             | 151.4           | 196.8 |
|  | Oil            | Max                           | 62.9            | 96.7            | 145             | 222.4           | 357.8           | 483.5           | 628.5 |
|  |                | Min                           | 19.1            | 29.4            | 44.2            | 67.7            | 108.9           | 147.2           | 191.3 |
| Efficiency (50/30°C) (%)               | Gas            | Max                           | 106             | 106             | 106             | 106             | 106             | 106             | 106   |
|  |                | Min                           | 107             | 107             | 107             | 107             | 107             | 107             | 107   |
|  | Oil            | Max                           | 102.5           | 102.5           | 102.5           | 102.5           | 102.5           | 102.5           | 102.5 |
|  |                | Min                           | 104             | 104             | 104             | 104             | 104             | 104             | 104   |
| Efficiency 30%                         | Gas            | Max                           | 107.5           | 107.5           | 107.5           | 107.5           | 107.5           | 107.5           | 107.5 |
|  | Oil            | Min                           | 104.5           | 104.5           | 104.5           | 104.5           | 104.5           | 104.5           | 104.5 |
| Max operating pressure                 | bar            | 6                             | 6               | 6               | 6               | 6               | 6               | 6               |       |
| Pressure drop on flue gas side         | mbar           | 0.4                           | 0.65            | 1.7             | 1.7             | 2               | 3.5             | 4.2             |       |
| Protection rating                      |                | IPX0D                         |                 |                 |                 |                 |                 |                 |       |
| Electric power supply                  | V/Hz           | 230/50                        | 230/50          | 230/50          | 230/50          | 230/50          | 230/50          | 230/50          |       |
| Empty weight                           | Kg             | 377                           | 436             | 490             | 645             | 1035            | 1338            | 1451            |       |
| <b>CODE</b>                            |                | <b>ORGZ3AXA</b>               | <b>ORGZ4AXA</b> | <b>ORGZ5AXA</b> | <b>ORGZ8AXA</b> | <b>ORGZBAXA</b> | <b>ORGZDAXA</b> | <b>ORGZGAXA</b> |       |
| <b>THERMOSTATIC CONTROL PANEL CODE</b> |                | <b>OQ2K10XA</b>               |                 |                 |                 |                 |                 |                 |       |

## DIMENSIONS

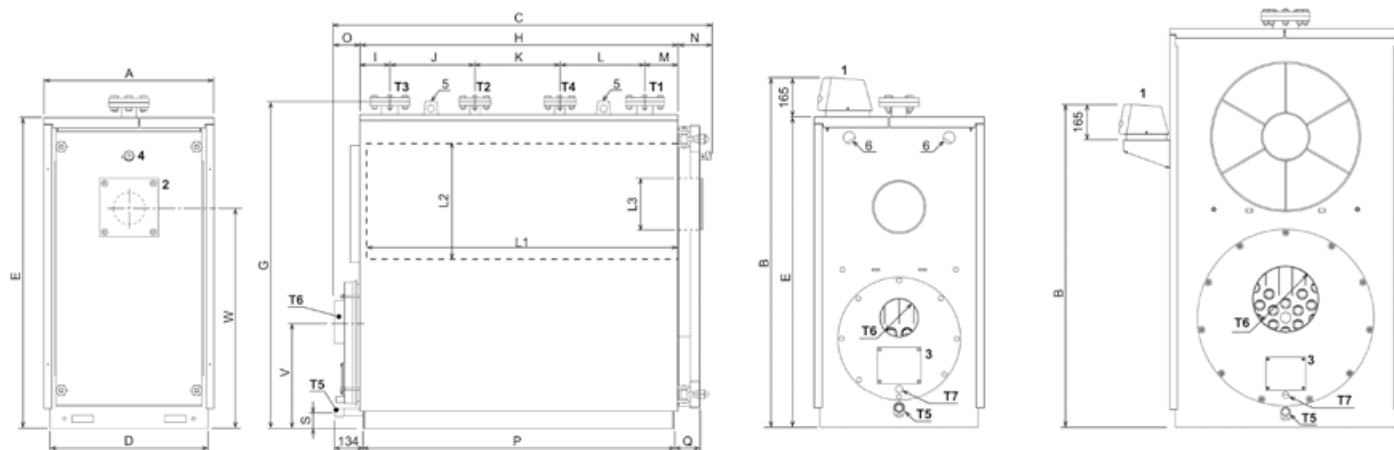

### > KEY

- T1 Heating delivery
- T2 High temperature return
- T3 Low temperature return
- T4 Safety fitting
- T5 Boiler discharge connection
- T6 Chimney connection
- T7 Condensate discharge connection
- 1 Tool panel
- 2 Burner connection flange
- 3 Flue gas chamber cleaning door
- 4 Flame control light

| MODEL                          |    | 65    | 100   | 150   | 230   | 370   | 500   | 650    |        |
|--------------------------------|----|-------|-------|-------|-------|-------|-------|--------|--------|
| Measurements                   | A  | mm    | 700   | 700   | 700   | 800   | 950   | 1050   | 1050   |
|                                | B  | mm    | 1437  | 1437  | 1437  | 1637  | 1462  | 1462   | 1462   |
|                                | C  | mm    | 1157  | 1377  | 1577  | 1777  | 1987  | 2187   | 2387   |
|                                | D  | mm    | 650   | 650   | 650   | 750   | 900   | 1000   | 1000   |
|                                | E  | mm    | 1275  | 1275  | 1275  | 1475  | 1655  | 1805   | 1805   |
|                                | G  | mm    | 1335  | 1335  | 1335  | 1535  | 1715  | 1860   | 1860   |
|                                | H  | mm    | 878   | 1098  | 1298  | 1498  | 1698  | 1900   | 2100   |
|                                | I  | mm    | 123   | 123   | 123   | 142   | 172   | 179    | 179    |
|                                | J  | mm    | 200   | 260   | 350   | 400   | 450   | 500    | 600    |
|                                | K  | mm    | 200   | 300   | 320   | 400   | 450   | 500    | 600    |
|                                | L  | mm    | 200   | 260   | 350   | 400   | 450   | 500    | 500    |
|                                | M  | mm    | 155   | 155   | 155   | 156   | 176   | 221    | 221    |
|                                | N  | mm    | 157   | 157   | 157   | 157   | 167   | 167    | 167    |
|                                | O  | mm    | 122   | 122   | 122   | 122   | 122   | 120    | 120    |
|                                | P  | mm    | 846   | 1066  | 1266  | 1467  | 1667  | 1867   | 2067   |
|                                | Q  | mm    | 134   | 134   | 134   | 134   | 144   | 144    | 144    |
| S                              | mm | 80    | 80    | 80    | 80    | 70    | 70    | 70     |        |
| V                              | mm | 450   | 443   | 435   | 500   | 550   | 587   | 580    |        |
| W                              | mm | 905   | 905   | 905   | 1055  | 1200  | 1315  | 1315   |        |
| System flow                    | T1 |       | DN 50 | DN 50 | DN 50 | DN 65 | DN 80 | DN 100 | DN 100 |
| High temperature system return | T2 |       | DN 40 | DN 40 | DN 40 | DN 40 | DN 50 | DN 65  | DN 65  |
| Low temperature system return  | T3 |       | DN 50 | DN 50 | DN 50 | DN 65 | DN 80 | DN 100 | DN 100 |
| Safety fitting                 | T4 |       | DN 40 | DN 40 | DN 40 | DN 40 | DN 50 | DN 65  | DN 65  |
| Boiler discharge               | T5 |       | 1"    | 1"    | 1"    | 1"    | 1"    | 1"     | 1"     |
| Flue gas outlet                | T6 | ØE mm | 160   | 160   | 160   | 200   | 250   | 300    | 300    |

# PREXTHERM RSW N STEEL HEAT GENERATOR FLAME INVERSION TYPE



- Pressurised heat generator designed for jet burner with liquid and/or gaseous fuel, with flame inversion fire-box in the combustion chamber
- Steel boiler body completely covered with insulating material and removable outer casing of grey painted sheet metal
- Large completely wet combustion chamber
- Front door with reversible opening (right and left) and innovative adjustment and closing system in a single mechanism
- System flow and return fittings threaded up to . 401, flanged from 525d
- Maximum operating pressure 6 bar
- Heat transfer fluid circulation control system inside the body to improve exchange and avoid thermal shock
- "Satellite" control panel designed to work with single-stage, two-stage and two-stage progressive burners.
- Delivered complete with connection flanges to the system, command control panel (to be ordered upon completion) and 'blind' burner plate (with holes on request).

**NB:** The sale and installation in EU countries of PREXTHERM RSW N generators (from mod. 92N to mod. 350N) can only take place in compliance with EU regulation No. 813/2013 (Art. 1, Paragraph 2, Point G)


OIL - GAS



| PREXTHERM RSW N                        |                 | 92N             | 107N            | 152N            | 190N            | 240N            | 300N            | 350N           |
|--|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------|
| Nominal power                          | min kW          | 60              | 70              | 100             | 137             | 160             | 196             | 228            |
|  | max kW          | 92              | 107             | 152             | 190             | 240             | 300             | 350            |
| Nominal capacity                       | min kW          | 64.3            | 75              | 107.3           | 147.4           | 170.9           | 209.5           | 242.5          |
|  | max kW          | 99.5            | 116             | 165             | 206             | 261             | 326             | 378            |
| Useful efficiency at Pn                | 100% Pn         | 92.48           | 92              | 92.3            | 91.95           | 92.25           | 92.05           | 92.51          |
|  | 30% Pn          | 93.95           | 93.65           | 94.5            | 93.46           | 94.24           | 94.12           | 95.5           |
| Total capacity of the boiler           | litres          | 120             | 120             | 185             | 185             | 235             | 300             | 365            |
| Pressure drop on water side            | mbar at ΔT 10°C | 8               | 11              | 20              | 12              | 17              | 40              | 48             |
|  | mbar at ΔT 20°C | 4               | 6               | 12              | 7               | 10              | 17              | 23             |
|  | mbar at ΔT 30°C | 2               | 2.5             | 5               | 3               | 4               | 9               | 13             |
| Pressure drop on flue gas side         | mbar            | 0.5             | 0.7             | 1.2             | 1.2             | 2.3             | 3.3             | 3.5            |
| Maximum operating pressure             | bar             | 6               | 6               | 6               | 6               | 6               | 6               | 6              |
| Dry weight                             | kg              | 260             | 260             | 350             | 350             | 440             | 480             | 590            |
| <b>CODE</b>                            |                 | <b>OQIJ3AXA</b> | <b>OQIJ4AXA</b> | <b>OQIJ6AXA</b> | <b>OQIJ7AXA</b> | <b>OQIJ8AXA</b> | <b>OQIJ9AXA</b> | <b>OQIJAXA</b> |
| <b>CODE THERMOSTATIC CONTROL PANEL</b> |                 | <b>OQ2K10XA</b> |                 |                 |                 |                 |                 |                |

| PREXTHERM RSW N                        |                 | 401N            | 525N            | 600N            | 720N            | 820N           | 940N           | 1060N          |
|--|-----------------|-----------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|
| Nominal power                          | min kW          | 260             | 341             | 390             | 468             | 533            | 611            | 667            |
|  | max kW          | 401             | 525             | 600             | 720             | 820            | 940            | 1000           |
| Nominal capacity                       | min kW          | 277.5           | 364.5           | 417             | 502             | 566            | 651            | 717            |
|  | max kW          | 434             | 567             | 648             | 777             | 881            | 1011           | 1075           |
| Useful efficiency at Pn                | 100% Pn         | 92.3            | 92.5            | 92.56           | 92.71           | 93.1           | 92.95          | 93.05          |
|  | 30% Pn          | 94.19           | 94.15           | 94.32           | 93.6            | 94.4           | 94.2           | 96.75          |
| Total capacity of the boiler           | litres          | 365             | 405             | 465             | 735             | 735            | 850            | 1250           |
| Pressure drop on water side            | mbar at ΔT 10°C | 43              | 40              | 51              | 32              | 40             | 51             | 65             |
|  | mbar at ΔT 20°C | 31              | 22              | 28              | 18              | 25             | 25             | 33             |
|  | mbar at ΔT 30°C | 16              | 12              | 16              | 10              | 18             | 16             | 20             |
| Pressure drop on flue gas side         | mbar            | 4.4             | 4.3             | 4.8             | 4.5             | 5.6            | 5.4            | 6              |
| Maximum operating pressure             | bar             | 6               | 6               | 6               | 6               | 6              | 6              | 6              |
| Dry weight                             | kg              | 590             | 860             | 970             | 1250            | 1250           | 1420           | 1580           |
| <b>CODE</b>                            |                 | <b>OQIJBAXA</b> | <b>OQIJEAXA</b> | <b>OQIJFAXA</b> | <b>OQIJHBXA</b> | <b>OQIJBXA</b> | <b>OQIJBXA</b> | <b>OQIJBXA</b> |
| <b>CODE THERMOSTATIC CONTROL PANEL</b> |                 | <b>OQ2K10XA</b> |                 |                 |                 |                |                |                |



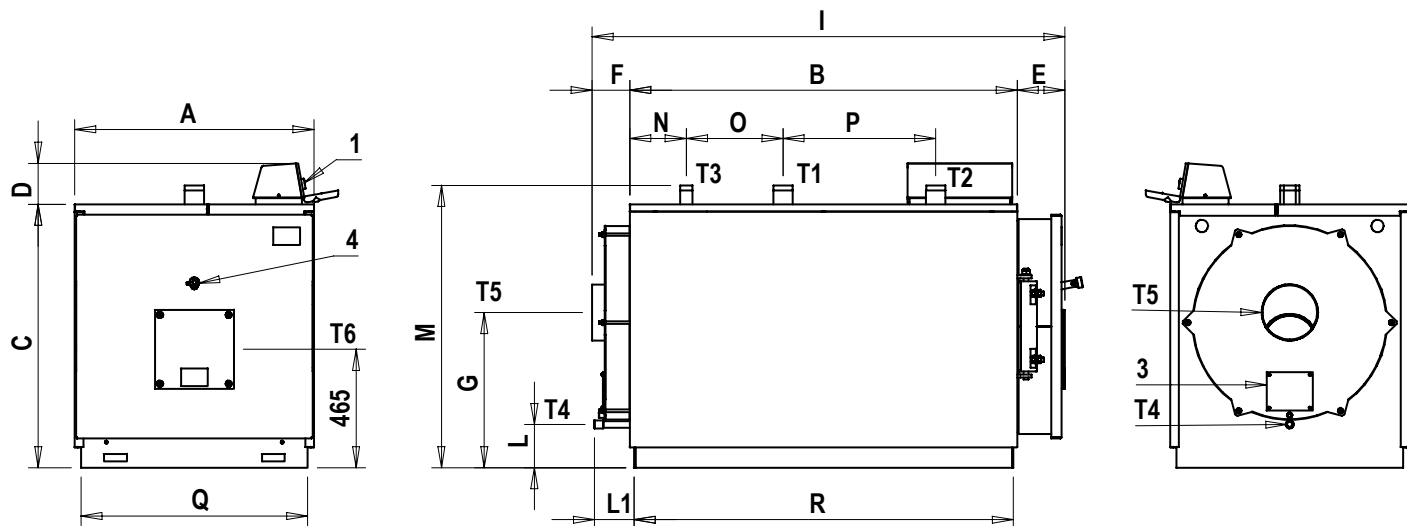

| MEASUREMENTS                |             | 92N    | 107N   | 152N   | 190N   | 240N   | 300N   | 350N   |
|-----------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|
| A                           | mm          | 800    | 800    | 800    | 800    | 800    | 940    | 940    |
| B                           | mm          | 772    | 772    | 1022   | 1022   | 1272   | 1272   | 1522   |
| C                           | mm          | 860    | 860    | 915    | 915    | 915    | 1035   | 1035   |
| D                           | mm          | 162    | 162    | 162    | 162    | 162    | 162    | 162    |
| E                           | mm          | 167    | 167    | 167    | 167    | 167    | 187    | 187    |
| F                           | mm          | 148    | 148    | 148    | 148    | 148    | 148    | 148    |
| G                           | mm          | 510    | 510    | 545    | 545    | 545    | 630    | 630    |
| H                           | mm          | 385    | 385    | 425    | 425    | 425    | 465    | 465    |
| I                           | mm          | 1087   | 1087   | 1337   | 1337   | 1587   | 1607   | 1857   |
| L                           | mm          | 160    | 160    | 165    | 165    | 165    | 185    | 185    |
| L1                          | mm          | 156    | 156    | 156    | 156    | 156    | 156    | 156    |
| M                           | mm          | 925    | 925    | 980    | 980    | 980    | 1100   | 1100   |
| N                           | mm          | 152    | 152    | 172    | 172    | 222    | 222    | 222    |
| O                           | mm          | 150    | 150    | 230    | 230    | 330    | 330    | 380    |
| P                           | mm          | 250    | 250    | 350    | 350    | 450    | 450    | 600    |
| Q                           | mm          | 750    | 750    | 750    | 750    | 750    | 890    | 890    |
| R                           | mm          | 740    | 740    | 990    | 990    | 1240   | 1240   | 1490   |
| Hot water inlet             | T1          | 2"     | 2"     | 2" 1/2 | 2" 1/2 | 2" 1/2 | 2" 1/2 | 2" 1/2 |
| Hot water return            | T2          | 2"     | 2"     | 2" 1/2 | 2" 1/2 | 2" 1/2 | 2" 1/2 | 2" 1/2 |
| Expansion vessel connection | T3          | 1 1/2" | 1 1/2" | 1 1/2" | 1 1/2" | 1 1/2" | 1 1/2" | 1 1/2" |
| Boiler discharge            | T4          | 3/4"   | 3/4"   | 3/4"   | 3/4"   | 3/4"   | 3/4"   | 3/4"   |
| Flue gas outlet             | T5 Ø and mm | 200    | 200    | 220    | 220    | 220    | 220    | 220    |

| MEASUREMENTS                |             | 401N   | 525N  | 600N  | 720N   | 820N   | 940N   | 1060N  |
|-----------------------------|-------------|--------|-------|-------|--------|--------|--------|--------|
| A                           | mm          | 940    | 1050  | 1050  | 1250   | 1250   | 1250   | 1430   |
| B                           | mm          | 1522   | 1534  | 1794  | 1784   | 1784   | 2024   | 2028   |
| C                           | mm          | 1035   | 1185  | 1185  | 1335   | 1335   | 1335   | 1515   |
| D                           | mm          | 162    | 162   | 162   | 162    | 162    | 162    | 162    |
| E                           | mm          | 187    | 182   | 182   | 212    | 212    | 212    | 240    |
| F                           | mm          | 148    | 143   | 143   | 219    | 219    | 219    | 214    |
| G                           | mm          | 630    | 725   | 725   | 830    | 830    | 830    | 900    |
| H                           | mm          | 455    | 518   | 518   | 565    | 565    | 565    | 670    |
| I                           | mm          | 1857   | 1859  | 2119  | 2215   | 2215   | 2455   | 2482   |
| L                           | mm          | 170    | 205   | 205   | 196    | 196    | 196    | 196    |
| L1                          | mm          | 156    | 155   | 155   | 227    | 227    | 227    | 227    |
| M                           | mm          | 1100   | 1250  | 1250  | 1400   | 1400   | 1400   | 1580   |
| N                           | mm          | 222    | 228   | 228   | 223    | 223    | 223    | 227    |
| O                           | mm          | 380    | 380   | 440   | 440    | 440    | 480    | 480    |
| P                           | mm          | 600    | 600   | 700   | 700    | 700    | 900    | 900    |
| Q                           | mm          | 890    | 1000  | 1000  | 1200   | 1200   | 1200   | 1380   |
| R                           | mm          | 1490   | 1492  | 1752  | 1752   | 1752   | 1992   | 1992   |
| Hot water inlet             | T1          | 2" 1/2 | DN 80 | DN 80 | DN 100 | DN 100 | DN 100 | DN 125 |
| Hot water return            | T2          | 2" 1/2 | DN 80 | DN 80 | DN 100 | DN 100 | DN 100 | DN 125 |
| Expansion vessel connection | T3          | 1 1/2" | 2"    | 2"    | 2 1/2  | 2 1/2  | 2 1/2  | 3      |
| Boiler discharge            | T4          | 3/4"   | 3/4"  | 3/4"  | 1      | 1      | 1      | 1      |
| Flue gas outlet             | T5 Ø and mm | 220    | 250   | 250   | 340    | 340    | 340    | 400    |

# PREXTHERM RSW


## PRESSURISED STEEL BOILER



QUADRA VERSION  
92 ÷ 1890



TONDA VERSION  
2360 ÷ 6000

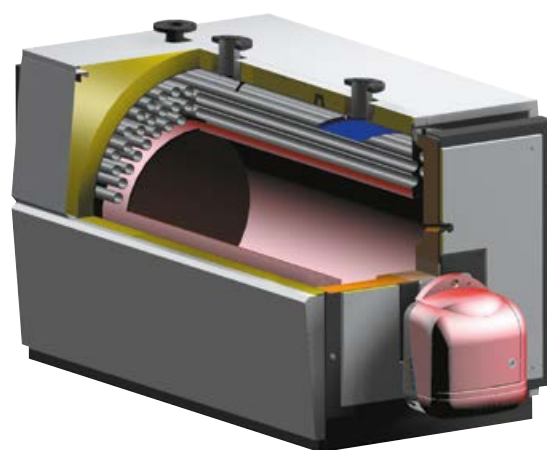

- Pressurised steel boiler, fit for installation of a jet burner, operating with gas or liquid fuel
- **Reverse flame** boiler body, fully insulated with a 80 mm thick layer of glass wool
- Front door with double layer of insulation and **reversible opening** (right and left) and door centering in a unique mechanism
- Carefully designed with a system optimising fluid circulation inside the boiler, thus improving thermal exchange and minimising stress on the materials
- **Max operating pressure: 6 bar**. Higher pressure specifications upon demand
- Models 92 N ÷ 401 N are available with a standard kit of connection flanges in the supply



\* FOR MODELS 92-350, IN EUROPEAN COMMUNITY CAN BE SOLD ONLY AS A REPLACEMENT OF AN IDENTICAL MODEL

| MODEL  | HEAT OUTPUT |        | HEAT INPUT |        | PRESSURE DROP<br>FLUE GAS SIDE | BODY EMPTY<br>WEIGHT | WIDTH | HEIGHT** | DEPTH | CODE     |
|--------|-------------|--------|------------|--------|--------------------------------|----------------------|-------|----------|-------|----------|
|        | min kW      | max kW | min kW     | max kW |                                |                      |       |          |       |          |
| 92 N   | 60          | 92     | 64,3       | 99,5   | 0,5                            | 260                  | 800   | 925      | 1087  | QQIJ3AXA |
| 107 N  | 70          | 107    | 75         | 116    | 0,7                            | 260                  | 800   | 925      | 1087  | QQIJ4AXA |
| 152 N  | 100         | 152    | 107,3      | 165    | 1,2                            | 350                  | 800   | 980      | 1337  | QQIJ6AXA |
| 190 N  | 137         | 190    | 147,4      | 206    | 1,2                            | 350                  | 800   | 980      | 1337  | QQIJ7AXA |
| 240 N  | 160         | 240    | 170,9      | 261    | 2,3                            | 440                  | 800   | 980      | 1587  | QQIJ8AXA |
| 300 N  | 196         | 300    | 209,5      | 326    | 3,3                            | 480                  | 940   | 1100     | 1607  | QQIJ9AXA |
| 350 N  | 228         | 350    | 277,5      | 378    | 3,5                            | 590                  | 940   | 1100     | 1857  | QQIJAAXA |
| 401 N  | 260         | 401    | 364,5      | 432    | 4,4                            | 590                  | 940   | 1100     | 1857  | QQIJBAXA |
| 525 N  | 341         | 525    | 417        | 567    | 4,3                            | 860                  | 1050  | 1250     | 1859  | QQIJEAXA |
| 600 N  | 390         | 600    | 495        | 648    | 4,8                            | 970                  | 1050  | 1250     | 2219  | QQIJFAXA |
| 720 N  | 468         | 720    | 502        | 777    | 4,5                            | 1250                 | 1250  | 1400     | 2219  | QQIJHAXA |
| 820 N  | 533         | 820    | 566        | 881    | 5,6                            | 1250                 | 1250  | 1400     | 2219  | QQIJBXA  |
| 940 N  | 611         | 940    | 651        | 1011   | 5,4                            | 1420                 | 1250  | 1400     | 2455  | QQIJBXA  |
| 1060 N | 689         | 1060   | 731        | 1140   | 6,0                            | 1580                 | 1430  | 1580     | 2482  | QQIJBXA  |
| 1250   | 813         | 1250   | 884        | 1359   | 6,5                            | 1953                 | 1450  | 1580     | 2420  | QQCJ00XA |
| 1480   | 962         | 1480   | 1046       | 1608   | 6,5                            | 2400                 | 1530  | 1730     | 2722  | QQCL00XA |
| 1600   | 1040        | 1600   | 1158       | 1736   | 6,8                            | 2500                 | 1530  | 1730     | 2722  | QQCN00XA |
| 1890   | 1229        | 1890   | 1336       | 2054   | 7,0                            | 2650                 | 1530  | 1730     | 2722  | QQCP00XA |
| 2360   | 1535        | 2360   | 1668       | 2565   | 7,2                            | 3550                 | 1610  | 1950     | 3232  | QQCS00XA |
| 3000   | 1950        | 3000   | 2113       | 3250   | 7,5                            | 4490                 | 1800  | 2140     | 3446  | QQCU00XA |
| 3600   | 2340        | 3600   | 2536       | 3900   | 8,2                            | 4900                 | 1800  | 2140     | 3816  | QQCV00XA |
| 4000   | 2600        | 4000   | 2819       | 4334   | 9,5                            | 6780                 | 1980  | 2325     | 4086  | QQCW00XA |
| 4500   | 2926        | 4500   | 3165       | 4868   | 10,5                           | 7380                 | 1980  | 2325     | 4436  | QQCX00XA |
| 5000   | 3251        | 5000   | 3515       | 5407   | 10,8                           | 9600                 | 2180  | 2525     | 4458  | QQCY00XA |
| 6000   | 3902        | 6000   | 4215       | 6483   | 12,0                           | 11500                | 2180  | 2525     | 4958  | QQCZ00XA |




\*\* Including water connections

# TP3 LN

## 3-PASS FLUES STEEL BOILER



- Monobloc generator, **3-pass flues, small thermal load**, vertical layout and extremely compact front dimensions. Homologated for systems until 100°C
- Ready for coupling with jet burners, operating with gas or oil and with low polluting emissions
- Large combustion chamber with **floating cooled back**
- Flues bundle for second and third flue-pass is situated in the top side of the combustion chamber. Flues tubes protrudes from the plate, in order to **avoid condensation**
- **Steel turbolators**, increasing thermal efficiency of the generator. They have been carefully designed not to worsen flues pressure drop
- **High efficiency**. Ranges between 94,7% and 96,3% on LCV ( $t_{avg}$  70°C)
- **Max operating pressure: 6 bars**. Higher pressure specifications upon demand
- Vertical connection are threaded until model 240 and flanged until model 600
- Completely insulated front door and **reversible opening** (right and left), thanks to an innovating mechanism on boiler body, with micrometric adjustment. Equipped with flame inspection hole and test point for combustion chamber back pressure

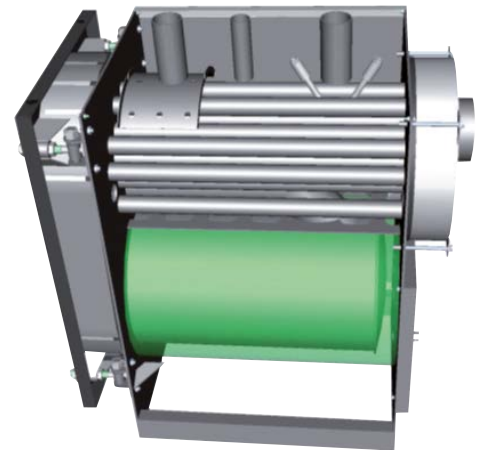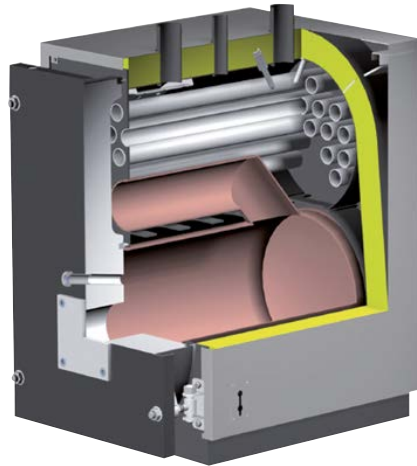

\* FOR MODELS 70-399, IN EUROPEAN COMMUNITY CAN BE SOLD ONLY AS A REPLACEMENT OF AN IDENTICAL MODEL

| MODEL | HEAT OUTPUT | HEAT INPUT | PRESSURE DROP<br>FLUE GAS SIDE | EMPTY<br>WEIGHT | WIDTH | HEIGHT | DEPTH | CODE         |
|-------|-------------|------------|--------------------------------|-----------------|-------|--------|-------|--------------|
|       | kW          | kW         | mbar                           | kg              | mm    | mm     | mm    | (see page 3) |
| 70    | 70          | 73,9       | 0,8                            | 236             | 670   | 1185   | 1130  | ORE099XA     |
| 92    | 92          | 97,1       | 1,4                            | 236             | 670   | 1185   | 1130  | ORE000XA     |
| 107   | 107         | 112,9      | 2,4                            | 332             | 670   | 1185   | 1555  | ORE100XA     |
| 152   | 152         | 160,5      | 3,6                            | 332             | 670   | 1185   | 1555  | ORE200XA     |
| 190   | 190         | 200,8      | 3,4                            | 460             | 760   | 1340   | 1570  | ORE300XA     |
| 240   | 240         | 252,9      | 6,1                            | 524             | 760   | 1340   | 1770  | ORE400XA     |
| 320   | 320         | 335,7      | 3,9                            | 833             | 820   | 1525   | 1990  | ORE600XA     |
| 399   | 399         | 417,4      | 6,2                            | 833             | 820   | 1525   | 1990  | ORE800XA     |
| 500   | 500         | 522,8      | 4,3                            | 1146            | 850   | 1615   | 2390  | OREB00XA     |
| 600   | 600         | 627,2      | 6,3                            | 1146            | 850   | 1615   | 2390  | ORED00XA     |


## THERMOSTATIC CONTROL BOARD FOR STEEL PRESSURISED GENERATORS



**NEW**

### > THE ADVANTAGES:

- Can be combined with single-stage and two-stage jet burners
- Double contact regulation thermostat
- Anticondensation function with minimum threshold for starting the adjustable pump
- Set-up for the installation of a temperature control

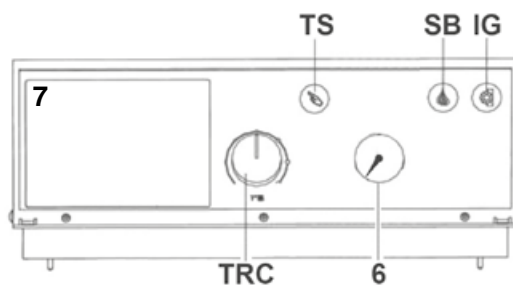

### > KEY

- IG** Main switch
- SB** Blocked burner light
- TRC** Adjustment thermostat
- TS** Safety Reset / Thermostat
- 6** Thermometer
- 7** Temperature control set-up (not supplied)

| CODE     | DESCRIPTION                |
|----------|----------------------------|
| 002K10XA | THERMOSTATIC CONTROL BOARD |

# ATLAS D ECO COND UNIT CONDENSING LOW NO<sub>x</sub> OIL BOILER

ERP







## > STRENGTHS:

- Boiler body in cast iron G20 and preassembled elements with steel double cones and tie rods
- High efficiency flue gas post condenser in stainless steel AISI 2205
- Completely wet combustion chamber
- Complete with single stage light oil burner with low pollutant emissions
- Control panel with large interface display and easy and intuitive parameter setting keys
- Including heating pump, expansion vessel, 3 bar pressure relief valve and water pressure switch
- Outer casing in painted steel by epoxy powder anaphoresis and kiln fired at 180°C
- Supplied in a single parcel packed in a wooden box complete with filter and oil line connection hoses

## > ADVANTAGES OF ATLAS D ECO COND UNIT:

- Sliding temperature operating mode with outdoor probe (optional)
- External domestic hot water storage tank managed by control electronics
- Can be combined with the remote control timer
- Antifrost system with triggering threshold at 6°C
- Easy access to stainless steel condenser for cleaning and inspection

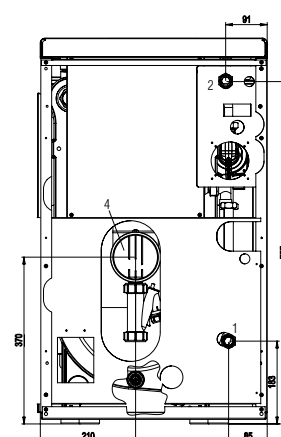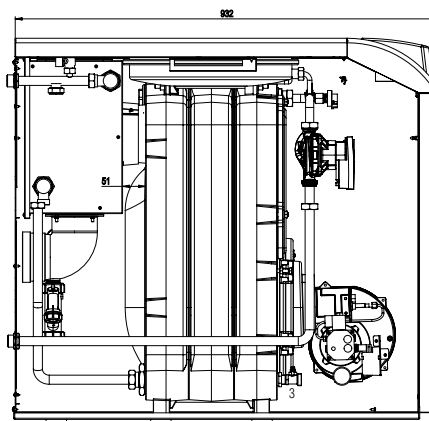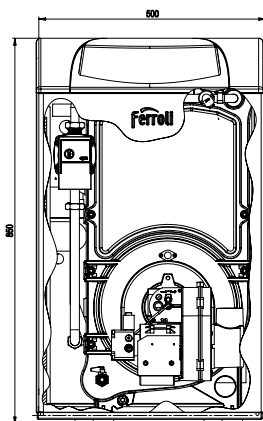

| MODEL                             |                | 34              |
|-----------------------------------|----------------|-----------------|
| ERP Class                         | (Class G - A+) | <b>A</b>        |
| Max heat input                    | kW             | 33.0            |
| Max heating heat output (80-60°C) | kW             | 32.0            |
| Max heating heat output (50-30°C) | kW             | 33.8            |
| Pmax efficiency (80-60°C)         | %              | 97.0            |
| Pmax efficiency (50-30°C)         | %              | 102.6           |
| Efficiency 30% Pn                 | %              | 103.5           |
| Max heating operating pressure    | bar            | 3               |
| Number of elements                | no.            | 3               |
| Empty weight                      | Kg             | 180             |
| <b>CODE</b>                       |                | <b>0JHW3YWA</b> |

## > KEY

- 1 system flow Ø 3/4"
- 2 system return Ø 3/4"
- 3 boiler body drain Ø 1/2"
- 4 flue gas outlet Ø 100 mm

## > ACCESSORIES

| CODE     | DESCRIPTION   |
|----------|---|
| 1KWMA11W | ADDITIONAL 2-METRE STORAGE TANK SENSOR                                  |
| 043005X0 | ADDITIONAL 5-METRE STORAGE TANK SENSOR                                  |
| 013017X0 | KIT FOR MANAGEMENT WITH THERMOSTAT (not supplied) OF A DHW STORAGE TANK |
| 013018X0 | OUTDOOR PROBE   |

NOTE1: FOR TEMPERATURE ADJUSTMENTS / PLATES / WATER TREATMENT / SLUDGE SEPARATOR SEE CHAPTER ON SYSTEM COMPONENTS

NOTE2: For the neutralisers, see chapter CONDENSING NEUTRALISERS

# ATLAS D ECO COND SI UNIT

## CONDENSING LOW NOx OIL BOILER INSTANT COMBI

ERP









### > STRENGTHS:

- **Boiler body** in cast iron G20 and preassembled elements with steel double cones and tie rods
- **High efficiency flue gas post condenser** in stainless steel AISI 2205 with integrated instantaneous domestic hot water production
- **Integrated domestic hot water circuit** in post condenser complete with flow switch. The system favours condensation even in the domestic hot water production phase, providing the generator with a high degree of efficiency
- Completely wet **combustion chamber**
- **Complete with single stage oil burner** with low pollutant emissions
- Control panel with large interface display and easy and intuitive parameter setting keys
- **Heating circuit** including pump, expansion vessel, 3 bar pressure relief valve and water pressure switch
- **Outer casing** in painted steel by epoxy powder anaphoresis and kiln fired at 180°C
- **Supplied** in a single parcel packed in a wooden box complete with filter and oil line connection hoses
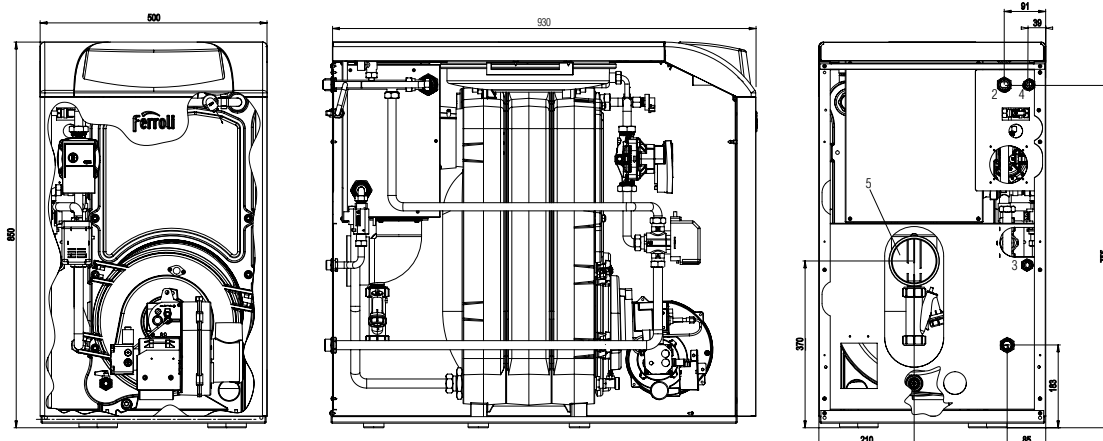
### > ADVANTAGES OF ATLAS D ECO COND SI UNIT:

- **Sliding temperature operating mode** with outdoor probe (optional)
- **Can be combined** with the remote control timer
- **Antifrost system** with triggering threshold at 6°C
- **Easy access** to stainless steel condenser for cleaning and inspection



| MODEL                                      |  |                              | 34  |
|--|--|------------------------------|---|
| ERP Class                                  |     | (Class G - A <sup>++</sup> ) |  |
|  |  XL | (Class G - A)                |  |
| Nominal heat input (LCV)                   | Max / Min heating  | kW                           | 33.0 / 16.3   |
| Heating heat output 80°C-60°C<br>50°C-30°C | Max / Min heating  | kW                           | 32.0 / 16.0   |
|  | Max / Min heating  | kW                           | 33.8 / 17.0   |
| Useful thermal efficiency                  | 80°C-60°C  | Pmax % / Pmin %              | 97.0 / 97.9   |
|  | 50°C-30°C  | Pmax % / Pmin %              | 102.6 / 103.9   |
|  | Reduced load 30%   | Pmax %                       | -   |
| Domestic hot water production              | Δt 30°C  | l/min                        | 15.8  |
| Operating pressure                         | Min / Max heating  | bar                          | 0.8 / 0.3   |
| Empty weight                               |  | kg                           | 180   |
| <b>CODE</b>                                |  |                              | <b>OLHW3YWA</b>   |

### > KEY

- 1 System flow Ø 3/4"
- 2 System return Ø 3/4"
- 3 DHW inlet Ø 1/2
- 4 DHW return Ø 1/2
- 5 Flue gas outlet Ø 100 mm

### > ACCESSORIES

| CODE     | DESCRIPTION   |
|----------|---------------|
| 013018X0 | OUTDOOR PROBE |

**NOTE1:** FOR TEMPERATURE ADJUSTMENTS / PLATES / WATER TREATMENT / SLUDGE SEPARATOR SEE CHAPTER ON SYSTEM COMPONENTS

**NOTE2:** For the neutralisers, see chapter CONDENSING NEUTRALISERS

**NOTE3:** The flue gas ducts must be made by the installer in stainless steel

# ATLAS D ECO COND K UNIT CONDENSING LOW NOx OIL BOILER STORAGE COMBI

ERP








## > STRENGTHS:

- **Boiler body** in cast iron G20 and preassembled elements with steel double cones and tie rods
- **130 l storage tank** in enamelled steel complete with protection anode
- **High efficiency flue gas post condenser** in stainless steel AISI 2205
- Completely wet cooled **combustion chamber**
- **Complete with single stage oil burner** with low pollutant emissions
- **Control panel** with large interface display and easy and intuitive parameter setting keys
- **Complete** with heating and DHW pumps, expansion vessels for heating (10 l) and DHW (3 l), 3 bar pressure relief valve and water pressure switch
- **Outer casing** in painted steel by epoxy powder anaphoresis and kiln fired at 180°C
- **Supplied** in a single parcel packed in a wooden box complete with filter and oil line connection hoses

## > ADVANTAGES OF ATLAS D ECO COND K UNIT:

- **Sliding flow temperature compensation** with outdoor probe (optional)
- **Can be combined** with the remote control timer
- **Antifrost system** with triggering threshold at 6°C
- **Easy access** to stainless steel condenser for cleaning and inspection

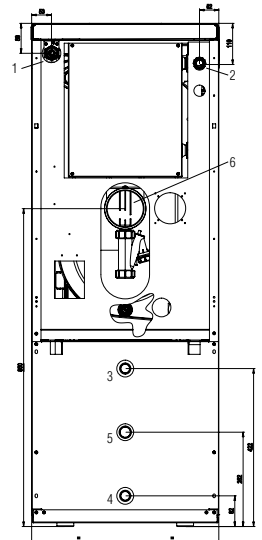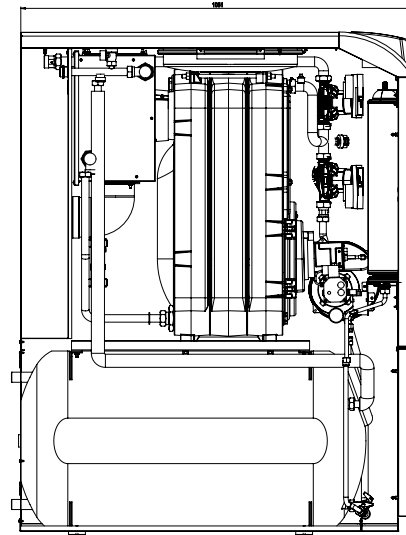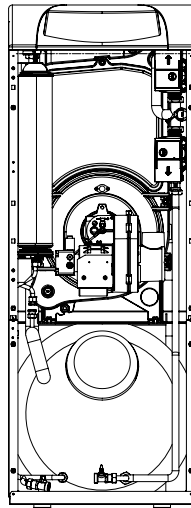

| MODEL                             |  | 34              |
|-----------------------------------|--|-----------------|
| ERP Class                         |  (Class G - A <sup>++</sup> ) | <b>A</b>        |
|                                   |  XXL (Class G - A)            | <b>B</b>        |
| Max heat input                    | kW   | 33.0            |
| Max heating heat output (80-60°C) | kW   | 32.0            |
| Max heating heat output (50-30°C) | kW   | 33.8            |
| Pmax efficiency (80-60°C)         | %  | 97.0            |
| Pmax efficiency (50-30°C)         | %  | 102.6           |
| Efficiency 30% Pn                 | %  | 103.5           |
| DHW storage volume                | l  | 130             |
| DHW flow rate Δt 30°C             | l/h  | 850             |
| DHW flow rate Δt 30°C             | l/10 min   | 250             |
| Max heating operating pressure    | bar  | 3               |
| Number of elements                | no.  | 3               |
| Empty weight                      | Kg   | 250             |
| <b>CODE</b>                       |  | <b>OLHX3YWA</b> |

## > KEY

- 1 system flow Ø 3/4"
- 2 system return Ø 3/4"
- 3 storage tank delivery Ø 1/2"
- 4 storage tank return Ø 1/2"
- 5 recirculation
- 6 flue gas outlet Ø 100 mm

## > ACCESSORIES

| CODE     | DESCRIPTION   |
|----------|---------------|
| 013018X0 | OUTDOOR PROBE |

**NOTE1:** FOR TEMPERATURE ADJUSTMENTS / PLATES / WATER TREATMENT / SLUDGE SEPARATOR SEE CHAPTER ON SYSTEM COMPONENTS

**NOTE2:** For the neutralisers, see chapter CONDENSING NEUTRALISERS

**NOTE3:** The flue gas ducts must be made by the installer in stainless steel


# ATLAS D CAST IRON FLOORING STANDING BOILERS, FOR OIL

ERP



## > STRENGTHS:

- **Heating device** designed to operate with jet burners with electric absorption  $\leq 180$  W for models 25-37 and  $\leq 200$  W for models 50-63-75 or for replacement with identical devices according to current regulations
- **Cast iron body**, with preassembled elements with steel double cones and tie rods, of the **three flue gas pass type** with completely wet combustion chamber
- **The standard electronics** can manage the heating system circulator, the remote timer control or room thermostat, the outdoor probe for flow temperature compensation, the circulator (3-way valve) and storage tank probe for DHW production with external storage
- **Key controls** and **LCD display interface**

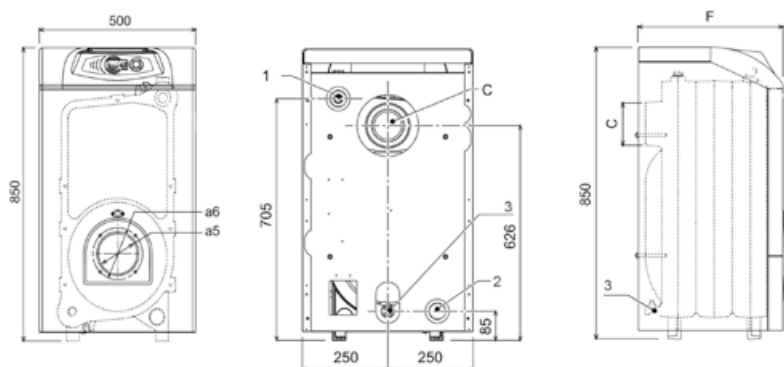

## > KEY

- 1 1" 1/2" system flow
  - 2 1" 1/2" system return
  - 3 Heating system drain valve
- a5 Burner hole  
a6 Burner connection  
C Flue gas outlet

| MODEL      | C<br>ø mm | F<br>mm | a5<br>ø mm | a6<br>ø mm |
|------------|-----------|---------|------------|------------|
| ATLAS D 25 | 120 - 130 | 400     | 115        | 150        |
| ATLAS D 37 | 120 - 130 | 500     | 115        | 150        |
| ATLAS D 50 | 120 - 130 | 600     | 115        | 150        |
| ATLAS D 63 | 120 - 130 | 700     | 115        | 150        |
| ATLAS D 75 | 120 - 130 | 800     | 115        | 150        |



| MODEL                          |                | 25              | 37              | 50              | 63              | 75              |
|--------------------------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| ERP Class*                     | (Class G - A+) | <b>B</b>        | <b>B</b>        | <b>B</b>        | <b>B</b>        | -               |
| Heat Input                     | kW             | 28.3            | 41.9            | 56.6            | 71.3            | 84.6            |
| Max heat output                | kW             | 25.0            | 37.0            | 50.0            | 63.0            | 75.0            |
| Pmax efficiency (80/60°C)      | %              | 88.2            | 88.3            | 88.4            | 88.4            | 88.7            |
| Efficiency 30% Pmax            | %              | 92.2            | 91.7            | 91.4            | 91.0            | 90.5            |
| Pressure drop on flue gas side | mbar           | 0.1             | 0.4             | 0.4             | 0.5             | 0.6             |
| Min/Max operating pressure     | bar            | 0.8 / 6         | 0.8 / 6         | 0.8 / 6         | 0.8 / 6         | 0.8 / 6         |
| Elements                       | No.            | 3               | 4               | 5               | 6               | 7               |
| Empty weight                   | Kg             | 127             | 166             | 205             | 244             | 283             |
| CODE                           |                | <b>OIHJ3PWA</b> | <b>OIHJ4PWA</b> | <b>OIHJ5PWA</b> | <b>OIHJ6PWA</b> | <b>OIHJ7PWA</b> |

\* The ErP class is certified if the boilers are combined with oil burners with electric absorption  $\leq 180$  W for models ATLAS D 25 - 37 and  $\leq 200$  W for models ATLAS D 50 - 63 - 75

## > ACCESSORIES

| CODE     | DESCRIPTION  |
|----------|--|
| 1KWMA11W | ADDITIONAL 2-METRE STORAGE TANK SENSOR   |
| 043005X0 | ADDITIONAL 5-METRE STORAGE TANK SENSOR   |
| 013017X0 | KIT FOR MANAGEMENT WITH THERMOSTAT (not supplied) OF A DHW STORAGE TANK (for heating only boilers) |
| 013018X0 | OUTDOOR PROBE  |

NOTE:  
FOR TEMPERATURE ADJUSTMENTS /  
PLATES / WATER TREATMENT /  
SLUDGE SEPARATOR SEE CHAPTER  
ON SYSTEM COMPONENTS



# ATLAS D ECO UNIT

ERP




## LOW NOx OIL BOILER HEATING ONLY


### > STRENGTHS:

- Floor-standing boiler for heating, complete with low pollutant emissions oil burner
- Cast iron body, with preassembled **three-pass** elements with completely wet combustion chamber
- The **standard electronics** can manage, in addition to the heating pump in the boiler: pump (or 3-way valve) and storage tank probe for DHW production with an external storage tank the remote control timer or room thermostat the outdoor probe for operation in sliding temperature
- **Key-operated controls** and interface with a large **LCD screen**
- **Standard supply including** pump and expansion vessel for heating system
- **Preassembled oil burner** supplied with filter and oil line connection hoses
- **Supplied in a single parcel** packed in a wooden box

MOD. 30 - 42

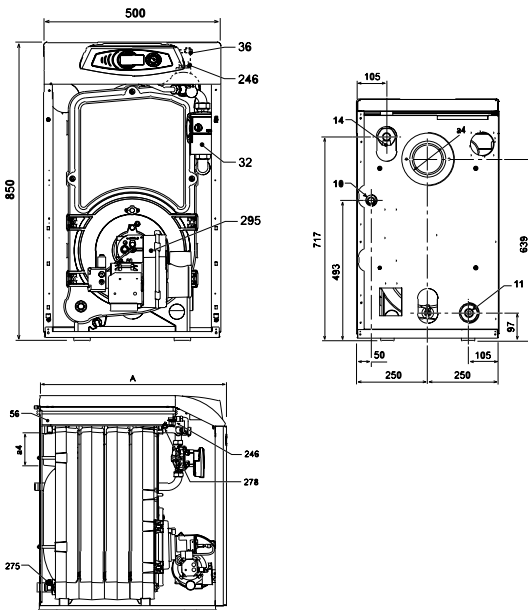

MOD. 56

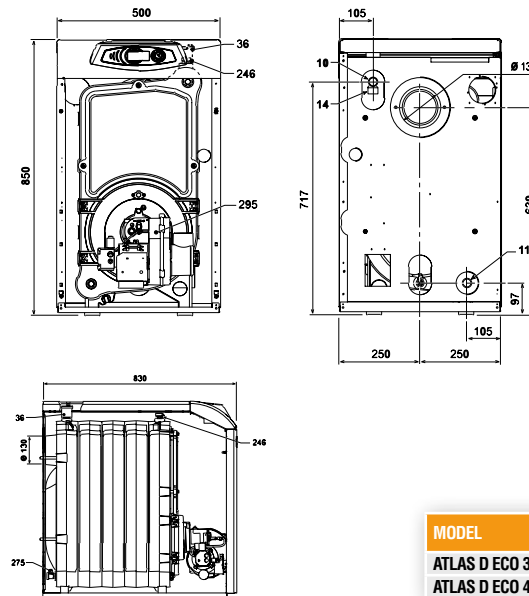

### > KEY

- 10 System delivery 3/4"
- 11 System return 1"
- 14 Safety valve
- 32 Heating circulating pump
- 36 Automatic air vent
- 56 Expansion tank
- 246 Pressure transducer
- 275 Heating system drain cock
- 278 Double sensor (Heating + Safety)
- 295 Burner

| MODEL               | A<br>ø mm | B<br>mm | a4<br>ø mm |
|---------------------|-----------|---------|------------|
| ATLAS D ECO 30 UNIT | 630       | 590     | 120 - 130  |
| ATLAS D ECO 42 UNIT | 730       | 690     | 120 - 130  |



| MODEL                          |                              | 30              | 42              | 56              |
|--------------------------------|------------------------------|-----------------|-----------------|-----------------|
| ERP Class                      | (Class G - A <sup>++</sup> ) | <b>B</b>        | <b>B</b>        | <b>B</b>        |
| Max heat input                 | kW                           | 26.6            | 39.4            | 53.2            |
| Max heating heat output        | kW                           | 25.0            | 37.0            | 50.0            |
| Pmax efficiency (80-60°C)      | %                            | 93.9            | 95.0            | 94.0            |
| Efficiency 30% Pn              | %                            | 98.2            | 97.4            | 97.3            |
| Max heating operating pressure | bar                          | 3               | 3               | 6               |
| Number of elements             | no.                          | 3               | 4               | 5               |
| Empty weight                   | Kg                           | 157             | 196             | 232             |
| <b>CODE</b>                    |                              | <b>OJHL3YWA</b> | <b>OJHL4YWA</b> | <b>OJHL5YWA</b> |

### > ACCESSORIES

| CODE     | DESCRIPTION   |
|----------|---|
| 1KWMA11W | ADDITIONAL 2-METRE STORAGE TANK SENSOR  |
| 043005X0 | ADDITIONAL 5-METRE STORAGE TANK SENSOR  |
| 013017X0 | KIT FOR MANAGEMENT WITH THERMOSTAT (not supplied)<br>OF A DHW STORAGE TANK (for heating only boilers) |
| 013018X0 | OUTDOOR PROBE   |

NOTE: FOR TEMPERATURE ADJUSTMENTS / PLATES / WATER TREATMENT / SLUDGE SEPARATOR SEE CHAPTER ON SYSTEM COMPONENTS




# ATLAS D ECO SI UNIT LOW NOx OIL BOILER INSTANT COMBI

ERP



## > STRENGTHS:

- Floor-standing boiler for heating and instantaneous domestic hot water production, complete with low pollutant emissions oil burner
- **Cast iron body**, with preassembled **three-pass** elements with completely wet combustion chamber
- **Standard supply:**  
Pump and expansion vessel for heating circuit  
Motorised three way valve and steel plate heat exchanger for instantaneous DHW production
- **The standard electronics** can manage:  
Remote control timer or room thermostat  
Outdoor probe for sliding temperature operating mode
- **Key-operated controls** and interface with a large **LCD screen**
- **Preassembled oil burner** supplied with filter and oil line connection hoses
- Supplied in a **single parcel** packed in a wooden box

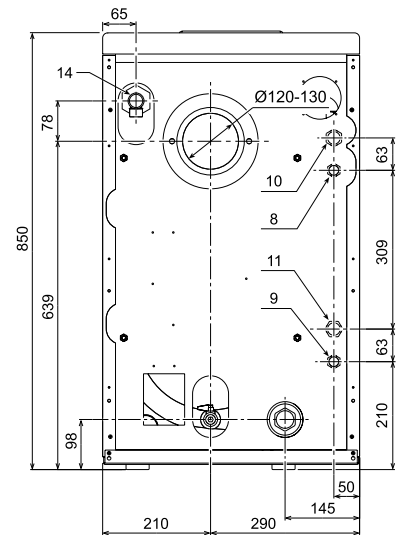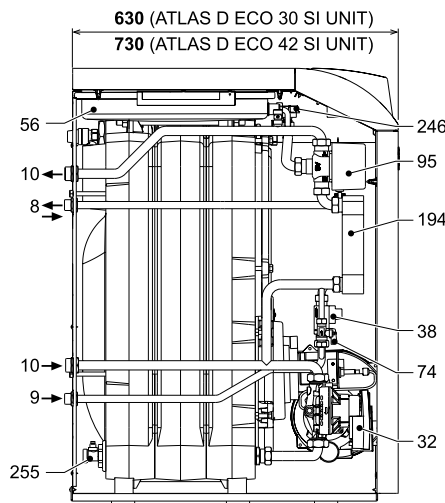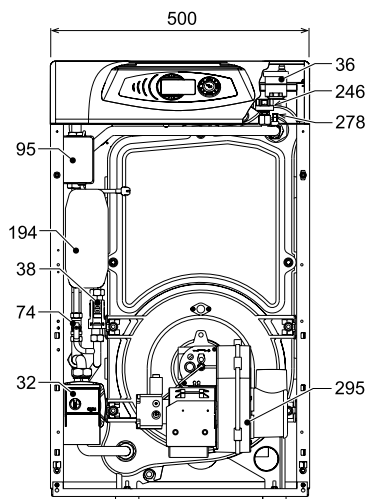

| MODEL                          |                             | 30              | 42              |
|--------------------------------|-----------------------------|-----------------|-----------------|
| ERP Class                      | (Class G - A <sup>+</sup> ) | <b>B</b>        | <b>B</b>        |
|                                | XL (Class G - A)            | <b>B</b>        | <b>B</b>        |
| Max heat input                 | kW                          | 26.6            | 39.4            |
| Max heating heat output        | kW                          | 25.0            | 37.0            |
| Pmax efficiency (80-60°C)      | %                           | 93.9            | 94.0            |
| Efficiency 30% Pn              | %                           | 98.2            | 97.4            |
| Max heating operating pressure | bar                         | 3               | 6               |
| DHW flow rate Δt30°C           | l/min                       | 14.3            | 21.2            |
| Number of elements             | no.                         | 3               | 4               |
| Empty weight                   | Kg                          | 160             | 200             |
| <b>CODE</b>                    |                             | <b>OLHC3YWA</b> | <b>OLHC4YWA</b> |

## > KEY

- |                             |                                      |
|-----------------------------|--------------------------------------|
| 10 System delivery          | 95 Diverter valve                    |
| 11 System return            | 194 DHW exchanger                    |
| 14 Safety valve             | 209 DHW outlet                       |
| 32 Heating circulating pump | 210 Cold water inlet                 |
| 36 Automatic air vent       | 246 Pressure transducer              |
| 38 Flow switch              | 255 System water drain               |
| 56 Expansion tank           | 278 Double sensor (Safety + heating) |
| 74 System filling cock      | 295 Burner                           |

## > ACCESSORIES

| CODE     | DESCRIPTION   |
|----------|---------------|
| 013018X0 | OUTDOOR PROBE |

**NOTE: FOR TEMPERATURE ADJUSTMENTS / PLATES / WATER TREATMENT / SLUDGE SEPARATOR SEE CHAPTER ON SYSTEM COMPONENTS**

# ATLAS D ECO K UNIT

Thermal unit with low NOx oil burner for heating and domestic hot water production

ERP








## > STRENGTHS:

- Floor-standing boiler for heating and domestic hot water production with storage tank complete with low pollutant emissions oil burner
- Cast iron body, with preassembled three-pass elements with completely wet combustion chamber
- Storage tank in steel and glass-porcelain complete with magnesium protection anode
- Standard supply:
  - Pump and expansion vessel for heating circuit, circulator for DHW circuit
- DHW expansion vessel and system filling valve supplied in optional kit
- The standard electronics can manage the remote control timer or room thermostat and the outdoor probe for sliding temperature operating mode
- Recirculation circuit connection
- Heating system and storage tank drain valves
- Key-operated controls and interface with a large LCD screen
- Preassembled oil burner supplied with filter and oil line connection hoses
- Supplied in a single parcel packed in a wooden box

## > KEY

- A Safety and non-return valve
- A4 Fume outlet
- 10 System delivery - Ø 3/4"
- 11 System return - Ø 1"
- 14 Heating safety valve
- 32 Heating circulating pump
- 36 Automatic air vent
- 40 DHW expansion vessel
- 56 Expansion vessel
- 74 System filling cock
- 97 Magnesium anode
- 130 Hot water tank circulating pump
- 143 Hot water tank control thermostat

- 154 Condensate drain pipe
- 178 Hot water tank thermometer bulb
- 179 Non-return valve
- 180 Hot water tank
- 192 Recirculation - Ø 3/4"
- 197 Manual air vent
- 209 Hot water tank delivery - Ø 3/4"
- 210 Hot water tank return - Ø 3/4"
- 233 Hot water tank drain cock
- 246 Pressure transducer
- 275 Heating system drain cock
- 278 Double sensor (Heating + Safety)
- 293 Hot water tank inspection flange
- 295 Burner

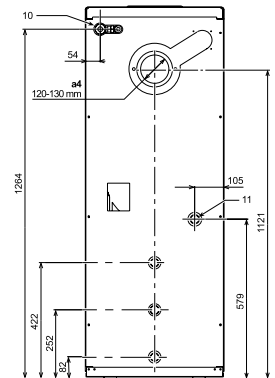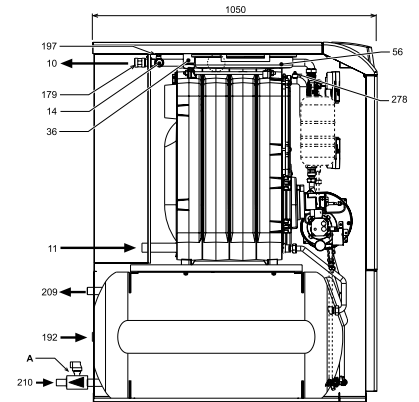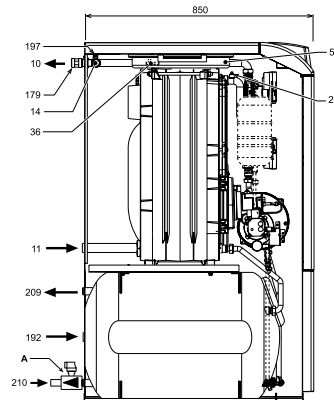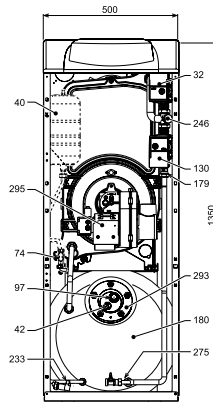

| MODEL                          |         |                             | 30 K 100        | 42 K 130        |
|--------------------------------|---------|-----------------------------|-----------------|-----------------|
| ERP Class                      |         | (Class G - A <sup>+</sup> ) | <b>B</b>        | <b>B</b>        |
|                                |         | (Class G - A)               | <b>B</b>        | <b>B</b>        |
| Max heat input                 |         | kW                          | 26.6            | 39.4            |
| Max heating heat output        |         | kW                          | 25.0            | 37.0            |
| Pmax efficiency (80-60°C)      |         | %                           | 93.9            | 94.0            |
| Efficiency 30% Pn              |         | %                           | 98.2            | 97.4            |
| Max operating pressure heating |         | bar                         | 6               | 6               |
| DHW storage volume             |         | l                           | 90              | 117             |
| DHW flow rate                  | Δt 30°C | l/h                         | 750             | 850             |
|                                | Δt 30°C | l/10 min                    | 195             | 250             |
| Number of elements             |         | no.                         | 3               | 3               |
| Empty weight                   |         | Kg                          | 225             | 265             |
| <b>CODE</b>                    |         |                             | <b>OLHU3YWA</b> | <b>OLHU4YWA</b> |

\* GENERATOR SUPPLIED AS PER STANDARD WITHOUT FILLING VALVE AND DHW EXPANSION VESSEL (available with optional kit)

## > ACCESSORIES


| CODE     | DESCRIPTION                      |
|----------|----------------------------------|
| 013018X0 | OUTDOOR PROBE                    |
| 032007X0 | DHW VESSEL KIT AND FILLING VALVE |

NOTE: FOR TEMPERATURE ADJUSTMENTS / PLATES / WATER TREATMENT / SLUDGE SEPARATOR SEE CHAPTER ON SYSTEM COMPONENTS

## 3 PASS-FLUES BOILER, FOR OIL OR GAS JET BURNER, HEATING ONLY



- High efficiency cast iron boiler body, featuring **3 pass** technology, insulated with high density rockwool
- **Silent** operation thanks to low flues turbulence
- Widely copes with requirements for **2 stars** efficiency according to directive 92/42 EEC, emended by Reg. 812/2013
- **Conic chimney stack**, in order to easily adapt to different tolerances of flue pipes diameters
- **Analogue** control panel with elegant fume cover
- Control board includes thermometer, ignition switch, safety thermostat with manual reset and temperature setting knob
- Stylish steel jacket painted by anaphoresis with epoxy powder

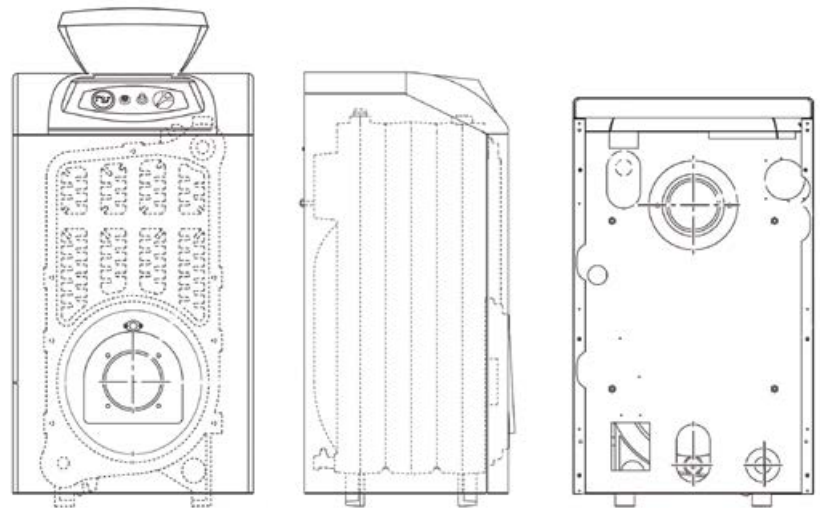

| MODEL                      |             |        | 32              | 47              | 62              | 78              | 95              |
|----------------------------|-------------|--------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Heat input                 | Max Heating | kW     | 34,9            | 51,6            | 67,7            | 85,6            | 103,2           |
| Heat output                | Max Heating | kW     | 32,0            | 47,0            | 62,0            | 78,0            | 95,0            |
| Efficiency                 | 80°C - 60°C | Pmax % | 91,7            | 91,1            | 91,5            | 91,1            | 92,0            |
|                            | 30% load    | %      | 94,3            | 93,5            | 94,0            | 93,5            | 93,8            |
| Number of element          |             | no.    | 3               | 4               | 5               | 6               | 7               |
| Heating water content      |             | litres | 18              | 23              | 28              | 33              | 38              |
| Heating operating pressure | Max         | bar    | 6               | 6               | 6               | 6               | 6               |
| Flues pressure drop        |             | mbar   | 0,2             | 0,27            | 0,4             | 0,4             | 0,63            |
| Empty weight               |             | kg     | 127             | 166             | 205             | 244             | 283             |
| Dimensions                 | WxHxD       | mm     | 500x850x400     | 500x850x500     | 500x850x600     | 500x850x700     | 500x850x800     |
| <b>CODE</b>                |             |        | <b>0IHJ3AWA</b> | <b>0IHJ4AWA</b> | <b>0IHJ5AWA</b> | <b>0IHJ6AWA</b> | <b>0IHJ7AWA</b> |




# GN2 N

## CAST-IRON BOILER, SUITABLE FOR INSTALLATION OF AN OIL OR GAS JET BURNER



### > STRENGTHS:

- High efficiency floor-standing heat generator fitted for jet burners on liquid and/or gas fuel, with **partial flame reversal** and one flue pass, cooled combustion chamber, for the production of hot water for central heating
- G20 cast-iron boiler body made from pre-assembled elements (6÷14) with steel cone inserts and boiler studs, insulated by a layer of rock wool lined by special tear-proof material.
- Control board includes: temperature and pressure gauge, overheat cut-off thermostat, switch on/off test, presetting led for the burner lockout, 2 stages regulation thermostat, lodging for an electronic controller
- Supplied in **three boxes**:
  - 1) boiler body in a wooden crate
  - 2) jacket packaged in a cardboard box
  - 3) instrument panel packaged in a cardboard box
- **Fitted for two-stage burners**

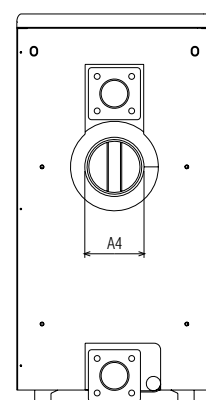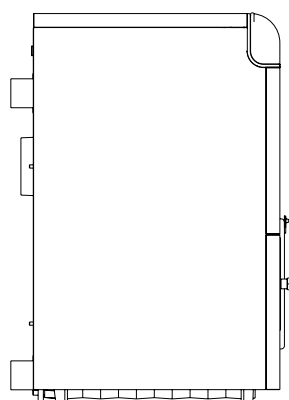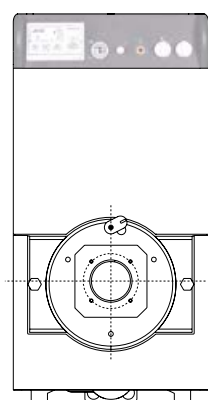

| MODEL                      |                    |                 | GN 2 N 06       | GN 2 N 07       | GN 2 N 08       | GN 2 N 09       | GN 2 N 10       | GN 2 N 11       | GN 2 N 12       | GN 2 N 13       | GN 2 N 14       |
|----------------------------|--------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Heat input                 | Max                | kW              | 116.0           | 136.9           | 156.5           | 176.0           | 195.6           | 215.2           | 234.7           | 254.3           | 273.9           |
|                            | Min                | kW              | 95.0            | 110.0           | 125.0           | 140.0           | 155.0           | 170.0           | 185.0           | 200.0           | 215.0           |
| Heat output                | Max                | kW              | 107.0           | 126.0           | 144.0           | 162.0           | 180.0           | 198.0           | 216.0           | 234.0           | 252.0           |
|                            | Min                | kW              | 87.0            | 101.0           | 115.0           | 129.0           | 143.0           | 157.0           | 171.0           | 185.0           | 199.0           |
| Number of elements         | no.                |                 | 6               | 7               | 8               | 9               | 10              | 11              | 12              | 13              | 14              |
| Water content              | dm <sup>3</sup>    |                 | 57              | 65              | 73              | 81              | 89              | 97              | 105             | 113             | 121             |
| Combustion chamber         | volume             | dm <sup>3</sup> | 77.0            | 91.0            | 104.0           | 118.0           | 132.0           | 146.0           | 160.0           | 174.0           | 187.0           |
| Heating operating pressure | Max                | bar             | 6               | 6               | 6               | 6               | 6               | 6               | 6               | 6               | 6               |
| Pressure drop:             |                    | Δp mbar         | 0.4             | 0.4             | 0.4             | 0.4             | 0.4             | 0.4             | 0.4             | 0.4             | 0.4             |
|                            | combustion chamber | ΔT 20°C         | -               | 0.5             | 0.8             | 1.8             | 2.2             | 2.6             | 3.2             | 4.0             | 4.5             |
| Boiler body weight         |                    | kg              | 361             | 412             | 463             | 514             | 565             | 616             | 670             | 725             | 780             |
| Dimensions                 | A4                 | mm              | 180             |                 |                 |                 | 200             |                 |                 |                 |                 |
|                            | WxHxD              | mm              | 600x1196x757    | 600x1196x867    | 600x1196x977    | 600x1196x1087   | 600x1196x1197   | 600x1196x1307   | 600x1196x1417   | 600x1196x1527   | 600x1196x1637   |
| CODE                       |                    |                 | <b>017J6BWA</b> | <b>017J7BWA</b> | <b>017J8BWA</b> | <b>017J9BWA</b> | <b>017JABWA</b> | <b>017JBBWA</b> | <b>017JCBWA</b> | <b>017JDBWA</b> | <b>017JEBWA</b> |




# GN4 N

## CAST-IRON 3 PASS-FLUES BOILER, SUITABLE FOR INSTALLATION OF AN OIL OR GAS JET BURNER



### > STRENGTHS:

- High efficiency heat generator for liquid or gas fuel, **three flue passes**, cooled combustion chamber, for the production of hot water for central heating, suitable for operation either connected to a **traditional system** or connected to a **low temperature heating system**, with a minimum return temperature of 35°C
- G20 cast-iron boiler body made of sections to be assembled when installing the generator in the boiler room
- **Fitted for two-stage burners**
- Control board includes: thermometer, safety thermostat, 2 stages thermostat with presetting for indication leds, boiler switch, lodging for eventual flues thermostat and electronic controller



SPECIFIC OPTION: 037000X0 section assembling tool for cast iron boilers

\*





\* FOR GN4 N 07÷10, IN EUROPEAN COMMUNITY CAN BE SOLD ONLY AS A REPLACEMENT OF AN IDENTICAL MODEL

| MODEL                                       |        |                 | GN 4 N 07       | GN 4 N 08       | GN 4 N 09       | GN 4 N 10       | GN 4 N 11       | GN 4 N 12       | GN 4 N 13       | GN 4 N 14       |
|---|--------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Heat input                                  | Max    | kW              | 217             | 270             | 324             | 388             | 452             | 516             | 600             | 695             |
|   | Min    | kW              | 128             | 170             | 192             | 229             | 266             | 309             | 352             | 416             |
| Heat output                                 | Max    | kW              | 200             | 250             | 300             | 360             | 420             | 480             | 560             | 650             |
|   | Min    | kW              | 120             | 150             | 180             | 215             | 250             | 290             | 330             | 390             |
| Efficiency                                  | 30%    | Pmax %          | 92.2            | 92.9            | 92.6            | 92.8            | 92.9            | 93.0            | 93.3            | 93.5            |
|   |        | %               | 95.4            | 96.0            | 96.5            | 97.1            | 97.1            | 97.2            | 97.3            | 97.3            |
| Number of elements                          |        | no.             | 7               | 8               | 9               | 10              | 11              | 12              | 13              | 14              |
| Water content                               |        | dm <sup>3</sup> | 143             | 163             | 183             | 203             | 223             | 243             | 263             | 283             |
| Combustion chamber                          | volume | dm <sup>3</sup> | 161.3           | 185.1           | 208.9           | 232.8           | 256.6           | 280.4           | 304.3           | 328.1           |
| Heating operating pressure                  | Max    | bar             | 6               | 6               | 6               | 6               | 6               | 6               | 6               | 6               |
| Pressure drop: combustion chamber hydraulic |        | Δp mbar         | 0.5             | 0.8             | 0.7             | 1.0             | 1.4             | 1.7             | 2.6             | 3.5             |
|   |        | ΔT 20°C         | 20              | 30              | 42              | 54              | 65              | 77              | 88              | 100             |
| Boiler body weight                          |        | kg              | 940             | 1050            | 1170            | 1270            | 1400            | 1510            | 1630            | 1740            |
| Dimensions                                  | WxHxD  | mm              | 850x1193x1040   | 850x1193x1170   | 850x1193x1300   | 850x1193x1430   | 850x1193x1560   | 850x1193x1690   | 850x1193x1820   | 850x1193x1950   |
| CODE  |        |                 | <b>019J7CWA</b> | <b>019J8CWA</b> | <b>019J9CWA</b> | <b>019JACWA</b> | <b>019JBCWA</b> | <b>019JCCWA</b> | <b>019JDCWA</b> | <b>019JECWA</b> |

# PEGASUS 23 - 32 - 45 CAST IRON ATMOSPHERIC GAS BOILER, HEATING ONLY



- Boiler body made of assembled **G 20 cast iron sections**, generously insulated by a rockwool layer externally lined with tearproof material
- Atmospheric burner in stainless steel with electronic ignition and ionization control
- **Analogue control panel** protected with a flip cover
- Control board includes temperature and pressure gauge, ignition switch, safety thermostat with manual reset and temperature setting knob
- **Oversize 1" ½ F system flow and return connections**
- Steel casing painted white by anaphoresis using epoxy powder paint
- Boiler is supplied packed inside a robust wooden crate

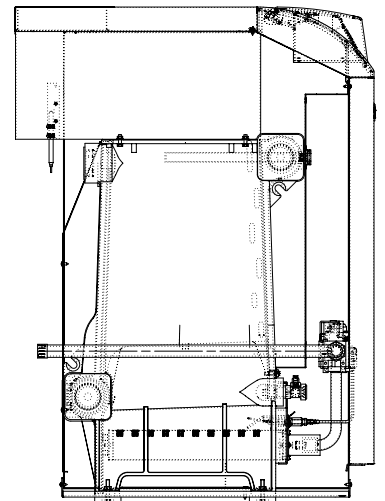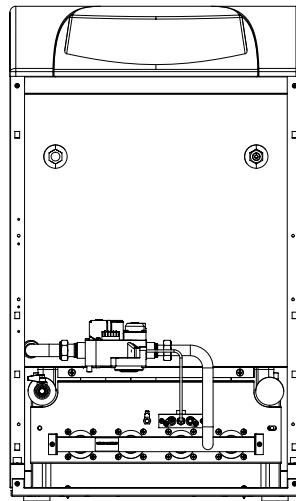


| MODEL                      |                    |        | 23              | 32              | 45              |
|----------------------------|--------------------|--------|-----------------|-----------------|-----------------|
| Heat input                 | Max Heating        | kW     | 25.3            | 34.9            | 49.5            |
|                            | Min                | kW     | 10.1            | 14.9            | 19.7            |
| Heat output                | Max Heating        | kW     | 23.0            | 32.0            | 45.0            |
|                            | Min                | kW     | 8.8             | 13.0            | 17.2            |
| Efficiency                 | 80°C - 60°C<br>30% | Pmax % | 90.9            | 91.7            | 90.9            |
|                            |                    | %      | 91.3            | 91.5            | 91.6            |
| Number of elements         |                    | no.    | 3               | 4               | 5               |
| Heating water content      |                    | litres | 9.1             | 11.6            | 14.1            |
| Heating operating pressure | Max                | bar    | 6               | 6               | 6               |
| Empty weight               |                    | kg     | 106             | 136             | 164             |
| Dimensions                 | WxHxD              | mm     | 400x850x615     | 500x850x615     | 500x850x615     |
| <b>CODE</b>                |                    |        | <b>0E4L3MWA</b> | <b>0E4L4MWA</b> | <b>0E4L5MWA</b> |

# PEGASUS T

## CAST IRON ATMOSPHERIC GAS BOILER, HEATING ONLY, PILOT IGNITION



- Boiler body made of assembled **G 20 cast iron sections**, generously insulated by a rockwool layer externally lined with tearproof material
- Atmospheric burner in stainless steel with **pilot ignition and thermocouple**
- **Analogue control panel** protected with a flip cover
- Control board includes thermometer, pressure gauge, ignition switch, safety thermostat with manual reset and temperature setting knob
- **Oversize 1" ½ F system flow and return connections**
- Steel casing painted white by anaphoresis using epoxy powder paint
- Easy access to combustion assembly and stack, simply removing casing (fixed with quick pressure clips) and respective insulation
- Boiler is supplied packed inside a robust wooden crate

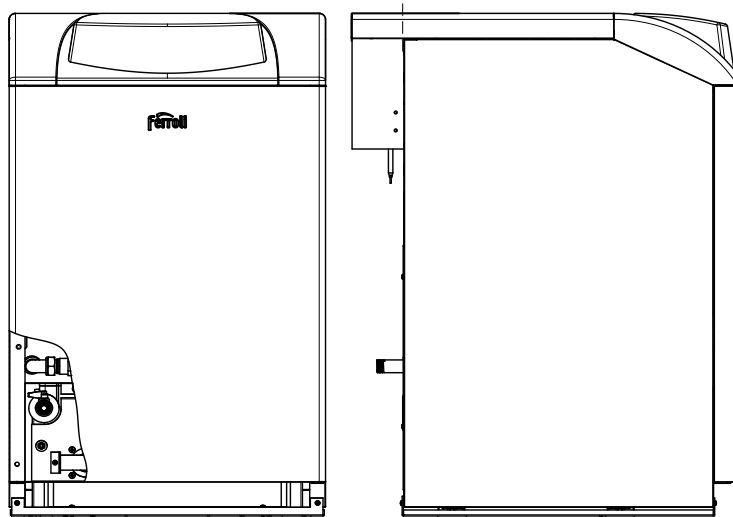

| MODEL                      |                    |        | 23              | 35              | 45              |
|----------------------------|--------------------|--------|-----------------|-----------------|-----------------|
| Heat input                 | Max Heating        | kW     | 25,3            | 38,8            | 49,5            |
|                            | Min                | kW     | 10,1            | 14,9            | 19,7            |
| Heat output                | Max Heating        | kW     | 23,0            | 35,0            | 45,0            |
|                            | Min                | kW     | 8,8             | 13,0            | 17,2            |
| Efficiency                 | 80°C - 60°C<br>30% | Pmax % | 90,9            | 90,9            | 90,9            |
|                            |                    | %      | 91,3            | 91,5            | 91,6            |
| Number of elements         |                    | no.    | 3               | 4               | 5               |
| Heating water content      |                    | litres | 9,1             | 11,6            | 14,1            |
| Heating operating pressure | Max                | bar    | 6               | 6               | 6               |
| Empty weight               |                    | kg     | 106             | 136             | 164             |
| Dimensions                 | WxHxD              | mm     | 400x850x615     | 500x850x615     | 500x850x615     |
| CODE                       |                    |        | <b>0E4K3MWA</b> | <b>0E4K4RWA</b> | <b>0E4K5MWA</b> |





# PEGASUS D 23 - 32 - 45 CAST IRON ATMOSPHERIC GAS BOILER, HEATING ONLY




- Stainless steel atmospheric burner and gas valve with adjustable output according to the installation's requirement
- Management of optional external storage cylinder, with legionella protection
- System **flow temperature compensation** (with installation of optional outdoor probe)
- Wide backlit **LCD** interface with button control
- Can be connected with **remote control** (optional)
- **Frost protection** system
- Available as optional pump and expansion vessel kit

## MOD. D32 - D45

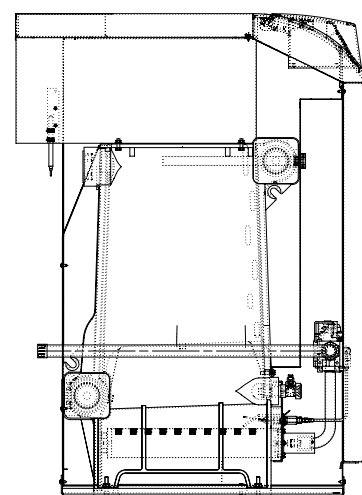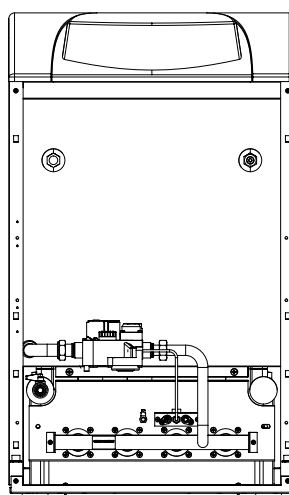

### SPECIFIC ACCESSORIES

|   |       | CODE     |
|---|-------|----------|
| Kit including: pump, 14 lts. CH expansion vessel, 1/2" F-F 3 bar safety valve |       | 022002X0 |
| Probe for DHW tank  | 2 mts | KWMA11W  |
|   | 5 mts | 043005X0 |
| Kit for handling DHW storage by means of a (not supplied) thermostat          |       | 013017X0 |



| MODEL                      |                    |        | 23              | 32              | 45              |
|----------------------------|--------------------|--------|-----------------|-----------------|-----------------|
| Heat input                 | Max Heating        | kW     | 25,3            | 34,9            | 49,5            |
|                            | Min                | kW     | 10,1            | 14,9            | 19,7            |
| Heat output                | Max Heating        | kW     | 23,0            | 32,0            | 45,0            |
|                            | Min                | kW     | 8,8             | 13,0            | 17,2            |
| Efficiency                 | 80°C - 60°C<br>30% | Pmax % | 90,9            | 91,7            | 90,9            |
|                            |                    | %      | 91,3            | 91,5            | 91,6            |
| Number of elements         |                    | no.    | 3               | 4               | 5               |
| Heating water content      |                    | litres | 9,1             | 11,6            | 14,1            |
| Heating operating pressure | Max                | bar    | 6               | 6               | 6               |
| Empty weight               |                    | kg     | 106             | 136             | 164             |
| Dimensions                 | WxHxD              | mm     | 400x850x615     | 500x850x615     | 500x850x615     |
| <b>CODE</b>                |                    |        | <b>0E4L3AWA</b> | <b>0E4L4AWA</b> | <b>0E4L5AWA</b> |



# PEGASUS D K 130

## CAST IRON ATMOSPHERIC GAS BOILER, INCLUDING DOMESTIC HOT WATER ENAMELLED STORAGE TANK



- **3 stars** efficiency according to 92/42 EEC emended by Reg. 812/2013 for 30 and 40 models
- **130 ltrs** enamelled steel hot water **storage**
- Digital control panel suitable for connection to opentherm **modulating remote control** and **outdoor probe** (optionals)
- Evolved **digital** interface for planning and monitoring of CH-DHW temperatures and advanced features (economy, legionella protection, troubleshooting ect)
- Stainless steel AISI 304 atmospheric gas burner
- Gas valve with adjustable output according to the installation's requirement, thus allowing unchanged combustion quality and excellent performances
- DHW expansion vessel and filling valve are not supplied
- Central Heating **frost protection** system
- DHW storage tanks are equipped with connection for a recirculation loop, for immediate availability of hot water to the user

MOD. D45 K 130

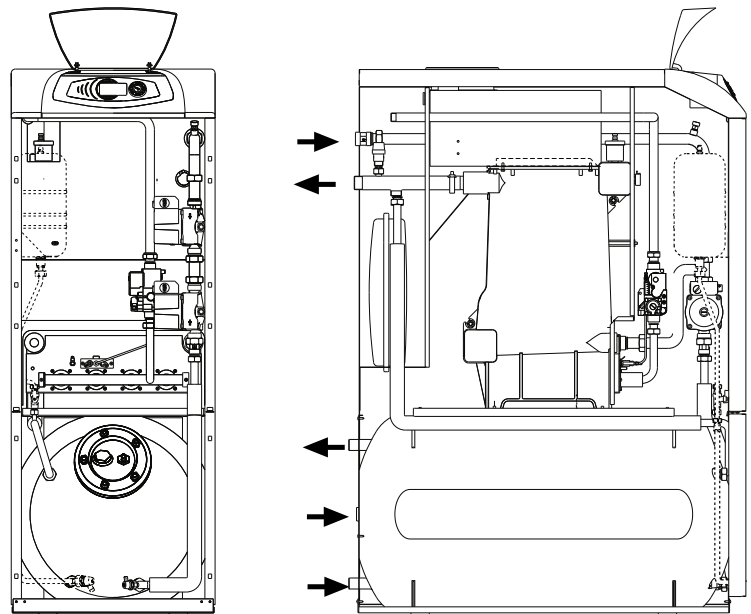

**ATTENTION:**

DHW expansion vessel and filling valve are not supplied.  
The drawing represents a possible lodging of a generic expansion vessel

| MODEL                      |                  |          | D 30 K 130      | D 40 K 130      | D 45 K 130      |
|----------------------------|------------------|----------|-----------------|-----------------|-----------------|
| Heat input                 | Max Heating      | kW       | 32,2            | 42,9            | 49,5            |
|                            | Min              | kW       | 14,9            | 19,7            | 19,7            |
| Heat output                | Max Heating      | kW       | 30,2            | 40,1            | 45,0            |
|                            | Min              | kW       | 13,5            | 17,7            | 17,2            |
| Efficiency                 | 80°C - 60°C      | Pmax %   | 93,7            | 93,5            | 90,9            |
|                            | 30% partial load | %        | 91,8            | 92,5            | 91,6            |
| Section                    |                  | Quantity | 4               | 5               | 5               |
| DHW content                |                  | litres   | 130             | 130             | 130             |
| DHW production             | Δt 30°C          | l/10min  | 250             | 250             | 250             |
|                            | Δt 30°C          | l/h      | 850             | 850             | 850             |
| Heating operating pressure | Max              | bar      | 6               | 6               | 6               |
| Empty weight               |                  | kg       | 250             | 275             | 275             |
| Dimensions                 | WxHxD            | mm       | 500x1345x950    | 500x1345x950    | 500x1345x950    |
| <b>CODE</b>                |                  |          | <b>OF4U4TWA</b> | <b>OF4U5TWA</b> | <b>OF4U5DWA</b> |

# PEGASUS

## CAST-IRON ATMOSPHERIC GAS BOILER, HEATING ONLY




- Boiler body made of assembled **G20 cast iron sections**, generously insulated by a rockwool layer externally lined with tearproof material
- Atmospheric burner with AISI 304 steel heads, electronic ignition with intermittent pilot flame and safety device detecting the ionisation current produced by the flame
- Variable heat input, with **two-stages** operation (except model 56)
- Flues collector with semi-integrated antirefouleur and flues test point
- For smaller boilers (56÷107 kW) element with factory name "B.A.G. 21" is used, whereas for higher outputs (119÷289 kW) a bigger element (namely "LS3") is used
- Efficient operation thanks to the **large heat exchange surface** of the cast-iron section, and the generous insulation of the boiler body
- Possibility to install the modules in cascade with a side-by-side or back-to-back layout
- Steel casing painted white by anaphoresis using epoxy powder paint
- Control board is **preset** for integration of an electronic controller



Element  
mod. 119÷289  
Type LS3

### SCHEME

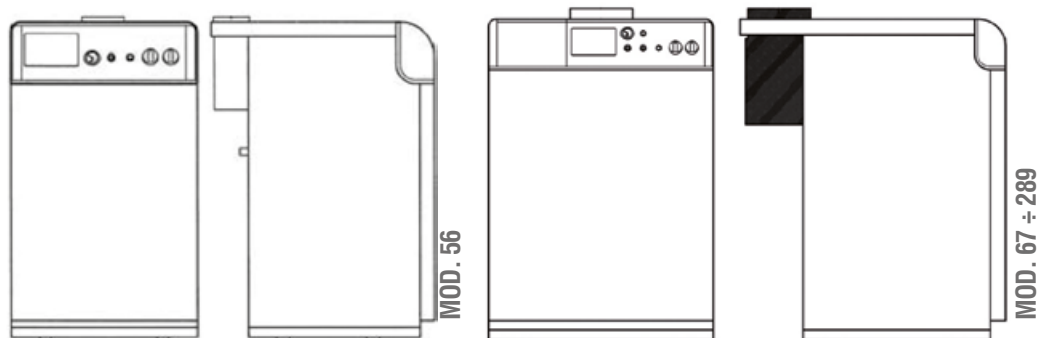

| MODEL                      |         |        | 56       | 67       | 77       | 87       | 97       | 107      | 119      | 136      | 153      | 170      | 187      | 221      | 255      | 289      |
|----------------------------|---------|--------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Heat input                 | Max     | kW     | 61,6     | 73,3     | 84,2     | 95,2     | 106,0    | 117,0    | 131,0    | 149,0    | 168,0    | 187,0    | 206,0    | 243,0    | 280,0    | 317,0    |
|                            | Min     | kW     | 24,5     | 31,0     | 35,7     | 40,3     | 45,0     | 49,0     | 77,0     | 89,0     | 100,0    | 110,0    | 122,0    | 144,0    | 166,0    | 188,0    |
| Heat output                | Max     | kW     | 56,0     | 67,0     | 77,0     | 87,0     | 97,0     | 107,0    | 119,0    | 136,0    | 153,0    | 170,0    | 187,0    | 221,0    | 255,0    | 289,0    |
|                            | Min     | kW     | 21,6     | 27,3     | 31,4     | 35,5     | 39,6     | 43,0     | 71,0     | 82,0     | 92,0     | 102,0    | 112,0    | 133,0    | 153,0    | 173,0    |
| Efficiency                 | 80-60°C | Pmax % | 90,9     | 91,4     | 91,5     | 91,4     | 91,5     | 91,5     | 91,2     | 91,3     | 91,4     | 91,5     | 91,6     | 91,7     | 91,9     | 92,0     |
| Number of elements         |         | no.    | 6        | 7        | 8        | 9        | 10       | 11       | 8        | 9        | 10       | 11       | 12       | 14       | 16       | 18       |
| Operating temperature      | Max     | °C     | 100      | 100      | 100      | 100      | 100      | 100      | 100      | 100      | 100      | 100      | 100      | 100      | 100      | 100      |
| Heating operating pressure | Max     | bar    | 6        | 6        | 6        | 6        | 6        | 6        | 6        | 6        | 6        | 6        | 6        | 6        | 6        | 6        |
| Heating water content      |         | litres | 16,6     | 19,1     | 21,6     | 24,1     | 26,6     | 29,1     | 38       | 42       | 46       | 50       | 54       | 62       | 70       | 78       |
| Depth                      |         | mm     | 83       | 760      | 760      | 760      | 760      | 760      | 760      | 1050     | 1050     | 1050     | 1050     | 1050     | 1050     | 1050     |
| Height                     |         | mm     | 600      | 760      | 850      | 930      | 1020     | 1100     | 930      | 1020     | 1100     | 1190     | 1270     | 1440     | 1610     | 1780     |
| Width                      |         | mm     | 850      | 970      | 970      | 970      | 970      | 970      | 1050     | 1050     | 1050     | 1050     | 1050     | 1050     | 1050     | 1050     |
| CODE                       |         |        | 0E4L6AWA | 0E4L7AWA | 0E4L8AWA | 0E4L9AWA | 0E4LAAWA | 0E4LBAWA | 0E2LBAWA | 0E2L9AWA | 0E2LAAWA | 0E2LBAWA | 0E2LCAWA | 0E2LEAWA | 0E2LGAWA | 0E2LIAWA |

# FLUES CHIMNEY ACCESSORIES CONDENSING GAS BOILERS

## 1KWMA56W



1 mt Concentric terminal pipe, Ø 60/100 mm, external PVC, internal PPs.  
Includes wall gasket.

## 1KWMA58W



1 mt Concentric terminal pipe, Ø 80/125 mm, external PVC, internal PPs.  
Includes wall gasket.

## 1KWMA57W



1 mt M-F concentric extension, Ø 60/100 mm, external PVC, internal PPs

## 1KWMA59W



1 mt M-F concentric extension, Ø 80/125 mm, external PVC, internal PPs

## 041051X0



90° M-F concentric bend, Ø 60/100 mm, PPs

## 1KWMA73W



90° M-F concentric bend, Ø 80/125 mm, external aluminium, internal PPs

## 1KWMA83W



1 mt M-F pipe, Ø 80 mm, PPs

## 1KWMA01W



90° M-F bend, Ø 80 mm, PPs

## 1KWMA64W



45° M-F concentric bend, Ø 60/100 mm, external PVC, internal PPs

## 1KWMA72W



45° M-F concentric bend, Ø 80/125 mm, external PVC, internal PPs

## 1KWMA88W



90° M-F bend, Ø 60 mm, PPs

## 1KWMA65W



45° M-F bend, Ø 80 mm, PPs

## 1KWMA70W



Flue or air test point Ø 80 mm (M-F) PPs

## 041000X0



90° M-F bend, Ø 80 mm, PPs, with test point

## 041049X0



Concentric roof terminal, Ø 60/100 mm, external PVC, internal PPs (✱)

## 010036X0



Concentric roof terminal, Ø 80/125 mm, external PVC, internal PPs (✱)

# FLUES CHIMNEY ACCESSORIES CONDENSING GAS BOILERS

041050X0



M-F reduction,  
ø 80/60 mm

041086X0



1m extension,  
ø 50 mm

1KWMA89W



1m M-F pipe,  
ø 60 mm

041085X0



90° M-F bend,  
ø 50 mm

041087X0



Reduction,  
ø 80/50 mm



INCLUDES Ø 132 MM COLLAR (ADJUSTABLE IN HEIGHT) FOR CONNECTION TO FERROLI'S ROOF TILES.  
ACCESSORIES VALID FOR ROOM SEALED MODELS ONLY



# FLUES CHIMNEY ACCESSORIES TRADITIONAL GAS BOILERS AND WATER HEATERS

## 1KWMA56A



1 mt concentric terminal pipe, Ø 60/100 mm, external PVC, internal aluminium. Includes wall gasket.

## 1KWMA66A



1 mt concentric terminal pipe, Ø 60/100 mm, aluminium. Includes wall gasket.

## 1KWMR56A



1 MT concentric terminal pipe, Ø 80/125 mm, aluminium

## 1KWMA56U



1 mt M-F concentric extension, Ø 60/100 mm, external PVC, internal aluminium

## 1KWMR56U



1 mt M-F concentric extension, Ø 80/125 mm, external PVC, internal aluminium

## 1KWMA81W



90° M-F concentric bend, Ø 60/100 mm, external PVC, internal aluminium

## 010002X0



90° M-F concentric bend, Ø 80/125 mm, external PVC, internal aluminium

## 1KWMA31W



45° M-F concentric bend, Ø 60/100 mm, external PVC, internal aluminium

## 1KWMA72K



45° M-F concentric bend, Ø 80/125 mm, aluminium

## 1KWMA08K



1 mt M-F pipe, Ø 100 mm, aluminium

## 1KWMA38A



0,5 mt M-F pipe, Ø 80 mm, aluminium

## 1KWMA70U



90° M-F bend, Ø 80 mm, aluminium, with test point

## 1KWMA82A



90° M-F bend, Ø 80 mm, aluminium

## 1KWMA04K



90° M-F bend, Ø 100 mm, aluminium

# FLUES CHIMNEY ACCESSORIES TRADITIONAL GAS BOILERS AND WATER HEATERS

## 1KWMA65A



45° M-F bend, Ø 80 mm, aluminium

## 1KWMA19K



Reduction nipple for flexible pipe, Ø 72/79 mm, stainless steel AISI 316 L

## 1KWMA03K



45° M-F bend, Ø 100 mm, aluminium

## 1KWMA16U



Vertical connection, Ø 80 mm, aluminium, with test point

## 1KWMA02K



90° F-F bend, Ø 80 mm, aluminium

## 1KWMA03U



M-F reduction, Ø 80-100 mm, aluminium

## 1KWMA01K



45° F-F bend, Ø 80 mm, aluminium

# FLUES CHIMNEY ACCESSORIES UNIVERSAL USE

Accessories valid for room sealed models only

## 1KWMA84A



Wall gasket, Ø 80 mm, silicon

## 1KWMR11A



Wall gasket, Ø 100 mm, silicon

## 1KWMA91A



Wall gasket, Ø 60 mm, silicon

## 1KWMR09A



Wall gasket, Ø 125 mm, silicon

## 1KWMA85A



Air terminal, Ø 80mm, stainless steel

## 1KWMA14K



Air terminal Ø 100 mm, stainless steel

## 1KWMA86A



Flue terminal, Ø 80 mm, stainless steel

## 1KWMA29K



Flue terminal Ø 100 mm, stainless steel

## 1KWMA90A



Flue terminal, Ø 60 mm, stainless steel

## 1KWMA07U



Connection joint, Ø 80 mm, steel

## 1KWMA08U



Connection joint, Ø 100 mm, steel

## 1KWMA81U



Roof tile for flat roofs, PVC Ø 132 mm

## 1KWMA86U



Roof reduction from Ø 125 mm to Ø 80 mm, PVC  
(For adaption of code 010026X to evacuation chimney  
only thus closing air inlet)

## 1KWMA82U



Roof tile for sloping roofs, PVC and lead moldable  
support Ø 132 mm

## 010026X0



Concentric roof terminal, Ø 80/125 mm, external  
plastic, internal aluminium, condensate-proof (✱)

**PHASING OUT**



# LOW NO<sub>x</sub> BURNERS

## LIGHT OIL BURNERS

COMPACT ECO 82  
SUN G/2 PRO 83

## GAS BURNERS

SUN NGX- SINGLE-STAGE 85  
SUN NGX- TWO-STAGE 87

# COMPACT ECO LOW NO<sub>x</sub> LIGHT OIL BURNERS SINGLE-STAGE




- Very low polluting emissions (lower than required by Class 3 - EN 267 <120 mg/kWh)
- Supplied complete with nozzle, hoses, light oil line filter and 7-pin plug and connection flange
- R version complete with light oil preheater
- Easy access to the air damper adjustments
- Ductable air intake

## Range


COMPACT ECO single-stage burners

COMPACT ECO single-stage burners with light oil preheater


## OPERATION FIELD

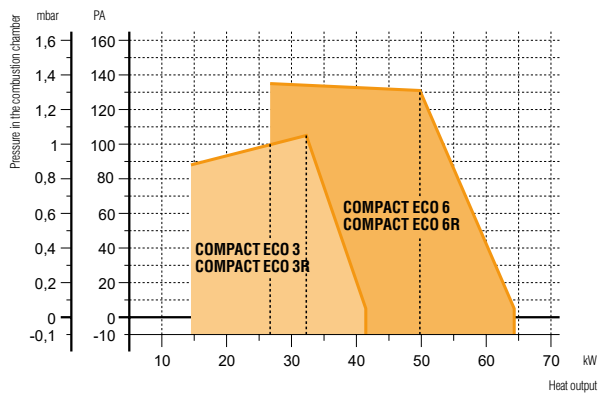

## DIMENSIONS

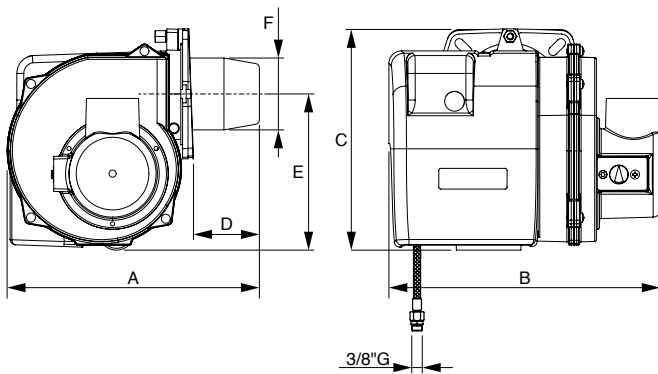

## COUPLING FLANGE



| MODEL          | A   | B   | C   | D  | E   | F  | G    | H (min) | H (max) | I    | L    | M   | WEIGHT |
|----------------|-----|-----|-----|----|-----|----|------|---------|---------|------|------|-----|--------|
|                | mm  | mm  | mm  | mm | mm  | mm | Ø mm | Ø mm    | Ø mm    | Ø mm | Ø mm | cm  | kg     |
| COMPACT ECO 3  | 280 | 305 | 245 | 75 | 175 | 80 | 85   | 135     | 160     | M8   | 170  | 144 | 10     |
| COMPACT ECO 3R | 280 | 305 | 245 | 75 | 175 | 80 | 85   | 135     | 160     | M8   | 170  | 144 | 10.1   |
| COMPACT ECO 6  | 280 | 305 | 245 | 75 | 175 | 80 | 85   | 135     | 160     | M8   | 170  | 144 | 10     |
| COMPACT ECO 6R | 280 | 305 | 245 | 75 | 175 | 80 | 85   | 135     | 160     | M8   | 170  | 144 | 10.1   |

| MODEL          | CALORIFIC | HEAT OUTPUT | MOTOR        | CODE     |
|----------------|-----------|-------------|--------------|----------|
|                | kg/h      | kW          | 230V ~ 50Hz  |          |
| COMPACT ECO 3  | 1.2 - 3.5 | 14.5 - 41.5 | 100 W single | OU3T6AXA |
| COMPACT ECO 3R | 1.2 - 3.5 | 14.5 - 41.5 | 100 W single | OU3T6RXA |
| COMPACT ECO 6  | 2.2 - 5.4 | 26.2 - 64.3 | 100 W single | OU3T8AXA |
| COMPACT ECO 6R | 2.2 - 5.4 | 26.2 - 64.3 | 100 W single | OU3T8RXA |


# SUN G/2 PRO LOW NO<sub>x</sub> LIGHT OIL BURNERS TWO-STAGE




- Very low polluting emissions (lower than required by Class 3 - EN 267 - < 120 mg/kWh)
- Two-stage operation with pressure interval
- Electric servo control on the air damper
- The entire series is fitted with sliding flange

## DIMENSIONS


### SUN G 9/2 - 14/2 PRO

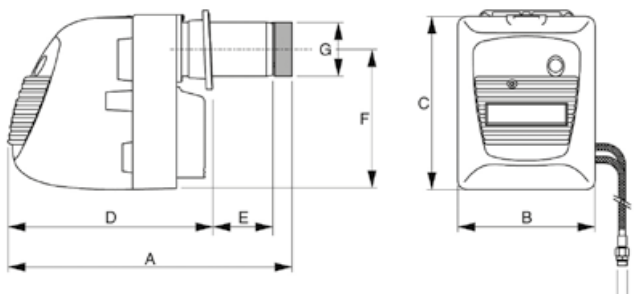

### SUN G 20/2 PRO

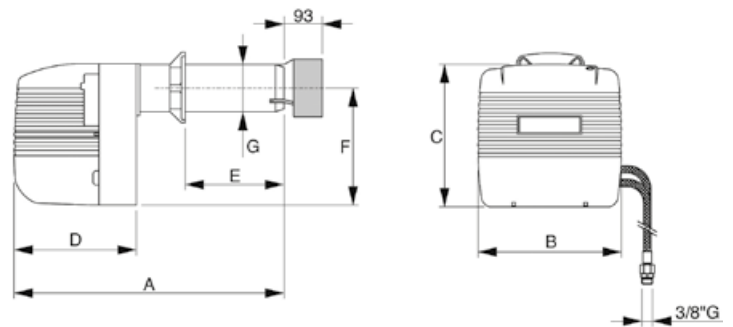

### SUN G 30/2 PRO

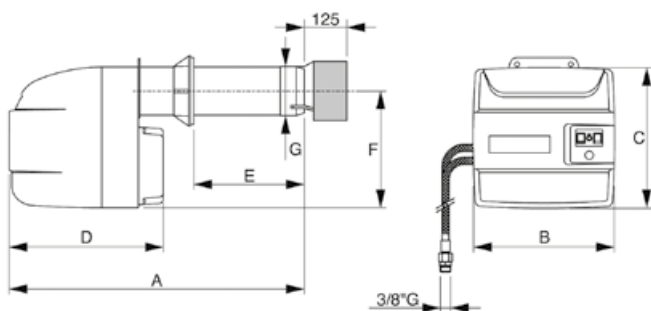


| MODEL                 | A   | B   | C   | D   | E   | F   | G    |
|-----------------------|-----|-----|-----|-----|-----|-----|------|
|                       | mm  | mm  | mm  | mm  | mm  | mm  | Ø mm |
| <b>SUN G 9/2 PRO</b>  | 515 | 275 | 340 | 358 | 130 | 274 | 90   |
| <b>SUN G 14/2 PRO</b> | 605 | 275 | 340 | 358 | 130 | 274 | 100  |
| <b>SUN G 20/2 PRO</b> | 660 | 360 | 356 | 320 | 280 | 275 | 120  |
| <b>SUN G 30/2 PRO</b> | 765 | 420 | 423 | 460 | 290 | 350 | 144  |


| MODEL                 | CALORIFIC   | HEAT OUTPUT | MOTOR        | CODE            |
|-----------------------|-------------|-------------|--------------|-----------------|
|                       | kg/h        | kW          | 230V - 50Hz  |                 |
| <b>SUN G 9/2 PRO</b>  | 2.92 - 9.72 | 34.8 - 115  | 100 W single | <b>OU3SCAXA</b> |
| <b>SUN G 14/2 PRO</b> | 5.5 - 13.0  | 65.5 - 155  | 185 W single | <b>OU3SEAXA</b> |
| <b>SUN G 20/2 PRO</b> | 8.5 - 21.8  | 101 - 260   | 250 W single | <b>OU3FAXA</b>  |
| <b>SUN G 30/2 PRO</b> | 12.3 - 31.9 | 147 - 379   | 370 W single | <b>OU3GAXA</b>  |

## COUPLING FLANGE AND WEIGHT


SUN G 9/2 PRO




SUN G 14/2 PRO



SUN G 30/2 PRO




SUN G 20/2 PRO




| MODEL          | H         | L    | M    | N    | WEIGHT |
|----------------|-----------|------|------|------|--------|
|                | Ø mm      | Ø mm | Ø mm | Ø mm | kg     |
| SUN G 9/2 PRO  | 140 - 180 | 95   | 180  | 154  | 11.5   |
| SUN G 14/2 PRO | 150 - 200 | 105  | 166  | 166  | 15     |
| SUN G 20/2 PRO | 160 - 226 | 135  | 214  | 205  | 21     |
| SUN G 30/2 PRO | 172 - 225 | 160  | 214  | 205  | 28     |

## OPERATION FIELD


SUN G 9/2 PRO

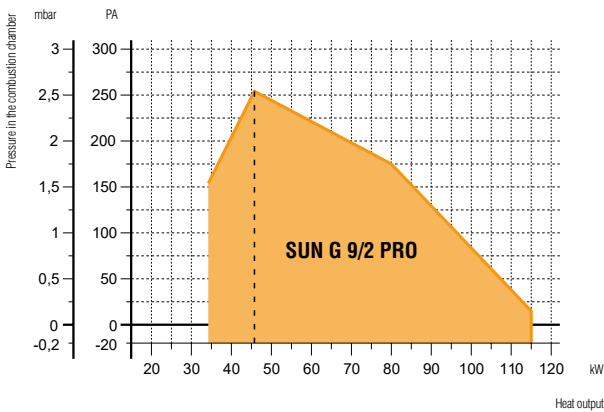


SUN G 14/2 PRO

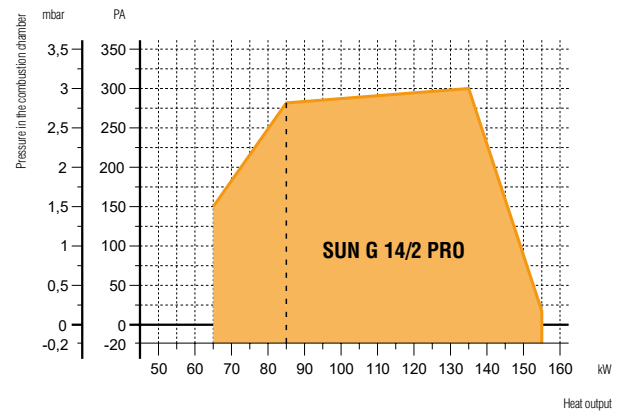

SUN G 20/2 PRO

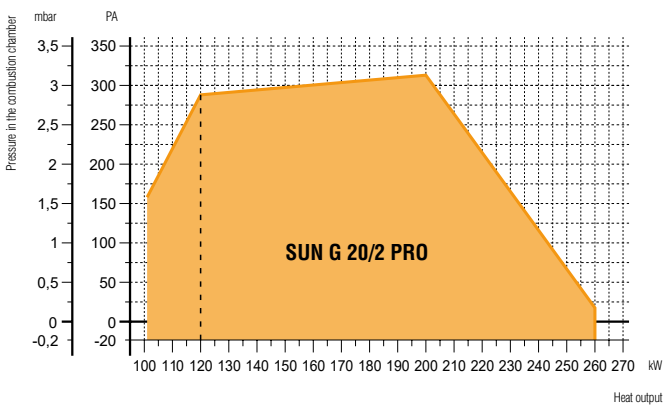

SUN G 30/2 PRO

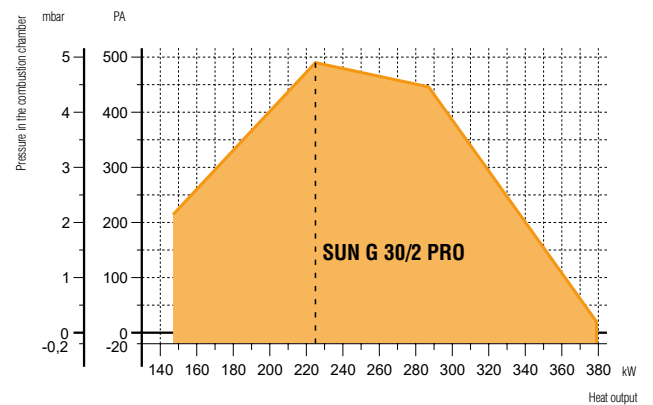


# SUN NGX LOW NO<sub>x</sub> GAS BURNERS SINGLE-STAGE




- Single-stage burners. Very low nox emissions (class 3 ≤ 80 mg/kwh) achieved with a special combustion head
- Operating with natural gas
- Gas train with stabiliser, double valve and filter
- Adjustable combustion head
- External combustion air regulator (mod. SUN NGX35 - SUN NGX70), or internal (mod. SUN NGX120 - SUN NGX200)
- Air damper with gravity closure when stopped
- Stabilised ventilation
- Accessories assembly kit and valve sealing control kit


## DIMENSIONS

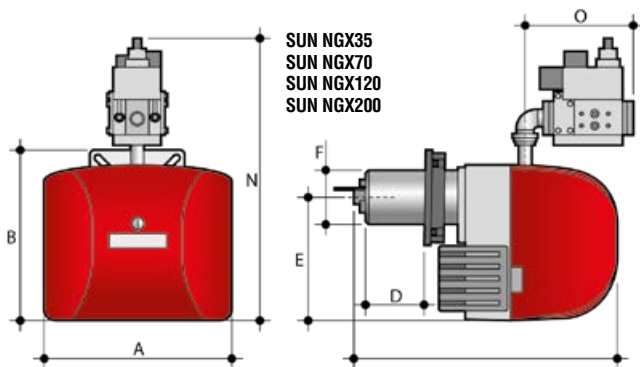

## COUPLING FLANGE



SUN NGX35 - SUN NGX70



SUN NGX120 - SUN NGX200


| MODEL             | A   | B   | C   | D (min-max) | E   | F    | N   | O   | G    | h - H     | I  | L   |
|-------------------|-----|-----|-----|-------------|-----|------|-----|-----|------|-----------|----|-----|
|                   | mm  | mm  | mm  | mm          | mm  | Ø mm | mm  | mm  | Ø mm | Ø mm      | mm | mm  |
| SUN NGX35 (S-15)  | 269 | 266 | 338 | 58 - 98     | 194 | 80   | 400 | 168 | 95   | 96 - 120  | M8 | 145 |
| SUN NGX35 (L-15)  | 269 | 266 | 418 | 58 - 178    | 194 | 80   | 400 | 168 | 95   | 96 - 120  | M8 | 145 |
| SUN NGX70 (S-15)  | 304 | 291 | 393 | 76          | 218 | 80   | 438 | 168 | 95   | 96 - 120  | M8 | 145 |
| SUN NGX70 (L-15)  | 304 | 291 | 461 | 76 - 149    | 218 | 80   | 438 | 168 | 95   | 96 - 120  | M8 | 145 |
| SUN NGX70 (S-20)  | 304 | 291 | 393 | 76          | 218 | 80   | 438 | 168 | 95   | 96 - 120  | M8 | 145 |
| SUN NGX70 (L-20)  | 304 | 291 | 461 | 76 - 149    | 218 | 80   | 438 | 168 | 95   | 96 - 120  | M8 | 145 |
| SUN NGX120 (S-20) | 373 | 340 | 581 | 85 - 170    | 245 | 108  | 560 | 220 | 128  | 108 - 158 | M8 | 188 |
| SUN NGX120 (L-20) | 373 | 340 | 681 | 85 - 270    | 245 | 108  | 560 | 220 | 128  | 108 - 158 | M8 | 188 |
| SUN NGX200 (S-20) | 373 | 340 | 581 | 85 - 170    | 245 | 115  | 560 | 220 | 134  | 108 - 158 | M8 | 188 |
| SUN NGX200 (L-20) | 373 | 340 | 681 | 85 - 270    | 245 | 115  | 560 | 220 | 134  | 108 - 158 | M8 | 188 |
| SUN NGX200 (S-25) | 373 | 340 | 581 | 85 - 170    | 245 | 115  | 560 | 220 | 134  | 108 - 158 | M8 | 188 |
| SUN NGX200 (L-25) | 373 | 340 | 681 | 85 - 270    | 245 | 115  | 560 | 220 | 134  | 108 - 158 | M8 | 188 |

| MODEL             | NATURAL GAS FLOW RATE | MIN. PRESSURE NATURAL GAS | HEAT OUTPUT | MOTOR                       | FAN MOTOR ABSORPTION | GAS TRAIN CONNECTION | CODE     |
|-------------------|-----------------------|---------------------------|-------------|-----------------------------|----------------------|----------------------|----------|
|                   | m <sup>3</sup> /h     | mbar*                     | kW          |                             | W                    | Ø                    |          |
| SUN NGX35 (S-15)  | 2.72 - 4.12           | 10                        | 27 - 41     | 230 V/ 50 Hz / single-phase | 75                   | 1/2"                 | 0U3C7CXA |
| SUN NGX35 (L-15)  | 2.72 - 4.12           | 10                        | 27 - 41     | 230 V/ 50 Hz / single-phase | 75                   | 1/2"                 | 0U3C7DXA |
| SUN NGX70 (S-15)  | 4.02 - 6.54           | 23                        | 40 - 65     | 230 V/ 50 Hz / single-phase | 100                  | 1/2"                 | 0U3C9AXA |
| SUN NGX70 (L-15)  | 4.02 - 6.54           | 23                        | 40 - 65     | 230 V/ 50 Hz / single-phase | 100                  | 1/2"                 | 0U3C9BXA |
| SUN NGX70 (S-20)  | 4.02 - 6.54           | 20                        | 40 - 65     | 230 V/ 50 Hz / single-phase | 100                  | 3/4"                 | 0U3C9CXA |
| SUN NGX70 (L-20)  | 4.02 - 6.54           | 20                        | 40 - 65     | 230 V/ 50 Hz / single-phase | 100                  | 3/4"                 | 0U3C9DXA |
| SUN NGX120 (S-20) | 7.54 - 12.07          | 13.5                      | 75 - 120    | 230 V/ 50 Hz / single-phase | 180                  | 3/4"                 | 0U3CCAXA |
| SUN NGX120 (L-20) | 7.54 - 12.07          | 13.5                      | 75 - 120    | 230 V/ 50 Hz / single-phase | 180                  | 3/4"                 | 0U3CCBXA |
| SUN NGX200 (S-20) | 8.55 - 15.09          | 15                        | 85 - 150    | 230 V/ 50 Hz / single-phase | 180                  | 3/4"                 | 0U3CDAXA |
| SUN NGX200 (L-20) | 8.55 - 15.09          | 15                        | 85 - 150    | 230 V/ 50 Hz / single-phase | 180                  | 3/4"                 | 0U3CDBXA |
| SUN NGX200 (S-25) | 8.55 - 15.09          | 11                        | 85 - 150    | 230 V/ 50 Hz / single-phase | 180                  | 1"                   | 0U3CDCXA |
| SUN NGX200 (L-25) | 8.55 - 15.09          | 11                        | 85 - 150    | 230 V/ 50 Hz / single-phase | 180                  | 1"                   | 0U3CDDXA |


\* Minimum gas pressure to obtain maximum burner output with 0 mbar pressure in the combustion chamber

## OPERATION FIELD


### SUN NGX35

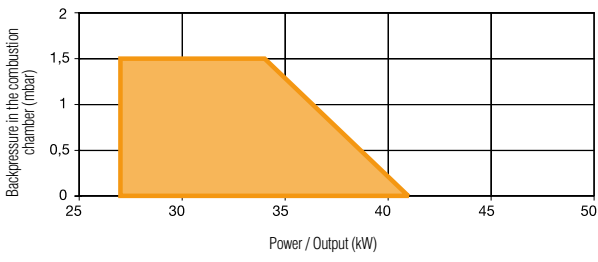


### SUN NGX70

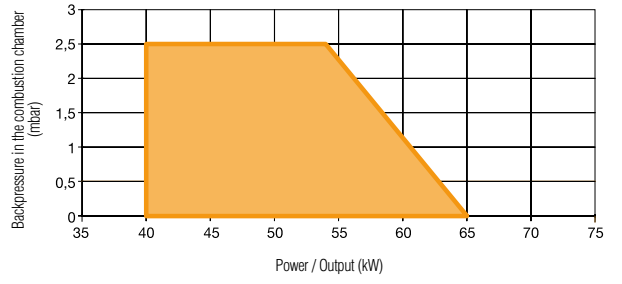


### SUN NGX35

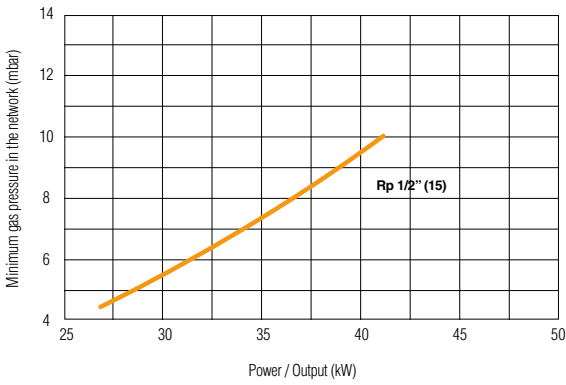


### SUN NGX70

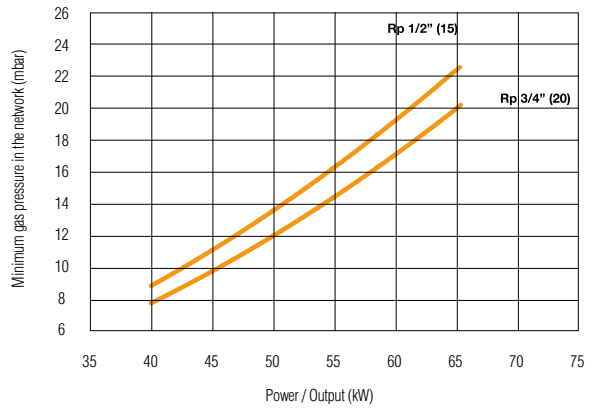


### SUN NGX120

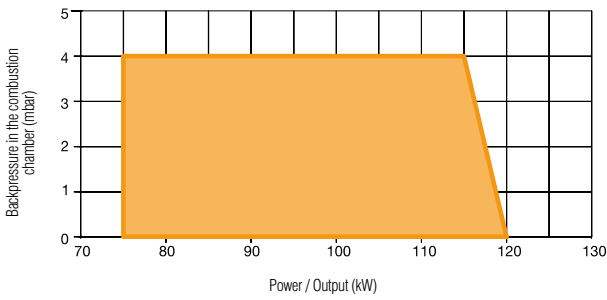


### SUN NGX200

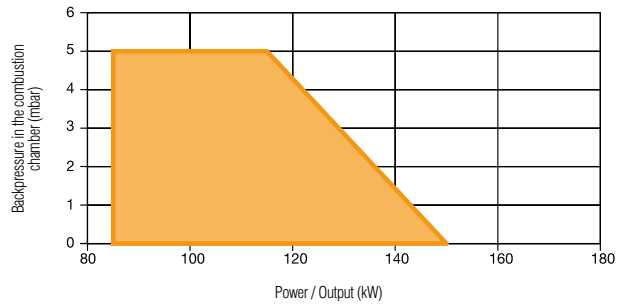

### SUN NGX120

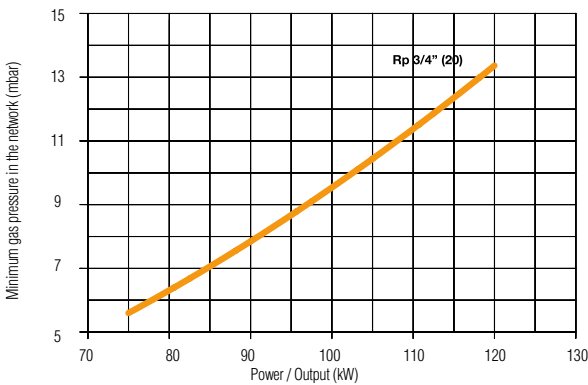

### SUN NGX200

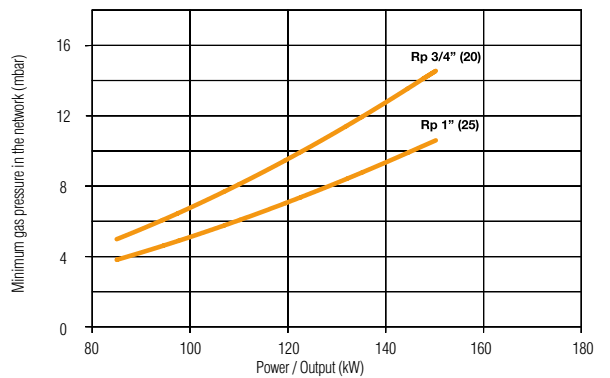

# SUN NGX LOW NO<sub>x</sub> GAS BURNERS

## TWO-STAGE



- Progressive two-stage burners (mod. 120 two-stage). very low NO<sub>x</sub> emissions (class 3 ≤ 80 mg/kwh) achieved with a special combustion head
- Optional continuous modulation operation by applying the module kit (on request)
- Operating with natural gas
- Gas train with stabiliser, double valve and filter
- Adjustable combustion head
- Electric servo control on the air damper and stabilised ventilation
- Adjustment of the gas flow rate through the variable profile cam controlled by the electric servo control
- Accessories assembly kit and valve sealing control kit
- Modulation kit (temperature/pressure) available as optional


| MODEL                | CALORIFIC         | MIN. PRESSURE<br>NATURAL GAS | POWER     | ELECTRIC POWER SUPPLY      | FAN<br>MOTOR<br>ABSORPTION | GAS TRAIN<br>CONNECTION | CODE     |
|----------------------|-------------------|------------------------------|-----------|----------------------------|----------------------------|-------------------------|----------|
|                      | m <sup>3</sup> /h | mbar*                        | kW        |                            |                            |                         |          |
| SUN NGX120 (AB S-20) | 3.52 - 12.07      | 13.5                         | 35 - 120  | 230 V/50 Hz / single-phase | 0.18 kW                    | 3/4"                    | OU3BCAXA |
| SUN NGX120 (AB L-20) | 3.52 - 12.07      | 13.5                         | 35 - 120  | 230 V/50 Hz / single-phase | 0.18 kW                    | 3/4"                    | OU3BCBXA |
| SUN NGX200 (PR S-25) | 4.02 - 15.09      | 11                           | 40 - 150  | 230 V/50 Hz / single-phase | 0.18 kW                    | 1"                      | OU3BDAXA |
| SUN NGX200 (PR L-25) | 4.02 - 15.09      | 11                           | 40 - 150  | 230 V/50 Hz / single-phase | 0.18 kW                    | 1"                      | OU3BDBXA |
| SUN NGX280 (PR S-25) | 6.04 - 19.11      | 16.5                         | 60 - 190  | 230 V/50 Hz / single-phase | 0.25 kW                    | 1"                      | OU3BEAXA |
| SUN NGX280 (PR L-25) | 6.04 - 19.11      | 16.5                         | 60 - 190  | 230 V/50 Hz / single-phase | 0.25 kW                    | 1"                      | OU3BEBXA |
| SUN NGX280 (PR S-32) | 6.04 - 19.11      | 15.5                         | 60 - 190  | 230 V/50 Hz / single-phase | 0.25 kW                    | 1" 1/4                  | OU3BECXA |
| SUN NGX280 (PR L-32) | 6.04 - 19.11      | 15.5                         | 60 - 190  | 230 V/50 Hz / single-phase | 0.25 kW                    | 1" 1/4                  | OU3BEDXA |
| SUN NGX280 (PR S-40) | 6.04 - 19.11      | 15                           | 60 - 190  | 230 V/50 Hz / single-phase | 0.25 kW                    | 1" 1/2                  | OU3BEEXA |
| SUN NGX280 (PR L-40) | 6.04 - 19.11      | 15                           | 60 - 190  | 230 V/50 Hz / single-phase | 0.25 kW                    | 1" 1/2                  | OU3BEFXA |
| SUN NGX350 (PR M-25) | 6.54 - 26.15      | 24                           | 65 - 260  | 230 V/50 Hz / single-phase | 0.37 kW                    | 1"                      | OU3BFAXA |
| SUN NGX350 (PR M-32) | 6.54 - 26.15      | 19                           | 65 - 260  | 230 V/50 Hz / single-phase | 0.37 kW                    | 1" 1/4                  | OU3BFCXA |
| SUN NGX350 (PR M-40) | 6.54 - 26.15      | 17.5                         | 65 - 260  | 230 V/50 Hz / single-phase | 0.37 kW                    | 1" 1/2                  | OU3BFEXA |
| SUN NGX400 (PR M-25) | 9.05 - 35.20      | 25                           | 90 - 350  | 230 V/50 Hz / single-phase | 0.37 kW                    | 1"                      | OU3BGAXA |
| SUN NGX400 (PR M-32) | 9.05 - 35.20      | 15                           | 90 - 350  | 230 V/50 Hz / single-phase | 0.37 kW                    | 1" 1/4                  | OU3BGCXA |
| SUN NGX400 (PR M-40) | 9.05 - 35.20      | 12                           | 90 - 350  | 230 V/50 Hz / single-phase | 0.37 kW                    | 1" 1/2                  | OU3BGEXA |
| SUN NGX400 (PR M-50) | 9.05 - 35.20      | 11.5                         | 90 - 350  | 230 V/50 Hz / single-phase | 0.37 kW                    | 2"                      | OU3BGGXA |
| SUN NGX550 (PR S-32) | 13.22 - 49.29     | 30                           | 132 - 490 | 230 V/50 Hz / single-phase | 0.62 kW                    | 1" 1/4                  | OU3BHAXA |
| SUN NGX550 (PR L-32) | 13.22 - 49.29     | 30                           | 132 - 490 | 230 V/50 Hz / single-phase | 0.62 kW                    | 1" 1/4                  | OU3BHBXA |
| SUN NGX550 (PR S-40) | 13.22 - 49.29     | 20                           | 132 - 490 | 230 V/50 Hz / single-phase | 0.62 kW                    | 1" 1/2                  | OU3BHFXA |
| SUN NGX550 (PR L-40) | 13.22 - 49.29     | 20                           | 132 - 490 | 230 V/50 Hz / single-phase | 0.62 kW                    | 1" 1/2                  | OU3BHDXA |
| SUN NGX550 (PR S-50) | 13.22 - 49.29     | 14                           | 132 - 490 | 230 V/50 Hz / single-phase | 0.62 kW                    | 2"                      | OU3BHEXA |
| SUN NGX550 (PR L-50) | 13.22 - 49.29     | 14                           | 132 - 490 | 230 V/50 Hz / single-phase | 0.62 kW                    | 2"                      | OU3BHFXA |

\* Minimum gas pressure to obtain maximum burner output with 0 mbar pressure in the combustion chamber


AB: Two-stage - PR: Progressive two-stage

## DIMENSIONS


SUN NGX120 (AB)  
SUN NGX200 (PR)

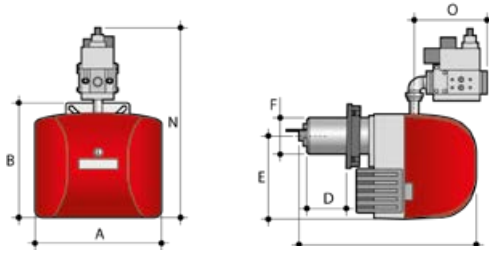

SUN NGX280 (PR)  
SUN NGX350 (PR)  
SUN NGX400 (PR)  
SUN NGX550 (PR)

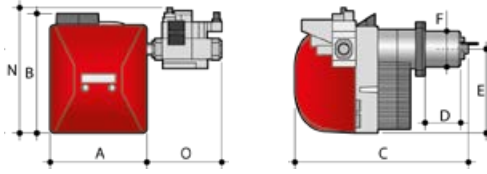

## COUPLING FLANGE

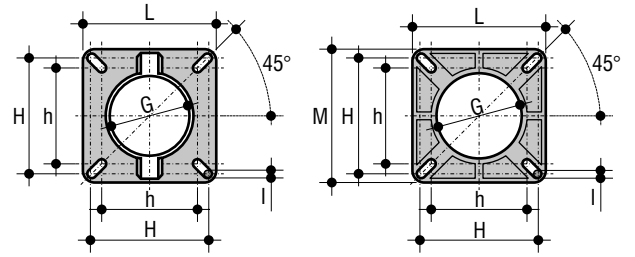

SUN NGX120 (AB)  
SUN NGX200 (PR)


SUN NGX280 (PR) - SUN NGX350 (PR)  
SUN NGX400 (PR) - SUN NGX550 (PR)

| MODEL                | A   | B   | C        | D (min-max) | E   | F    | N   | O   | G    | h - H   | I   | L   | M   |
|----------------------|-----|-----|----------|-------------|-----|------|-----|-----|------|---------|-----|-----|-----|
|                      | mm  | mm  | mm       | mm          | mm  | Ø mm | mm  | mm  | Ø mm | Ø mm    | mm  | mm  | mm  |
| SUN NGX120 (AB S-20) | 373 | 340 | 581      | 85-170      | 245 | 108  | 560 | -   | 128  | 108-158 | M8  | 188 | -   |
| SUN NGX120 (AB L-20) | 373 | 340 | 681      | 85-270      | 245 | 108  | 560 | -   | 128  | 108-158 | M8  | 188 | -   |
| SUN NGX200 (PR S-25) | 373 | 340 | 581      | 85-170      | 245 | 115  | 560 | -   | 134  | 108-158 | M8  | 188 | -   |
| SUN NGX200 (PR L-25) | 373 | 340 | 681      | 85-270      | 245 | 115  | 560 | -   | 134  | 108-158 | M8  | 188 | -   |
| SUN NGX280 (PR S-25) | 396 | 491 | 754      | 163         | -   | 113  | 508 | 200 | 164  | 131-179 | M10 | 215 | 223 |
| SUN NGX280 (PR L-25) | 396 | 491 | 899      | 308         | -   | 113  | 508 | 200 | 164  | 131-179 | M10 | 215 | 223 |
| SUN NGX280 (PR S-32) | 396 | 491 | 754      | 163         | -   | 113  | 508 | 200 | 164  | 131-179 | M10 | 215 | 223 |
| SUN NGX280 (PR L-32) | 396 | 491 | 899      | 308         | -   | 113  | 508 | 200 | 164  | 131-179 | M10 | 215 | 223 |
| SUN NGX280 (PR S-40) | 396 | 491 | 754      | 163         | -   | 113  | 517 | 330 | 164  | 131-179 | M10 | 215 | 223 |
| SUN NGX280 (PR L-40) | 396 | 491 | 899      | 308         | -   | 113  | 517 | 330 | 164  | 131-179 | M10 | 215 | 223 |
| SUN NGX350 (PR M-25) | 396 | 491 | 778      | 178 or 308* | -   | 131  | 508 | 200 | 164  | 131-179 | M10 | 215 | 223 |
| SUN NGX350 (PR L-32) | 396 | 491 | 908      | 178 or 308* | -   | 131  | 508 | 200 | 164  | 131-179 | M10 | 215 | 223 |
| SUN NGX350 (PR M-40) | 396 | 491 | 778      | 178 or 308* | -   | 131  | 517 | 330 | 164  | 131-179 | M10 | 215 | 223 |
| SUN NGX400 (PR M-25) | 396 | 491 | 798 + 19 | 198 or 308* | -   | 148  | 508 | 200 | 168  | 131-179 | M10 | 215 | 223 |
| SUN NGX400 (PR M-32) | 396 | 491 | 798 + 19 | 198 or 308* | -   | 148  | 508 | 200 | 168  | 131-179 | M10 | 215 | 223 |
| SUN NGX400 (PR M-40) | 396 | 491 | 798 + 19 | 198 or 308* | -   | 148  | 517 | 330 | 168  | 131-179 | M10 | 215 | 223 |
| SUN NGX400 (PR M-50) | 396 | 491 | 798 + 19 | 198 or 308* | -   | 148  | 567 | 330 | 168  | 131-179 | M10 | 215 | 223 |
| SUN NGX550 (PR S-32) | 426 | 533 | 874      | 253         | 384 | 168  | 543 | 245 | 198  | 157-192 | M10 | 241 | 241 |
| SUN NGX550 (PR L-32) | 426 | 533 | 974      | 353         | 384 | 168  | 543 | 245 | 198  | 157-192 | M10 | 241 | 241 |
| SUN NGX550 (PR S-40) | 426 | 533 | 874      | 253         | 384 | 168  | 553 | 318 | 198  | 157-192 | M10 | 241 | 241 |
| SUN NGX550 (PR L-40) | 426 | 533 | 974      | 353         | 384 | 168  | 553 | 318 | 198  | 157-192 | M10 | 241 | 241 |
| SUN NGX550 (PR S-50) | 426 | 533 | 874      | 253         | 384 | 168  | 603 | 318 | 198  | 157-192 | M10 | 241 | 241 |
| SUN NGX550 (PR L-50) | 426 | 533 | 974      | 353         | 384 | 168  | 603 | 318 | 198  | 157-192 | M10 | 241 | 241 |


\* Nozzle adjustable to 2 lengths

## OPERATION FIELD


SUN NGX120 (AB)

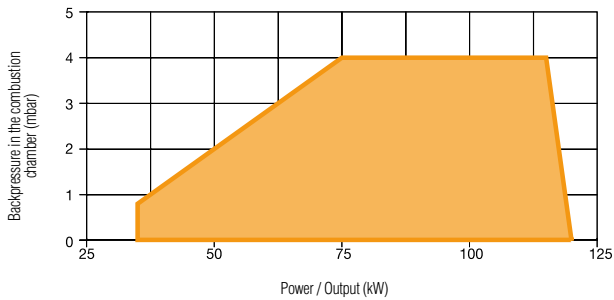


SUN NGX200 (PR)

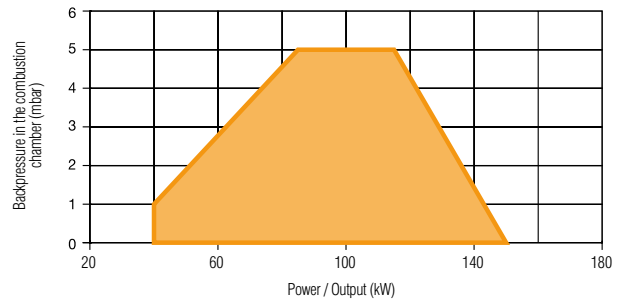

SUN NGX120 (AB)

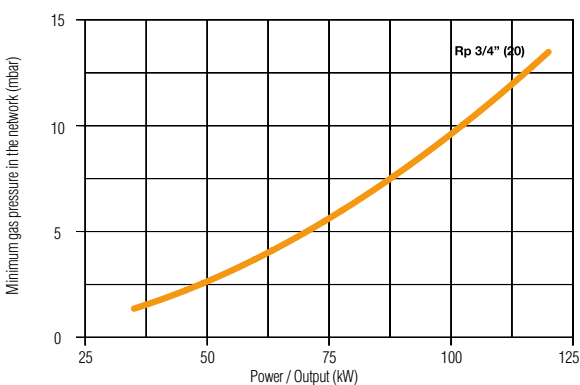


SUN NGX200 (PR)

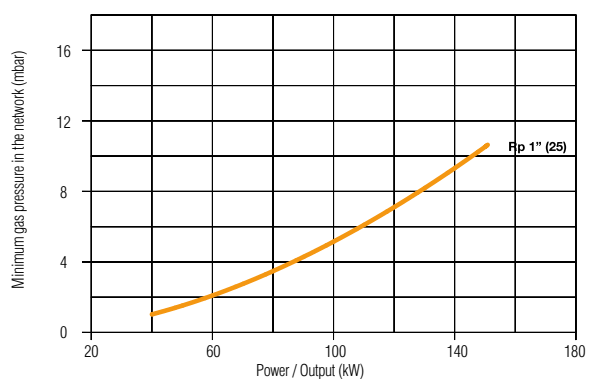




# OPERATION FIELD


**SUN NGX280 (PR)**

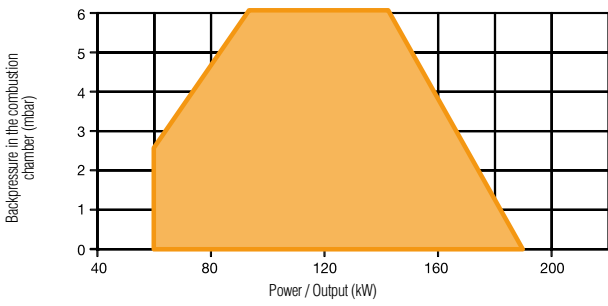


**SUN NGX350 (PR)**

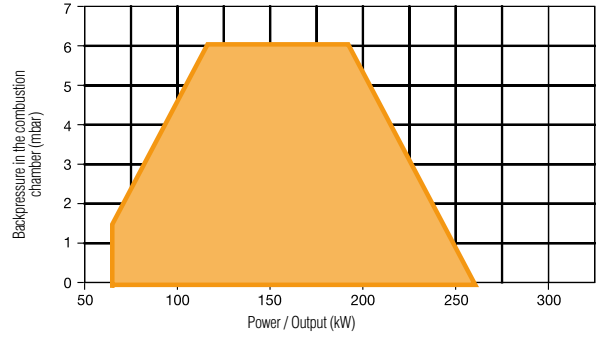


**SUN NGX280 (PR)**

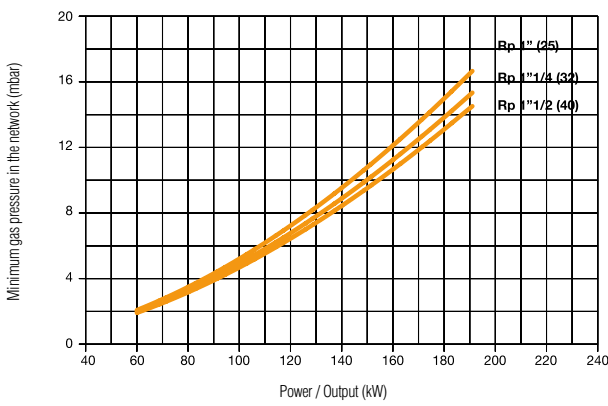


**SUN NGX350 (PR)**

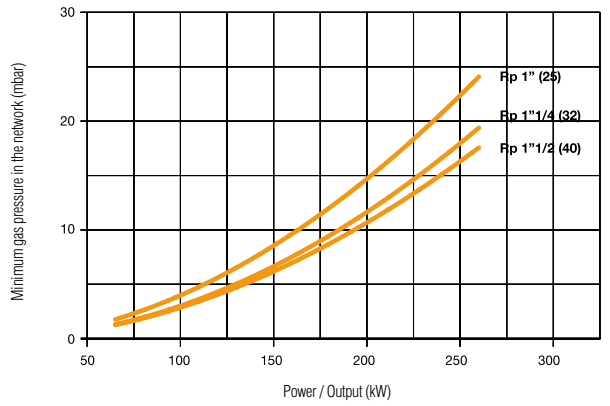


**SUN NGX400 (PR)**

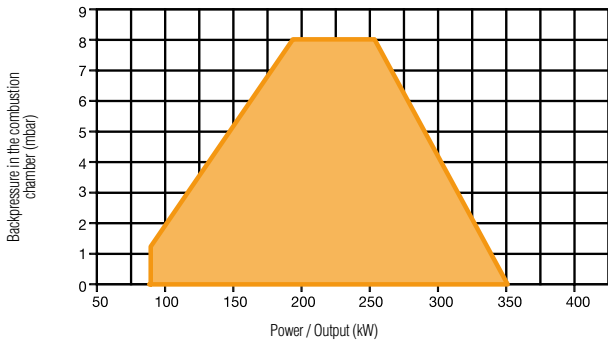


**SUN NGX550 (PR)**

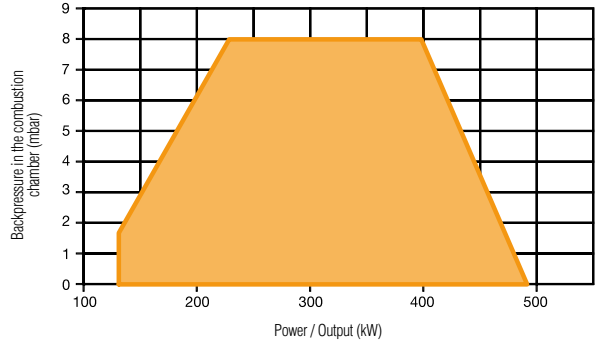

**SUN NGX400 (PR)**

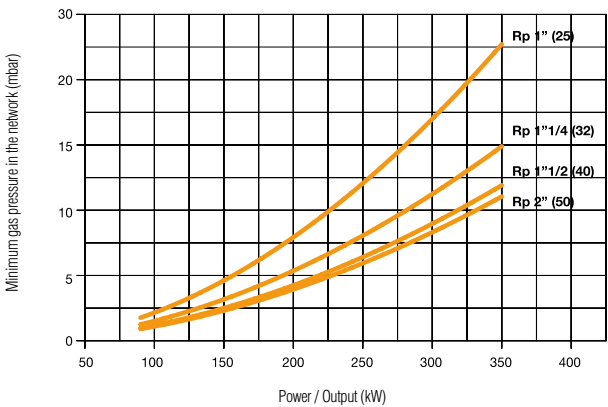

**SUN NGX550 (PR)**

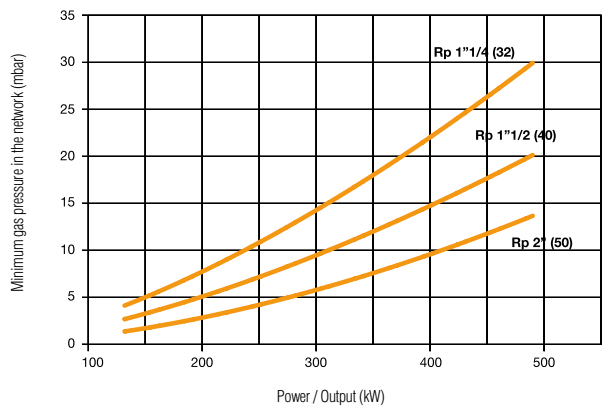



## > MODULATION KIT

The regulator converts the progressive two-stage operation of the burner into modulating mode.  
KIT COMPOSED OF: regulator, immersion temperature probe (0°C - 130°C), connection cables to the burner

| CODE     | DESCRIPTION                     |
|----------|---------------------------------|
| 094002X0 | TEMPERATURE REGULATOR AND PROBE |



## > SEALING CONTROL KIT

Compact valve sealing control system. The device operates according to the principle of pressure creation. The programmer starts up with heat request.

TECHNICAL CHARACTERISTICS: max operating pressure of 500 mbar, 230V - 50 Hz power supply, room temperature of -15°C to +70°C, consent time 10 - 26 sec, can be combined with models SUN EM 20-30-50-70

| CODE     | DESCRIPTION         |
|----------|---------------------|
| 094007X0 | SEALING CONTROL KIT |

# BOILER / LOW NOX BURNER COMBINATIONS

| GENERATOR           |           | LIGHT OIL BURNER |                      |           | GAS BURNER           |                          |           |
|---------------------|-----------|------------------|----------------------|-----------|----------------------|--------------------------|-----------|
| MODEL               | CODE      | MODEL            | TYPE                 | CODE      | MODEL                | TYPE                     | CODE      |
| ATLAS D 25 (WN) -E  | 0IHJ3PWA  | COMPACT ECO 3    | Single-stage Low NOx | 0U3T6AXA  | -                    | -                        | -         |
|                     |           | COMPACT ECO 3R   | Single-stage Low NOx | 0U3T6RAXA | -                    | -                        | -         |
| ATLAS D 37 (WN) -E  | 0IHJ4PWA  | COMPACT ECO 6    | Single-stage Low NOx | 0U3T8AXA  | -                    | -                        | -         |
|                     |           | COMPACT ECO 6R   | Single-stage Low NOx | 0U3T8RAXA | -                    | -                        | -         |
| ATLAS D 50 (WN) -E  | 0IHJ5PWA  | COMPACT ECO 6    | Single-stage Low NOx | 0U3T8AXA  | -                    | -                        | -         |
|                     |           | COMPACT ECO 6R   | Single-stage Low NOx | 0U3T8RAXA | -                    | -                        | -         |
| ATLAS D 63 (WN) -E  | 0IHJ6PWA  | SUN G 9/2 PRO    | Two-stage Low NOx    | 0U3SCAXA  | -                    | -                        | -         |
| ATLAS D 75 (WN) -E  | 0IHJ7PWA  | SUN G 9/2 PRO    | Two-stage Low NOx    | 0U3SCAXA  | -                    | -                        | -         |
| PREXTHERM RSW 92 N  | 0QIJ3AXA  | SUN G 9/2 PRO    | Two-stage Low NOx    | 0U3SCAXA  | SUN NGX120 (L-20)    | Single-stage Low NOx     | 0U3CCBXA  |
|                     |           |                  |                      |           | SUN NGX120 (AB L-20) | Low NOx Two-stage        | 0U3BCBXA  |
| PREXTHERM RSW 107 N | 0QIJ4AXA  | SUN G 15/2 PRO   | Low NOx Two-stage    | 0U3SEAXA  | SUN NGX120 (L-20)    | Single-stage Low NOx     | 0U3CCBXA  |
|                     |           |                  |                      |           | SUN NGX120 (AB L-20) | Low NOx Two-stage        | 0U3BCBXA  |
| PREXTHERM RSW 152 N | 0QIJ6AXA  | SUN G 20/2 PRO   | Low NOx Two-stage    | 0U3SFAXA  | SUN NGX280 (PR L-25) | Progr. two-stage Low NOx | 0U3BEBXA  |
|                     |           |                  |                      |           | SUN NGX280 (PR L-32) | Progr. two-stage Low NOx | 0U3BEDXA  |
|                     |           |                  |                      |           | SUN NGX280 (PR L-40) | Progr. two-stage Low NOx | 0U3BEFAXA |
|                     |           |                  |                      |           | SUN NGX280 (PR L-25) | Progr. two-stage Low NOx | 0U3BEBXA  |
| PREXTHERM RSW 190 N | 0QIJ7AXA  | SUN G 20/2 PRO   | Low NOx Two-stage    | 0U3SFAXA  | SUN NGX280 (PR L-32) | Progr. two-stage Low NOx | 0U3BEDXA  |
|                     |           |                  |                      |           | SUN NGX280 (PR L-40) | Progr. two-stage Low NOx | 0U3BEFAXA |
|                     |           |                  |                      |           | SUN NGX400 (PR M-25) | Progr. two-stage Low NOx | 0U3BGAXA  |
|                     |           |                  |                      |           | SUN NGX400 (PR M-32) | Progr. two-stage Low NOx | 0U3BGCXA  |
| PREXTHERM RSW 240 N | 0QIJ8AXA  | SUN G 30/2 PRO   | Low NOx Two-stage    | 0U3SGAXA  | SUN NGX400 (PR M-40) | Progr. two-stage Low NOx | 0U3BGEXA  |
|                     |           |                  |                      |           | SUN NGX400 (PR M-50) | Progr. two-stage Low NOx | 0U3BGGXA  |
|                     |           |                  |                      |           | SUN NGX400 (PR M-25) | Progr. two-stage Low NOx | 0U3BGAXA  |
|                     |           |                  |                      |           | SUN NGX400 (PR M-32) | Progr. two-stage Low NOx | 0U3BGCXA  |
| PREXTHERM RSW 300 N | 0QIJ9AXA  | SUN G 30/2 PRO   | Low NOx Two-stage    | 0U3SGAXA  | SUN NGX400 (PR M-40) | Progr. two-stage Low NOx | 0U3BGEXA  |
|                     |           |                  |                      |           | SUN NGX400 (PR M-50) | Progr. two-stage Low NOx | 0U3BGGXA  |
|                     |           |                  |                      |           | SUN NGX400 (PR M-25) | Progr. two-stage Low NOx | 0U3BGAXA  |
|                     |           |                  |                      |           | SUN NGX400 (PR M-32) | Progr. two-stage Low NOx | 0U3BGCXA  |
| PREXTHERM RSW 350 N | 0QIJAAAXA | SUN G 30/2 PRO   | Low NOx Two-stage    | 0U3SGAXA  | SUN NGX400 (PR M-40) | Progr. two-stage Low NOx | 0U3BGEXA  |
|                     |           |                  |                      |           | SUN NGX400 (PR M-50) | Progr. two-stage Low NOx | 0U3BGGXA  |
|                     |           |                  |                      |           | SUN NGX550 (PR L-32) | Progr. two-stage Low NOx | 0U3BHBXA  |
|                     |           |                  |                      |           | SUN NGX550 (PR L-40) | Progr. two-stage Low NOx | 0U3BHDXA  |
| TP3 COND 65         | ORGZ3AXD  | SUN G 9/2 PRO    | Two-stage Low NOx    | 0U3SCAXA  | SUN NGX70 (L-15)     | Single-stage Low NOx     | 0U3C9BXA  |
|                     |           |                  |                      |           | SUN NGX70 (L-20)     | Single-stage Low NOx     | 0U3C9DXA  |
| TP3 COND 100        | ORGZ4AXD  | SUN G 9/2 PRO    | Two-stage Low NOx    | 0U3SCAXA  | SUN NGX120 (L-20)    | Single-stage Low NOx     | 0U3CCBXA  |
|                     |           |                  |                      |           | SUN NGX120 (AB L-20) | Low NOx Two-stage        | 0U3BCBXA  |
| TP3 COND 150        | ORGZ5AXD  | SUN G 15/2 PRO   | Low NOx Two-stage    | 0U3SEAXA  | SUN NGX280 (PR L-25) | Progr. two-stage Low NOx | 0U3BEBXA  |
|                     |           |                  |                      |           | SUN NGX280 (PR L-32) | Progr. two-stage Low NOx | 0U3BEDXA  |
|                     |           |                  |                      |           | SUN NGX280 (PR L-40) | Progr. two-stage Low NOx | 0U3BEFAXA |
|                     |           |                  |                      |           | SUN NGX350 (PR M-25) | Progr. two-stage Low NOx | 0U3BFAXA  |
| TP3 COND 230        | ORGZ8AXD  | SUN G 20/2 PRO   | Low NOx Two-stage    | 0U3SFAXA  | SUN NGX350 (PR M-32) | Progr. two-stage Low NOx | 0U3BFAXA  |
|                     |           |                  |                      |           | SUN NGX350 (PR M-40) | Progr. two-stage Low NOx | 0U3BFEXA  |
|                     |           |                  |                      |           | SUN NGX550 (PR L-32) | Progr. two-stage Low NOx | 0U3BHBXA  |
|                     |           |                  |                      |           | SUN NGX550 (PR L-40) | Progr. two-stage Low NOx | 0U3BHDXA  |
| TP3 COND 370        | ORGZBAXD  | SUN G 30/2 PRO   | Low NOx Two-stage    | 0U3SGAXA  | SUN NGX550 (PR L-50) | Progr. two-stage Low NOx | 0U3BHFAXA |
|                     |           |                  |                      |           | SUN NGX550 (PR L-50) | Progr. two-stage Low NOx | 0U3BHFAXA |

# BIOMASS

## **BOILER**

|               |    |
|---------------|----|
| EASYFIRE      | 92 |
| SFL / SUN P N | 93 |
| SUN P N       | 94 |
| SFL           | 95 |

## **HEATING STOVES**

|    |    |
|----|----|
| T  | 96 |
| AT | 97 |

# EASYFIRE

## PELLET BOILER



### > STRENGTHS:

- **Very compact pellet boiler** for central heating, including automatic burner
- Steel combustion chamber, fully thermal insulated
- **Completely cooled flue pass.** Large volumes of the reversal collectors for the best control of the temperature and speed of flues, incorporating steel turbolators
- **Fully inspectable:** in addition to the two doors, the flue gas collectors can also be inspected at the bottom (through the side and center plugs) and at the top (removing the cover panel)
- Firebox with cast iron grate, designed for optimum distribution of primary and secondary air.
- **Double post-combustion of fumes**
- Control panel with a complete interface display and a set of keys for a very easy boiler setting
- Large capacity of the pellet daily stock: 70 kg for models 29 - 35 - 39 and 50 kg for models 17 - 24


### BURNER

4 combustion levels



### TURBOLATORS AND CLEANING SYSTEM



| EASYFIRE                     |   |                | 17   | 24              | 29              | 35              | 39              |
|------------------------------|---|----------------|--|-----------------|-----------------|-----------------|-----------------|
| ErP Class                    |  | (G - A+ Class) | <b>A+</b>  | <b>A+</b>       | <b>A+</b>       | <b>A+</b>       | <b>A+</b>       |
| Heat input                   | Min   | kW             | 4,4  | 4,4             | 6,4             | 6,4             | 6,4             |
|                              | Max   | kW             | 17,0   | 23,2            | 29,0            | 34,4            | 38,3            |
| Heat output                  | Min   | kW             | 4,2  | 4,2             | 5,8             | 5,8             | 5,8             |
|                              | Max   | kW             | 16,2   | 22,0            | 27,4            | 32,4            | 34,9            |
| Efficiency                   | Pmax  | %              | 95,7   | 94,5            | 94,5            | 94,2            | 91,3            |
|                              | Pmin  | %              | 95,1   | 95,1            | 90,1            | 90,1            | 90,1            |
| Boiler class (EN 303-5 2012) |   |                | 5  | 5               | 5               | 5               | 5               |
| Fuel consumption             | Pmax  | Kg/h           | 3,5  | 4,8             | 6,0             | 7,1             | 7,9             |
|                              | Pmin  | Kg/h           | 0,9  | 0,9             | 1,3             | 1,3             | 1,3             |
| Set temperature of water     | Max   | °C             | 80   |                 |                 |                 |                 |
| Operating pressure           | Max   | bar            | 3  |                 |                 |                 |                 |
| Electrical power             |   | V/Hz           | 230/50   |                 |                 |                 |                 |
| Rated input power            |   | W              | Start 440 W - Stand-by 3 W - Nominal output 85 W - Reduced output 30 W |                 |                 |                 |                 |
| Dimensions                   | HxWxD   | mm             | 1306x580x698   |                 |                 | 1300x700x700    |                 |
| CODE                         |   |                | <b>L40DB30A</b>  | <b>L40EB30A</b> | <b>L40FB30A</b> | <b>L40GB30A</b> | <b>L40LB30A</b> |

# SFL / SUN P N PELLET BOILER




## > STRENGTHS:

- **Cast iron floor-standing heat generator**, combined with a **pellet burner** complete with fuel loading feed screw
- Maximum energy efficiency: approved as **class 5 according to directive 303-5**
- Cast iron boiler with pre-assembled and completely insulated elements
- **Large combustion chamber** to guarantee maximum thermal efficiency
- **Removable drawer** for easy access to ash collection
- **Ultra-compact pellet burner** supplied complete with automatic loading system consisting of motor and feed screw
- **The electronic board on the machine** offers perfect control of the boiler/burner system, pellet loading and the main elements of a domestic heating system (system circulator, circulator and/or three-way DHW valve, system flow sensor and storage tank, room thermostat or remote programmable thermostat)
- **The user interface** is characterised by a large display with adjustment keys on the top back of the cover hood, for easy reading and/or adjusting.
- The burner can be adjusted to operate in **single-stage** or with two type of **flame modulation** with 5 power levels.
- Two different types of optional storage boxes are available: **180 kg and 280 kg**

## > ACCESSORIES

| CODE     | DESCRIPTION   |
|----------|---|
| 096002X0 | PELLET STORAGE BOX (UNASSEMBLED) UP TO 195 dm <sup>3</sup>                    |
| 096004X0 | PELLET STORAGE BOX (UNASSEMBLED) UP TO 350 dm <sup>3</sup>                    |
| 033001X0 | SAFETY THERMOSTAT KIT (MANDATORY FOR OPERATION IN PELLETS ONLY CONFIGURATION) |
| 032010X0 | SAFETY COIL KIT COMPLETE WITH THERMOSTATIC VALVE FOR 3-ELEMENTS MODEL **      |
| 032011X0 | SAFETY COIL KIT COMPLETE WITH THERMOSTATIC VALVE FOR 4-ELEMENTS MODEL **      |
| 032012X0 | SAFETY COIL KIT COMPLETE WITH THERMOSTATIC VALVE FOR 5-ELEMENTS MODEL **      |
| 032013X0 | SAFETY COIL KIT COMPLETE WITH THERMOSTATIC VALVE FOR 6-ELEMENTS MODEL **      |
| 032014X0 | SAFETY COIL KIT COMPLETE WITH THERMOSTATIC VALVE FOR 7-ELEMENTS MODEL **      |

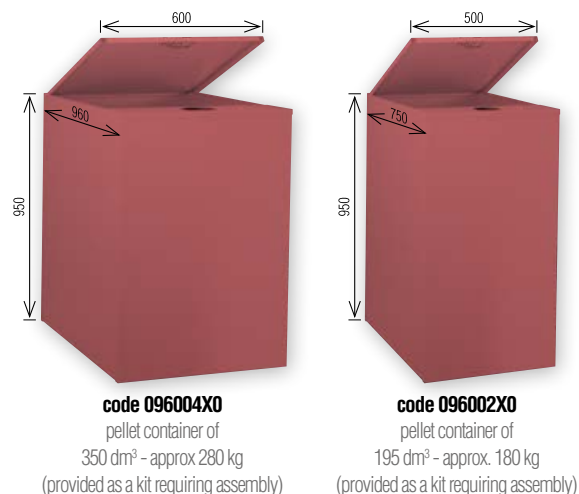

(\*\*) Compulsory for operation in reversible pellet or wood configuration

(\*\*\*) Referring to wood burning

| SFL/SUN P N                                    |                | 3/P7      | 4/P7      | 5/P12     | 6/P12     | 7/P12     |
|--|----------------|-----------|-----------|-----------|-----------|-----------|
| ErP Class ***                                  | (Class G - A+) | <b>A+</b> | <b>A+</b> | <b>A+</b> | <b>A+</b> | <b>A+</b> |
| Nominal heat input                             | kW             | 25.1      | 34.1      | 41.0      | 47.9      | 54.7      |
| Efficiency of heat output                      | kW             | 22.0      | 30.0      | 36.0      | 42.0      | 48.0      |
| Combustible capacity                           | Kg/h           | 5.3       | 7.2       | 8.6       | 10.1      | 11.5      |
| Number of elements                             | No.            | 3         | 4         | 5         | 6         | 7         |
| Max operating pressure                         | bar            | 4         | 4         | 4         | 4         | 4         |
| <b>PELLETS ONLY CONFIGURATION</b>              |                |           |           |           |           |           |
| SFL boiler code                                |                | 01CJ3TWA  | 01CJ4TWA  | 01CJ5TWA  | 01CJ6TWA  | 01CJ7TWA  |
| SUN P N burner code                            |                | 0U2F6DXA  | 0U2F6DXA  | 0U2F8DXA  | 0U2F8DXA  | 0U2F8DXA  |
| Code for pellet conversion kit                 |                | 035003X1  | 035003X1  | 035005X0  | 035005X0  | 035005X0  |
| <b>PELLET OR WOOD REVERSIBLE CONFIGURATION</b> |                |           |           |           |           |           |
| SFL boiler code                                |                | 01CJ3TWA  | 01CJ4TWA  | 01CJ5TWA  | 01CJ6TWA  | 01CJ7TWA  |
| SUN P N burner code                            |                | 0U2F6DXA  | 0U2F6DXA  | 0U2F8DXA  | 0U2F8DXA  | 0U2F8DXA  |
| Code for Pellet/Wood conversion                |                | 035004X0  | 035004X0  | 035006X0  | 035006X0  | 035006X0  |


# SUN P N PELLET BURNER



## > STRENGTHS:


- **Ultra-compact pellet burner** supplied complete with automatic loading system consisting of motor and feed screw
- **The electronic board on the machine** offers perfect control of the boiler/burner system, pellet loading and the main elements of a domestic heating system (system circulator, circulator and/or three-way DHW valve, system flow sensor and storage tank, room thermostat or remote programmable thermostat)
- The card's microprocessor recognises what system elements are connected and **configures automatically**
- **The user interface** is characterised by a large display with adjustment keys on the top back of the cover hood, for easy reading and/or adjusting.
- The burner can be adjusted to operate in **single-stage** or with two type of **flame modulation** with 5 power levels.
- As per standard it comes with a flame return safety thermostat calibrated at 85°C
- **Flame ignition** with electrical heating element and **detection** with photo-resistor
- Two different types of optional storage boxes are available: **180 kg and 280 kg**

## STORAGE BOX

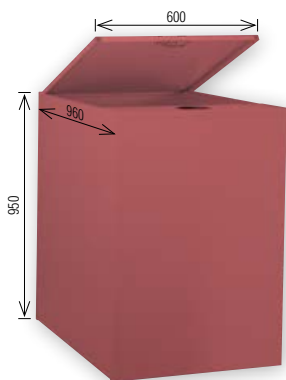

### code 096004X0


pellet container of 350 dm<sup>3</sup> - approx 280 kg (provided as a kit requiring assembly)

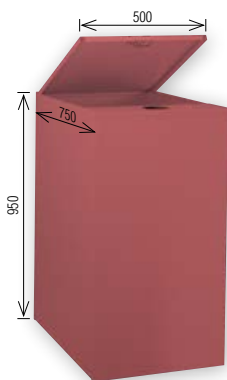


### code 096002X0

pellet container of 195 dm<sup>3</sup> - approx. 180 kg (provided as a kit requiring assembly)

## SUN P7 N

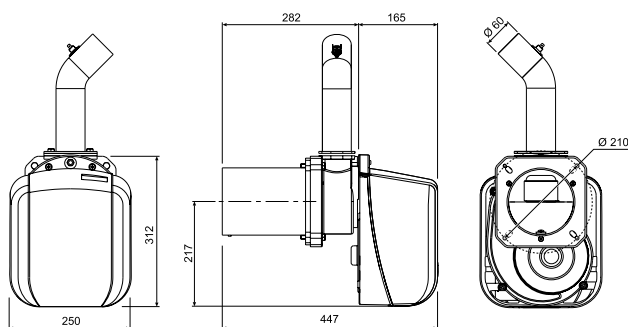

## SUN P12 N

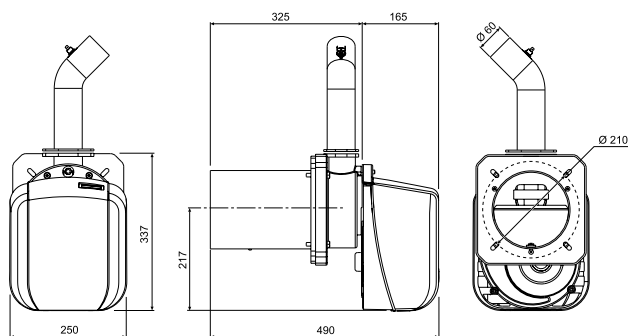

| MODEL                |          |      | 7 N               | 12 N              |
|----------------------|----------|------|-------------------|-------------------|
| Heat input           | Max      | kW   | 34.1              | 55.0              |
|                      | Min      | kW   | 13.7              | 30.0              |
| Combustible capacity | Max      | kg/h | 7.2               | 11.6              |
|                      | Min      | kg/h | 2.9               | 6.3               |
| Max pellet dimension | diameter | mm   | 6                 | 6                 |
|                      | length   | mm   | 35                | 35                |
| Power supply         |          | V/Hz | 230/50            | 230/50            |
| CODE                 |          |      | <b>OU2F6DXA *</b> | <b>OU2F8DXA *</b> |

## > TABLE OF BOILER/BURNER COMBINATIONS

| GENERATOR |          | BURNER    |          |
|-----------|----------|-----------|----------|
| MODEL     | CODE     | MODEL     | CODE     |
| SFL 3     | OICJ3TWA | SUN P7 N  | OU2F6DXA |
| SFL 4     | OICJ4TWA |           |          |
| SFL 5     | OICJ5TWA |           |          |
| SFL 6     | OICJ6TWA | SUN P12 N | OU2F8DXA |
| SFL 7     | OICJ7TWA |           |          |

\* CODE REFERRING ONLY TO THE BURNER, THE FEED SCREW AND THE MOTOR FOR PELLET LOADING

## > ACCESSORIES

| CODE     | DESCRIPTION  |
|----------|--|
| 096002X0 | PELLET STORAGE BOX (UNASSEMBLED) UP TO 195 dm <sup>3</sup> |
| 096004X0 | PELLET STORAGE BOX (UNASSEMBLED) UP TO 350 dm <sup>3</sup> |




### > STRENGTHS:

- Cast iron floor-standing heat generator for wood or coke combustion in the basic or pellet version with conversion kit
- G20 cast iron body with preassembled elements, insulated with a layer of fibre glass covered on the outside with tear-proof aluminium film
- Large loading door with front access
- Front ash unloading door and removable collection tray
- Manual adjustment damper on the rear flue gas exhaust
- Safety kit for no circulation, set at 95°C (optional)
- Thermostatic adjustment device (adjustable 30°C - 90°C) as per standard

### > ADVANTAGES OF SFL:

- High thermal efficiency guaranteed by the large exchange surface of the cast iron elements and the completely wet combustion chamber
- Combustion quality is guaranteed by the air flap opening system controlled by the thermostatic valve

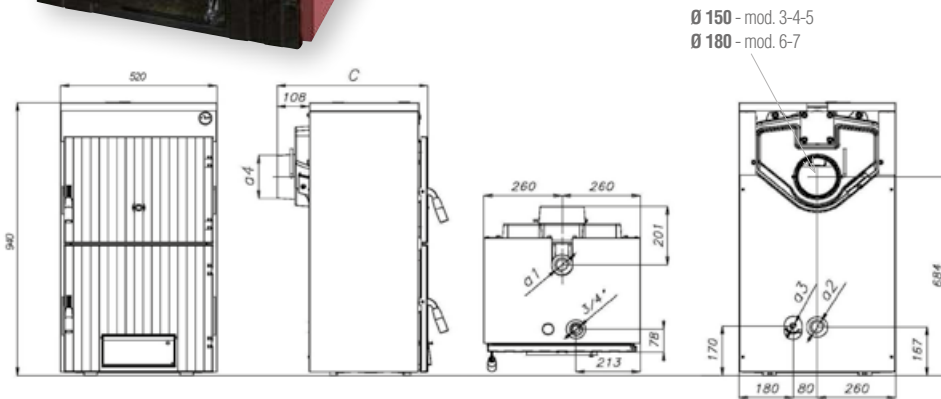

### > TABLE OF COMBINATIONS

| GENERATOR |          | PELLET BURNER |            |          |
|-----------|----------|---------------|------------|----------|
| MODEL     | CODE     | MODEL         | TYPE       | CODE     |
| SFL 3     | 0U2F6DXA | SUN P7 N      | Modulating | 0U2F6DXA |
| SFL 4     | 0U2F6DXA | SUN P7 N      | Modulating | 0U2F6DXA |
| SFL 5     | 0U2F8DXA | SUN P12 N     | Modulating | 0U2F8DXA |
| SFL 6     | 0U2F8DXA | SUN P12 N     | Modulating | 0U2F8DXA |
| SFL 7     | 0U2F8DXA | SUN P12 N     | Modulating | 0U2F8DXA |

| MOD. | C mm | a4 mm | > KEY                                   |
|------|------|-------|---|
| 3    | 510  | 150   | a1 1" 1/2 system flow                   |
| 4    | 620  | 150   | a2 1" 1/2 system return                 |
| 5    | 730  | 150   | a3 1/2" boiler discharge                |
| 6    | 840  | 180   | a4 Flue gas outlet                      |
| 7    | 950  | 180   | a5 3/4" thermostatic adjustment fitting |

| MODEL  |                | 3        | 4        | 5        | 6        | 7        |
|--|----------------|----------|----------|----------|----------|----------|
| ErP Class ***                                    | (Class G - A+) | A+       | A+       | A+       | A+       | A+       |
| Efficiency of heat output (wood)                 | kW             | 19       | 27       | 36       | 43       | 50       |
| Efficiency of heat output (coke)                 | kW             | 22.5     | 32.5     | 42.5     | 52.5     | 63.5     |
| Efficiency of heat output (pellet)               | kW             | 22       | 30       | 36       | 42       | 48       |
| Efficiency class of directive EN 303-5 wood/coke |                | 3        | 3        | 3        | 3        | 3        |
| Efficiency class of directive EN 303-5 pellet    |                | 5        | 5        | 5        | 5        | 5        |
| Number of elements                               | no.            | 3        | 4        | 5        | 6        | 7        |
| Max operating pressure                           | bar            | 4        | 4        | 4        | 4        | 4        |
| Empty weight                                     | Kg             | 193      | 241      | 289      | 337      | 385      |
| CODE   |                | OICJ3TWA | OICJ4TWA | OICJ5TWA | OICJ6TWA | OICJ7TWA |

### CODE DESCRIPTION

|          |   |
|----------|---|
| 032010X0 | SAFETY COIL KIT COMPLETE WITH THERMOSTATIC VALVE FOR 3-ELEMENTS MODEL                   |
| 032011X0 | SAFETY COIL KIT COMPLETE WITH THERMOSTATIC VALVE FOR 4-ELEMENTS MODEL                   |
| 032012X0 | SAFETY COIL KIT COMPLETE WITH THERMOSTATIC VALVE FOR 5-ELEMENTS MODEL                   |
| 032013X0 | SAFETY COIL KIT COMPLETE WITH THERMOSTATIC VALVE FOR 6-ELEMENTS MODEL                   |
| 032014X0 | SAFETY COIL KIT COMPLETE WITH THERMOSTATIC VALVE FOR 7-ELEMENTS MODEL                   |
| 035003X1 | CONVERSION KIT FOR PERMANENT OPERATION WITH PELLET BURNER SUN P7 N (3-4 ELEMENTS)*      |
| 035005X0 | CONVERSION KIT FOR PERMANENT OPERATION WITH PELLET BURNER SUN P12 N (5-6-7 ELEMENTS)*   |
| 035004X0 | CONVERSION KIT FOR WOOD/PELLET BURNER REVERSIBLE OPERATION SUN P7 N (3-4 ELEMENTS)**    |
| 035006X0 | CONVERSION KIT FOR WOOD/PELLET BURNER REVERSIBLE OPERATION SUN P12 N (5-6-7 ELEMENTS)** |
| 033001X0 | SAFETY THERMOSTAT KIT FOR OPERATION WITH PELLET BURNER                                  |

**NB** The "safety coil kit" is mandatory if the boiler runs on wood or coke.  
The "safety thermostat kit" is mandatory if the boiler runs on pellets

(\*) Kit composed of the perforated door and the insulating panel

(\*\*) Kit composed of the perforated door complete with insulation and safety micro-switch

(\*\*\*) Referring to wood burning

# T PELLET HEATING STOVE



## > STRENGTHS:

- Pellet heating stove for combination with domestic heating system
- Heating circuit complete with: high efficiency pump, 8-litre expansion valve, system discharging system and 3-bar safety valve
- Flue gas air intake circuit with variable rpm fan downstream of the burner.  
Set up to channel air extraction outdoors. Three possible flue gas outlets: top, rear or side.
- Equipped with automatic cleaning system of the brazier system/brazier holder. Steel flue gas turbulators with manual cleaning mechanism
- Explosion-proof valve as per standard on the combustion chamber, flame non-return thermostat and pallet level signal sensor. Removable ash collection tray
- In addition to the standard functions of the stove, the standard electronics can manage the main components of a thermal system
- Radio control, for remote control, supplied as per standard.


## > APPROVALS:

- Designed according to standard EN 14785
- ErP A++ class


T 18



T 23

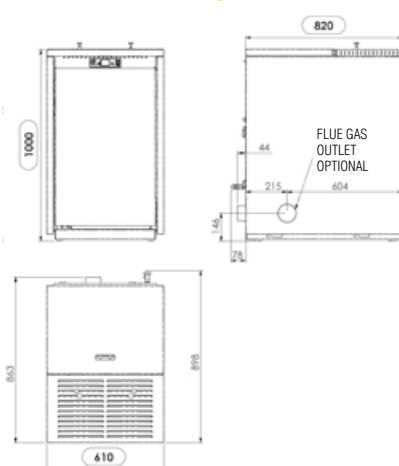

T 29

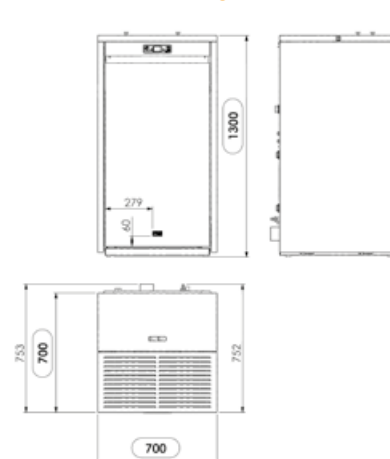

### REMOTE



| T                     |                 | 18               | 23               | 29               |
|-----------------------|-----------------|------------------|------------------|------------------|
| ErP Class             | (Class G - A++) | <b>A++</b>       | <b>A++</b>       | <b>A++</b>       |
| Heat input            | kW              | 20.4 - 5.8       | 24.6 - 7.2       | 27.7 - 8.5       |
| Nominal power         | kW              | 19.0 - 5.5       | 23.0 - 6.8       | 25.7 - 7.9       |
| Heat output to water  | kW              | 17.3 - 4.8       | 21.1 - 6.0       | 24.5 - 7.1       |
| Heat output to air    | kW              | 1.7 - 0.7        | 1.9 - 0.9        | 1.2 - 0.8        |
| Efficiency            | %               | 93.1 - 95.3      | 93.4 - 94.7      | 92.6 - 92.7      |
| Heatable volume *     | m <sup>3</sup>  | 495              | 604              | 700              |
| Flue gas outlet       | Ø mm            | 80               | 80               | 80               |
| Air intake            | Ø mm            | 50               | 50               | 50               |
| Pellet Consumption    | Kg/h            | 4.2 - 1.2        | 5.1 - 1.5        | 5.75 - 1.75      |
| Pellet tank capacity  | Kg              | 30               | 40               | 60               |
| Electric power supply | -               | 230V - 50Hz - 2A | 230V - 50Hz - 2A | 230V - 50Hz - 2A |
| Empty weight          | kg              | 155              | 175              | 206              |
| <b>CODE</b>           | <b>Bordeaux</b> | <b>LS6MA30A</b>  | <b>LS6NA30A</b>  | <b>LS6PS30A</b>  |

\* Based on the insulation status of the home and calculated with 35 W/m<sup>2</sup>

## > ACCESSORIES

### CODE DESCRIPTION

LS9F800B TOUCH SCREEN "UTILITY" CONTROL TIMER



# AT PELLET HEATING STOVE WITH DHW STORAGE




## > STRENGTHS:

- Pellet heating stove for heating and domestic hot water production with 100-litre stainless steel storage tank
- Heating circuit complete with: high efficiency pump, 8-litre expansion valve, system discharging system and 3-bar safety valve
- Flue gas air intake circuit with variable rpm fan downstream of the burner.  
Set up to channel air extraction outdoors. Three possible flue gas outlets: top, rear or side
- Equipped with automatic cleaning system of the brazier system/brazier holder with manual cleaning mechanism
- Explosion-proof valve as per standard on the combustion chamber, flame non-return thermostat. Removable ash collection tray
- Radio control, for remote control, supplied as per standard.

## > APPROVALS:

- Designed according to standard EN 14785
- ErP class A++

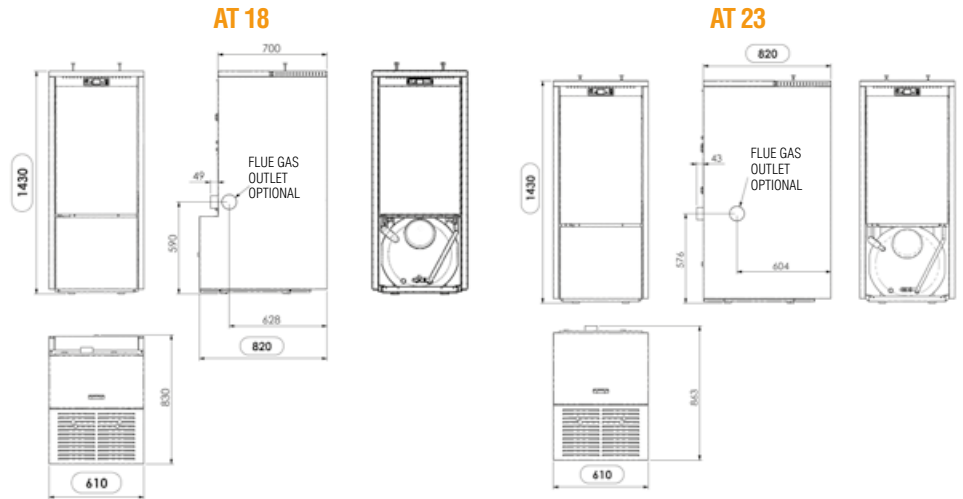

| AT                        |                 | 18               | 23               |
|---------------------------|-----------------|------------------|------------------|
| ErP Class                 | (Class G - A++) | A++              | A++              |
| Heat input                | kW              | 20.4 - 5.8       | 24.6 - 7.2       |
| Nominal power             | kW              | 19.0 - 5.5       | 23.0 - 6.8       |
| Heat output to water      | kW              | 17.3 - 4.8       | 21.1 - 6.0       |
| Heat output to air        | kW              | 1.7 - 0.7        | 1.9 - 0.9        |
| Efficiency                | %               | 93.1 - 95.3      | 93.4 - 94.7      |
| Heatable volume *         | m <sup>3</sup>  | 495              | 604              |
| Flue gas outlet           | Ø mm            | 80               | 80               |
| Air intake                | Ø mm            | 50               | 50               |
| DHW storage tank capacity | lt              | 100              | 100              |
| Pellet Consumption        | Kg/h            | 4.2 - 1.2        | 5.1 - 1.5        |
| Pellet tank capacity      | Kg              | 30               | 40               |
| Electric power supply     |                 | 230V - 50Hz - 2A | 230V - 50Hz - 2A |
| Empty weight              | kg              | 190              | 210              |
| <b>CODE</b>               | <b>Bordeaux</b> | <b>LS6VA30A</b>  | <b>LS6WA30A</b>  |

\* Based on the insulation status of the home and calculated with 35 W/m<sup>3</sup>

## > ACCESSORIES

### CODE DESCRIPTION

L90F800B TOUCH SCREEN "UTILITY" CONTROL TIMER



# WATER HEATERS



## PRODUCT COMPLIANT WITH ERP (ECODESIGN - LABELLING) REGULATIONS

- Minimum efficiency for DHW/heating (of 26/09/2015)
- Minimum efficiency for pump (of 01/08/2015)

### GAS

|                 |     |
|-----------------|-----|
| ZEFIRO ECO      | 100 |
| SKY ECO F       | 101 |
| ZEFIRO          | 103 |
| SKY F           | 104 |
| SKY C "B"       | 106 |
| ARGOS B PLUS 11 | 107 |
| ARGOS           | 108 |


### ELECTRICAL

|                 |     |
|-----------------|-----|
| TITANO SMART BF | 109 |
| TITANO BF       | 110 |
| CALYPSO         | 111 |
| CALYPSO ECO     | 112 |
| CALYPSO MT      | 113 |
| CALYPSO XL      | 114 |
| HE 150-300      | 115 |
| HE 400-500      | 116 |
| BRAVO           | 117 |
| NOVO            | 117 |
| RITA FS DE      | 118 |
| MITO SMD        | 118 |
| AMORE           | 119 |

# ZEFIRO ECO LOW NOx GAS INSTANTANEOUS WATER HEATER

## NATURAL DRAUGHT - OPEN FLUE

ERP

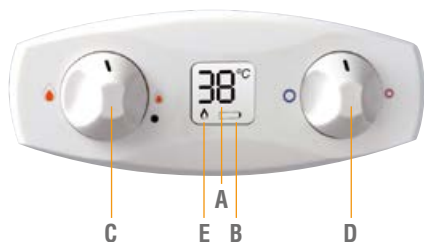

> KEY

- A Display of domestic hot water temperature
- B Battery level signal
- C Burner power/off regulation
- D Temperature regulation
- E Burner on symbol


Gas water heater with open chamber and natural draught, with modulating heat power with emission of **LOW NOx flue gas - Class 6**

> STRENGTHS:


- **Heat exchanger** with copper finned pipes, finished externally with an aluminium rustproof treatment
- **Modulating heat input** and fine regulation of hot water output temperature
- **Display** for easy and prompt reading with operation indicators of the device and battery charge. Power and hot water temperature regulation using comfortable ergonomic **knobs**
- Battery power supply

> ADVANTAGES OF ZEFIRO ECO:

- Product sold in Natural gas and LPG version
- Wide range of hot water **temperature regulation** and **power modulation**
- Compact **size** and reduced weight

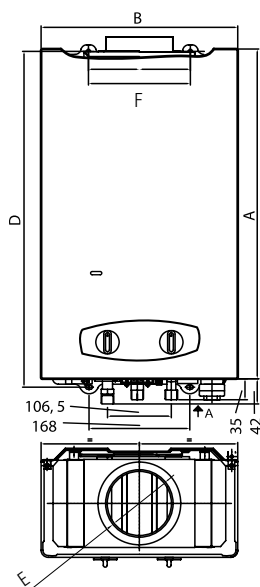


VIEW FROM ABOVE




| DIMENSIONS (mm) | ECO 11 | ECO 14 |
|-----------------|--------|--------|
| A               | 550    | 650    |
| B               | 328    | 400    |
| C               | 181    | 181    |
| D               | 560    | 660    |
| E (ø)           | 110    | 130    |
| F               | 170    | 220    |

> KEY

- 1 hot water output 1/2"
- 2 1/2" gas inlet
- 3 cold water inlet 1/2"




VIEW FROM BELOW



| MODEL                                     |                 |               | ECO 11          | ECO 14          |
|---|-----------------|---------------|-----------------|-----------------|
| ERP Class                                 |                 | (Class G - A) |                 |                 |
| Nominal heat input (Pn)                   |                 | kW            | 21.1            | 26.8            |
| Useful power                              | Min / Max       | kW            | 7.1 / 18.8      | 9.5 / 23.7      |
| NOx Class (according to EN 15502)         |                 |               | 6               | 6               |
| Maximum operating pressure                |                 | bar           | 10              | 10              |
| Domestic hot water production             | Δt 25°C         | l/min         | 11.0            | 13.9            |
|   | Δt 30°C         | l/min         | 9.1             | 11.3            |
| Domestic hot water temperature regulation | Min / Max       | °C            | 40 / 65         | 40 / 65         |
| Power supply                              |                 |               | Battery         | Battery         |
| <b>No. of pieces/pallet</b>               |                 | <b>no.</b>    | <b>20</b>       | <b>20</b>       |
| <b>CODE</b>                               | <b>NAT. GAS</b> |               | <b>GCA1MKAA</b> | <b>GCA1PKAA</b> |
|   | <b>LPG</b>      |               | <b>GCA1MLAA</b> | <b>GCA1PLAA</b> |

# SKY ECO F LOW NOx GAS INSTANTANEOUS WATER HEATER FORCED DRAUGHT - ROOM SEALED

ERP

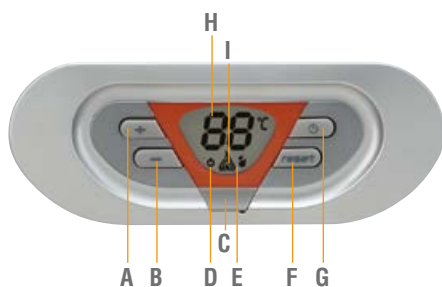

Gas water heater with sealed chamber, modulating heat power and electronic control of combustion with emission of **LOW NOx flue gas - Class 6**

### > STRENGTHS:


- **Heat exchanger** with copper finned pipes, finished externally with an aluminium rustproof treatment
- **ECS (Evolved Combustion System): electronic control of combustion and continuous modulating heat input**, managed continuously by a microprocessor that ensures maximum water heater efficiency according to the thermal load
- **Flue gas output and air inlet** that are set via a coaxial pipe 60/100 mm with double 80 mm pipe (air/flue gas). Supply of full accessories for both solutions
- Ideal for installation both **indoors and outdoors**, in a partially protected place (standard minimum -5°C and down to -15°C with the optional antifrost heating elements kit)
- Simple and intuitive **key controls** to adjust the water temperature and **large display** for easy, prompt reading
- **Set up** to operate with solar panel systems





### > ADVANTAGES OF SKY ECO F:

- Product sold in Natural gas and LPG version
- Wide range of hot water **temperature regulation** and **power modulation**
- Compact **size**, reduced weight and **highly functional internal** layout of the device in order to facilitate maintenance



### > KEY

- A** Key to increase the domestic hot water temperature
- B** Key to decrease the domestic hot water temperature
- C** Service Tool connection
- D** OFF symbol
- E** DHW operation symbol
- F** Reset key
- G** Device on/off key
- H** Multifunction symbol
- I** Burner on symbol and current power level (Flashing during faulty combustion)



| MODEL                                     |   |                 | ECO 11 F  | ECO 14 F  | ECO 17 F  |
|---|---|-----------------|---|---|---|
| ERP Class                                 |  | (Class G - A)   |  |  |  |
| Nominal heat input                        | Max   | kW              | 21.7  | 26.9  | 32.9  |
| Heat output                               | Max / Min   | kW              | 19.5 / 5.5  | 24.2 / 9.37   | 29.6 / 11.47  |
| NOx Class (according to EN 15502)         |   |                 | 6   | 6   | 6   |
| Maximum operating pressure                |   | bar             | 10  | 10  | 10  |
| Maximum DHW production                    | Δt 25°C / Δt 30°C   | l/min           | 11.2 / 9.3  | 13.9 / 11.6   | 17.0 / 14.2   |
| Domestic hot water temperature regulation | Min / Max   | °C              | 40 / 65   | 40 / 65   | 40 / 65   |
| Empty weight                              |   | Kg              | 14  | 15  | 18  |
| Electric power supply                     |   | V/Hz            | 230 / 50  | 230 / 50  | 230 / 50  |
| <b>No. of pieces/pallet</b>               |   | <b>no.</b>      | <b>10</b>   | <b>10</b>   | <b>10</b>   |
| <b>CODE</b>                               |   | <b>NAT. GAS</b> | <b>ODF94IAA</b>   | <b>ODF95IAA</b>   | <b>ODF97IAA</b>   |
|   |   | <b>LPG</b>      | <b>ODF94KAA</b>   | <b>ODF95KAA</b>   | <b>ODF97KAA</b>   |

## SKY ECO F

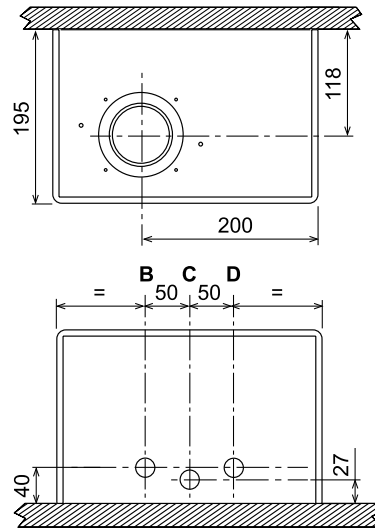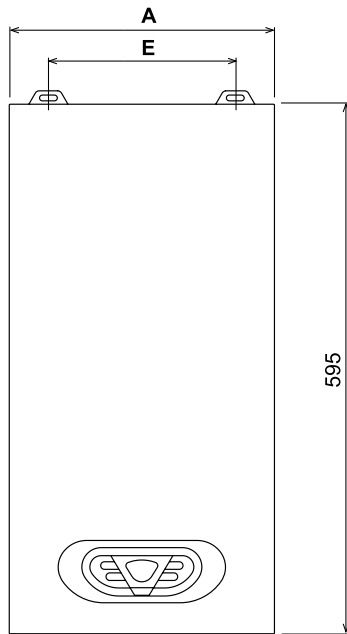

### > KEY

**B** Domestic outlet Ø 1/2"




**C** Gas inlet Ø 3/4"

**D** Domestic inlet Ø 1/2"

| DIMENSIONS  | ECO 11 F | ECO 14 F | ECO 17 F |
|-------------|----------|----------|----------|
| <b>A mm</b> | 295      | 335      | 375      |
| <b>E mm</b> | 210      | 250      | 290      |


## STARTING FLUE ACCESSORIES

| DESCRIPTION  | CODE     |
|--|----------|
|  air/flue gas splitter pipe kit 80/80 mm   | 010031X0 |
|  flanged coupling for vertical coaxial pipe ø 100/60 mm                                    | 010006X0 |
|  complete coaxial flue gas discharge air intake kit ø 60/100 mm, horizontal (L = 1000 mm) | 010012X0 |

| DESCRIPTION  | CODE     |
|--|----------|
|  Coaxial pipe ø 60/100 mm with end and gasket, and inner part made of aluminium; outer part made of plastic Length L = 1000 mm | 1KWMA56A |
|  Male/female coaxial extension ø 60/100 mm complete with gaskets, aluminium internal, plastic external Length L = 1000 mm      | 1KWMA56U |
|  Coaxial bend 90°, ø 60/100 mm, complete with gaskets Package 1 piece  | 1KWMA81W |
|  electric heating elements kit for auxiliary antifrost down to -15°C   | 013009X0 |





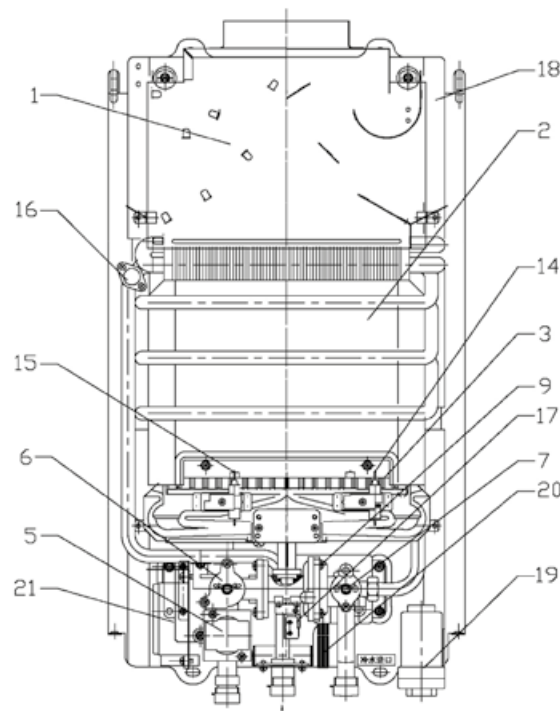

- Power and temperature selector
- Flue gas evacuation control device
- Electronic ignition with flame detection by **ionisation**
- Electronic, **battery** powered, ignition
- **Modulating** gas valve, activation upon double signal
- Output regulation from 40% to 100%
- SOFT START device for **progressive and silent ignition**
- Extremely easy installation and maintenance
- Safety device for protection against insufficient water
- Certified also for operation with **butane** (G30) or **LPG** (G31)




### KEY

- 1 draught diverter
- 2 heat exchanger
- 3 burner
- 5 gas valve
- 6 power adjustment knob
- 7 temperature selector
- 14 ionisation electrode
- 15 ignition electrode
- 16 limit thermostat
- 17 ignition microswitch
- 18 flue gas control device
- 19 battery box
- 20 water relief valve
- 21 control board

| MODEL               |   |       | 5   | 11  | 14  |
|---------------------|---|-------|---|---|---|
| DHW tapping profile |   |       | XS  | M   | M   |
| Erp Class           |  |       |  |  |  |
| Heat input          | Max   | kW    | 10,1  | 21,1  | 26,8  |
|                     | Min   | kW    | 3,6   | 7,1   | 9,3   |
| Heat output         | Max   | kW    | 8,9   | 18,9  | 23,8  |
|                     | Operating pressure  | Max   | bar   | 10  | 10  |
| DHW flow rate       | $\Delta t$ 25°C   | l/min | 5,1   | 10,8  | 13,7  |
|                     | $\Delta t$ 50°C   | l/min | 2,6   | 5,4   | 6,8   |
| DHW set point       | Min   | °C    | 40  | 40  | 40  |
|                     | Max   | °C    | 65  | 65  | 65  |
| Dimensions          | WxHxD   | mm    | 280x455x130   | 328x550x130   | 400x650x181   |
| CODE                |   |       | -   | <b>GCT1MBAA</b>   | <b>GCU1PBAA</b>   |



- Compact heat exchanger made completely of copper
- **Evolved Combustion System:** electronic monitoring of combustion quality, which ensures the best operation depending on the different thermal load and chimney draught
- Steplessly output **modulation** from 36% to 100%
- Simple and intuitive **LCD** interface
- **Ready for connection to solar systems:** can operate in combination with domestic hot water pre-heating systems
- Very **compact** dimensions
- 230V power supply
- Certified also for operation with **butane** (G30) or **LPG** (G31)

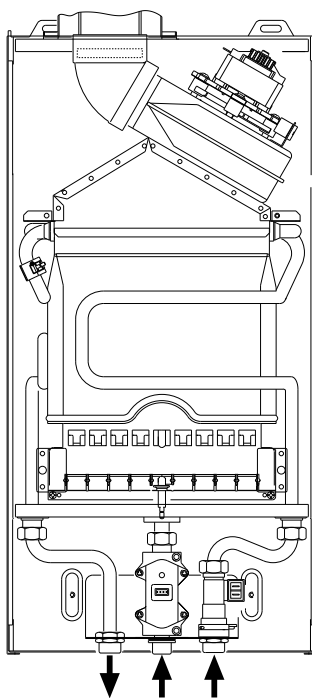


**FLUES ACCESSORIES:**  
please consult section reserved to traditional boilers.

| MODEL              |         |                | F 11            | F 14            | F 17            |
|--------------------|---------|----------------|-----------------|-----------------|-----------------|
| Erp Class          | XL      | (Classe G - A) | <b>A</b>        | <b>A</b>        | <b>A</b>        |
| Heat input         | Min     | kW             | 8,3             | 10,3            | 12,6            |
|                    | Max     | kW             | 21,7            | 26,9            | 32,9            |
| Heat output        | Min     | kW             | 7,1             | 8,8             | 10,7            |
|                    | Max     | kW             | 19,2            | 23,9            | 29,2            |
| Efficiency         |         | Pmax %         | 88,5            | 88,7            | 88,9            |
| Operating pressure | Min     | bar            | 0,20            | 0,20            | 0,20            |
|                    | Max     | bar            | 10              | 10              | 10              |
| DHW flow rate      | Δt 25°C | l/min          | 11,0            | 13,7            | 16,8            |
|                    | Δt 50°C | l/min          | 5,5             | 6,9             | 8,4             |
| Empty weight       |         | kg             | 13              | 14              | 17              |
| Dimensions         | WxHxD   | mm             | 295x595x195     | 335x595x250     | 375x595x290     |
| <b>CODE</b>        |         |                | <b>OAF94IAA</b> | <b>OAF95IAA</b> | <b>OAF97IAA</b> |



## SKY F

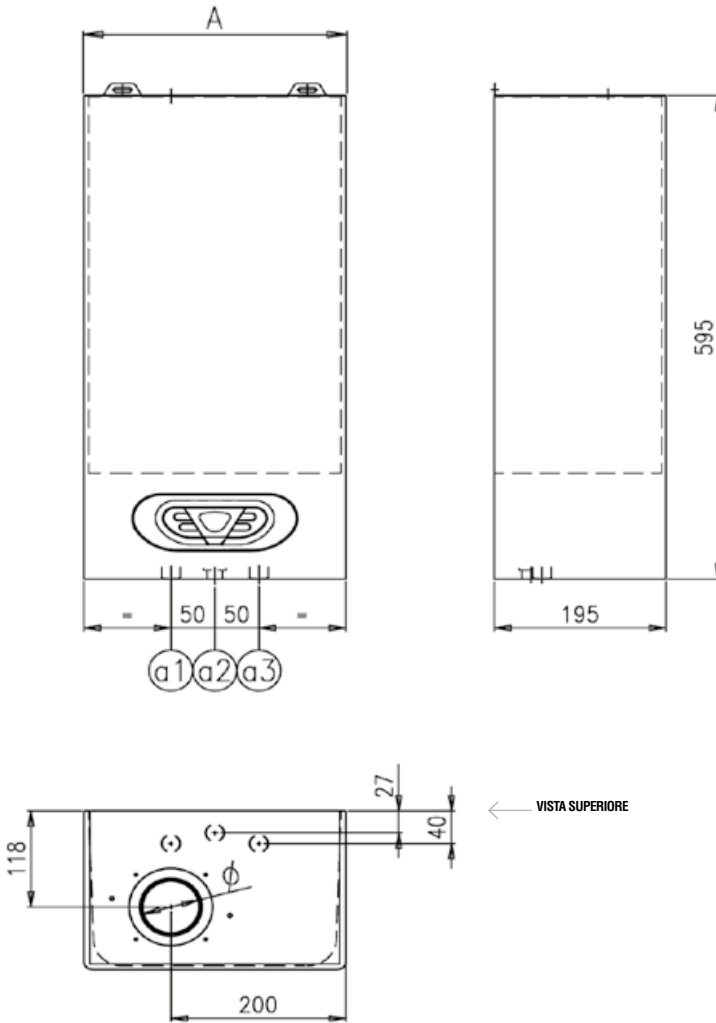

### > LEGENDA

- a1 Domestic outlet Ø 1/2"
- a2 Gas inlet Ø 1/2"
- a3 Domestic inlet Ø 1/2"

| DIMENSIONS  | 11F | 14F | 17F |
|-------------|-----|-----|-----|
| <b>A mm</b> | 295 | 335 | 375 |

## STARTING FLUE ACCESSORIES

| DESCRIPTION  | CODE     |
|--|----------|
|  air/flue gas splitter pipe kit 80/80 mm  | 010031X0 |
|  flanged coupling for vertical coaxial pipe ø 100/60 mm                                   | 010006X0 |
|  complete coaxial flue gas discharge air intake kit ø 60/100 mm, horizontal (L = 1000 mm) | 010012X0 |

| DESCRIPTION  | CODE     |
|--|----------|
|  Coaxial pipe ø 60/100 mm with end and gasket, and inner part made of aluminium; outer part made of plastic Length L = 1000 mm | 1KWMA56A |
|  Male/female coaxial extension ø 60/100 mm complete with gaskets, aluminium internal, plastic external Length L = 1000 mm      | 1KWMA56U |
|  Coaxial bend 90°, ø 60/100 mm, complete with gaskets Package 1 piece  | 1KWMA81W |
|  electric heating elements kit for auxiliary antifrost down to -15°C   | 013009X0 |


# SKY C "B"

## WALL-HUNG INSTANTANEOUS GAS WATER HEATER, OPEN FLUE, BATTERY IGNITION

- Compact heat exchanger made completely of copper, protected by an atoxic aluminium coating, inside a cooled combustion chamber
- **Graphic display** indicating temperature, battery charge level, burner status
- Double knob for **output selection and temperature setting**
- Burner in stainless steel, specially shaped for silent operation
- Wide range of temperature regulation
- Very **compact** dimensions
- Ready for domestic hot water production **in combination with solar collectors systems**
- **Operated by 2 X 1,5V, type «A» batteries**, located in a box easily accessible from the bottom of the water heater
- Certified also for operation with **butane (G30)** or **LPG (G31)**




**PHASING OUT**

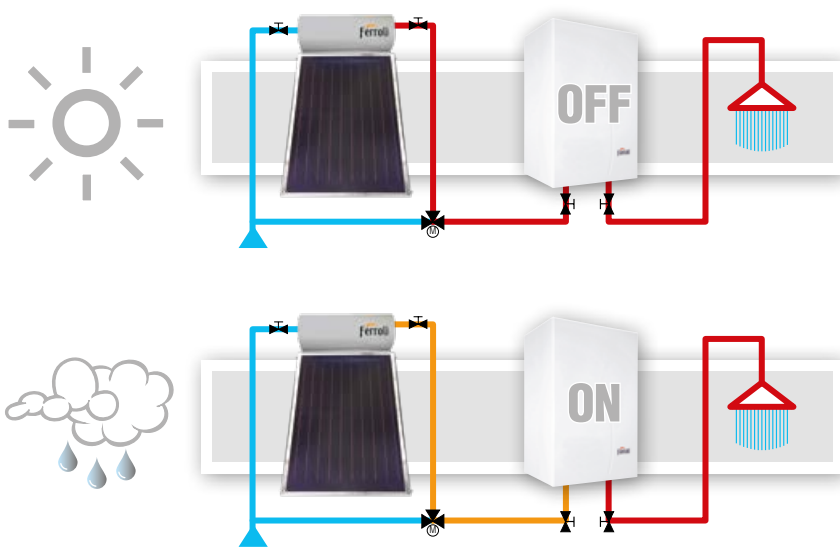

**SOLAR FUNCTION**

SCHEME

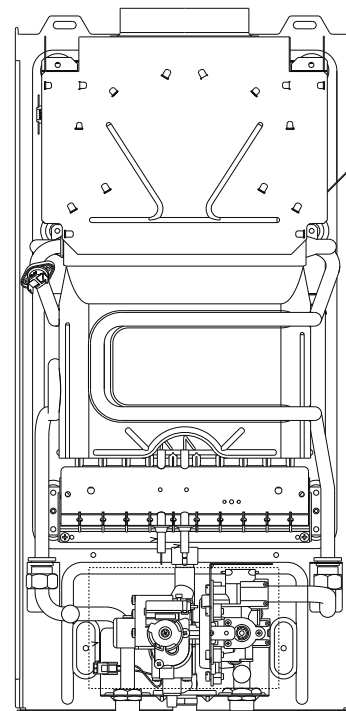

| MODEL         |                  |               | C 11 B          | C 14 B          |
|---------------|------------------|---------------|-----------------|-----------------|
| Erp Class     | M                | (G - A Class) | <b>A</b>        | <b>A</b>        |
| Heat input    | Max              | kW            | 21,7            | 26,9            |
|               | Min              | kW            | 7,1             | 8,8             |
| Heat output   | Max              | kW            | 19,2            | 23,9            |
|               | Working pressure | Max           | bar             | 10              |
| DHW flow rate | $\Delta t$ 25°C  | l/min         | 11              | 14              |
|               | $\Delta t$ 50°C  | l/min         | 5,5             | 6,8             |
| DHW set point | Min              | °C            | 40              | 40              |
|               | Max              | °C            | 65              | 65              |
| Empty weight  |                  | kg            | 11              | 12              |
| Dimensions    | WxHxD            | mm            | 295x595x195     | 335x595x195     |
| <b>CODE</b>   |                  |               | <b>OAF641AA</b> | <b>OAF651AA</b> |


# ARGOS B PLUS 11

## WALL-HUNG INSTANTANEOUS GAS WATER HEATER, OPEN FLUE, BATTERY IGNITION



- Very **compact** dimensions
- Compact heat exchanger made completely of copper, protected by an atoxic aluminium coating, inside a cooled combustion chamber
- Wide range of temperature regulation
- Certified also for operation with **butane** (G30) or **LPG** (G31)
- **Graphic display** indicating temperature, battery charge level, burner status
- **Operated by 2 X 1,5V, type «A» batteries**, located in a box easily accessible from the bottom of the water heater
- Double knob for **output selection and temperature setting**
- Burner in stainless steel, specially shaped for silent operation
- Ready for domestic hot water production **in combination with solar collectors systems**

SCHEME

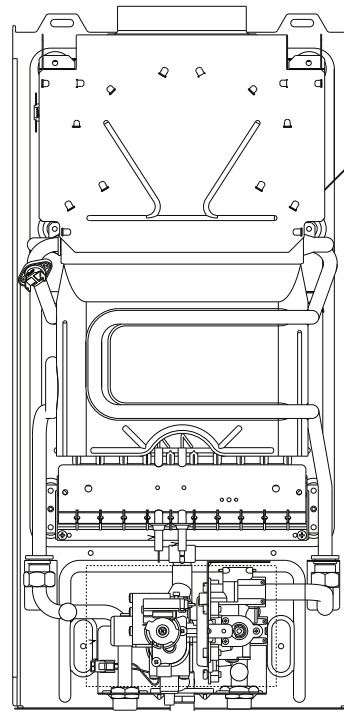


| MODEL            |                 |       | C 11 B      |
|------------------|-----------------|-------|-------------|
| Erp Class        | (G - A Class)   |       |             |
| Heat input       | Max             | kW    | 21,7        |
| Heat output      | Min             | kW    | 7,1         |
|                  | Max             | kW    | 19,2        |
| Working pressure | Max             | bar   | 10          |
| DHW flow rate    | $\Delta t$ 25°C | l/min | 11          |
|                  | $\Delta t$ 50°C | l/min | 5,5         |
| DHW set point    | Min             | °C    | 40          |
|                  | Max             | °C    | 65          |
| Empty weight     |                 | kg    | 11          |
| Dimensions       | WxHxD           | mm    | 295x595x195 |

# ARGOS GAS WATER HEATER WITH PILOT FLAME



- **Burner.** To adapt it to different gases, it is sufficient to exchange the injectors. (With stainless steel heads specially designed for the combustion of butane/propane and natural gases)
- Piezoelectric front igniter
- Temperature and power selector switch
- **Special hydraulic arrangement.** It automatically activates the water heating mechanisms whenever a hot water tap is opened. It is also SAFE, since it opens the passage of gas to the burner only when water flows through the heat exchanger.
- **Built-in flue draught extractor.** It ensures a correct combustion, whatever the variation of the draught in the exhaust duct (chimney). A safety device stops the unit in the event of abnormal flue evacuation.
- **Ignition safety valve.** Thermo-electric system, which allows the gas to flow in the burner only when the pilot flame is ignited.
- Automatic water flow regulator
- Flexible hot water connection

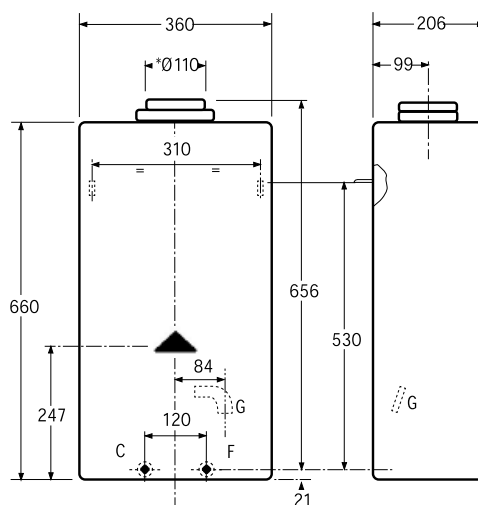

- C** Hot water outlet: R 1/2".
- F** Cold water inlet: R 1/2".
- G1** Butane/propane inlet: Ø 12 mm ext.
- G2** Natural gas inlet: Ø 12 mm ext.
- \* Ø Interior Ø

| MODÈLE                     |                  |       | 5           | 10          |
|----------------------------|------------------|-------|-------------|-------------|
| Nominal consumption        | Nominal          | kW    | 10          | 20,7        |
| Useful power               | Nominal          | kW    | 8,29        | 17,4        |
| Water flow and temperature | 40°C (ΔT = 25°C) | l/min | 4,8         | 10          |
|                            | 65°C (ΔT = 50°C) | l/min | 2,4         | 5           |
| Maximum water pressure     |                  | bar   | 10          | 10          |
| Dimensions                 | LxHxP            | mm    | 248x588x206 | 360x660x206 |

# TITANO SMART BF

ERP



## MID CAPACITY ELECTRIC WATER HEATERS ENERGY SAVER

Electrical water heaters with extremely high efficiency storage, vertical and horizontal configuration with **50 to 150-litre capacity**.

### > EQUIPPED WITH:

- "SMART" electronic control able to optimise consumption according to user requirements
- Control panel with **LED lights** for reading the operating temperatures and operating status and convenient **keys** for managing the water heater
- Ultra high performing "**Blue Forever**" electrical heating elements featuring a special surface treatment that almost entirely reduces limescale build-up on the element for optimal operation over time
- Magnesium anode tank protection
- **5-bolt** flange to guarantee sturdiness and easy periodic maintenance
- Safety valve calibrated to 8 bar
- Supplied with three-pole electric cable without plug

### VERSIONS:

**VE** - vertical, **HO** - horizontal  
CABLE / PLUG as option  
Elements: 0.8 - 2 kW



### > KEY

- Status signal LED:  
Green LED: Electrically powered storage tank  
Red LED: Storage tank in DHW production  
Flashing green LED: Antilegionella
- On /Off switch
- Parameter decrease key
- DHW temperature indicator LED
- Parameter increase key
- SMART mode activation key
- SMART mode indicator LED (red)



| MODEL                     |               | 50 SVE BF | 80 SVE BF | 100 SVE BF | 120 SVE BF | 150 SVE BF | 50 SHO BF | 80 SHO BF | 100 SHO BF | 120 SHO BF | 150 SHO BF |
|---------------------------|---------------|-----------|-----------|------------|------------|------------|-----------|-----------|------------|------------|------------|
| Load profile              |               | M         | M         | M          | L          | L          | M         | M         | M          | L          | L          |
| ERP Class                 | (Class G - A) | <b>B</b>  | <b>B</b>  | <b>B</b>   | <b>C</b>   | <b>C</b>   | <b>B</b>  | <b>B</b>  | <b>B</b>   | <b>C</b>   | <b>C</b>   |
| Tank capacity             | l             | 50        | 78        | 100        | 120        | 130        | 50        | 78        | 100        | 120        | 130        |
| Electrical power          | W             | 1500      | 1500      | 1500       | 1500       | 1500       | 1200      | 1200      | 1500       | 1500       | 1500       |
| Heating time              | 20+55°C       | 1 h 26'   | 2 h 18'   | 2 h 53'    | 3 h 28'    | 4 h 19'    | 1 h 26'   | 2 h 18'   | 2 h 53'    | 3 h 28'    | 4 h 19'    |
| Mixed water at 40°C (V40) | l             | 65        | 120       | 160        | 235        | 240        | 68        | 120       | 160        | 220        | 230        |
| Height VE / Width HO      | mm            | 555       | 755       | 995        | 1130       | 1175       | 565       | 640       | 755        | 995        | 1130       |
| Max diameter              | mm            | 438       | 438       | 438        | 438        | 438        | 438       | 438       | 438        | 438        | 438        |
| Empty weight              | Kg            | 14        | 19        | 22         | 35         | 35         | 14        | 19        | 22         | 35         | 35         |

# TITANO BF MID CAPACITY ELECTRIC WATER HEATER



- Temperature control by mechanical thermostat
- High-concentration magnesium anode to protect the tank
- **Five bolt flange** to ensure sturdiness and easy periodical maintenance
- Unbreakable thermometer in ABS
- On/off light
- Pressure relief valve set to 8 bars
- Manual outside **temperature adjustment** (vertical model)
- **"Blue Forever"** heating element. Its surface is treated through a special patented process, which permits drastical reduction of limestone deposits

## BLUE FOREVER THE SCALING ENEMY

The element is enameled with Bluesilicon, a unique patented treatment, offering extra qualities such as:

- Drastically reducing the limestone deposit, which substantially shortens the life span of the element
- Top efficiency of the element for a longer period
- Maintaining the high performance throughout the life span of the element
- Extended Ferrol warranty on the element

### VERSIONS:

*VE - vertical, HO - horizontal*

*CABLE / PLUG as option*

*Elements: 0.8 - 2 kW*

### LONG TERM TEST

Standard element



BLUE FOREVER element



FERROLI PATENT



| VERTICAL EXECUTION  |                 |         | 50 VE/RE | 80 VE/RE | 100 VE/RE | 120 VE/RE | 150 VE/RE |
|---------------------|-----------------|---------|----------|----------|-----------|-----------|-----------|
| DHW tapping profile |                 |         | M        | L        | L         | L         | L         |
| ERP Class           | (G - A Class)   |         | <b>C</b> | <b>C</b> | <b>C</b>  | <b>C</b>  | <b>C</b>  |
| Capacity            |                 | litres  | 50       | 80       | 100       | 120       | 150       |
| Power               |                 | W       | 1500     | 1500     | 1500      | 1500      | 1500      |
| Heating time        | $\Delta T$ 35°C | minutes | 1 h 26'  | 2 h 18'  | 2 h 53'   | 3 h 28'   | 4 h 19'   |
|                     | $\Delta T$ 45°C | minutes | 1 h 51'  | 2 h 58'  | 3 h 42'   | 4 h 27'   | 5 h 34'   |
| Weight              |                 | Kg      | 16       | 20,5     | 25        | 28,5      | 29,5      |

| HORIZONTAL EXECUTION |                 |         | 50 HO    | 80 HO    | 100 HO   | 120 HO   | 150 HO   |
|----------------------|-----------------|---------|----------|----------|----------|----------|----------|
| DHW tapping profile  |                 |         | M        | M        | L        | L        | L        |
| ERP Class            | (G - A Class)   |         | <b>C</b> | <b>C</b> | <b>C</b> | <b>C</b> | <b>C</b> |
| Capacity             |                 | litres  | 50       | 80       | 100      | 120      | 150      |
| Power                |                 | W       | 1500     | 1500     | 1500     | 1500     | 1500     |
| Heating time         | $\Delta T$ 35°C | minutes | 1 h 26'  | 2 h 18'  | 2 h 53'  | 3 h 28'  | 4 h 19'  |
|                      | $\Delta T$ 45°C | minutes | 1 h 51'  | 2 h 58'  | 3 h 42'  | 4 h 27'  | 5 h 34'  |
| Weight               |                 | Kg      | 16       | 20,5     | 25       | 28,5     | 29,5     |

# CALYPSO

## MID CAPACITY ELECTRIC WATER HEATER




- **Five bolt flange** of wide diameter, to ensure sturdiness and easy periodical maintenance
- Various models with capacity from 50 to 150 litres, both vertical and horizontal
- Five bolts flange element
- Temperature control through mechanical thermostat with probe
- Magnesium anode to protect the tank
- Temperature level indicator
- On/off light indicator
- Pressure relief valve set to 8 bar
- Manual external **temperature adjustment** (vertical model)

### VERSIONS:

**VE** - vertical, **HO** - horizontal


**CABLE / PLUG** as option

**Elements:** 0.8 - 4 kW - copper/stainless steel

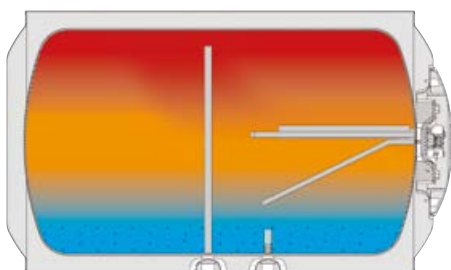

▲ **HORIZONTAL**  
Recommended in confined spaces like false ceilings

▶ **VERTICAL**  
Maximum stratification. Withdrawal of hot water from the warmest point in the tank

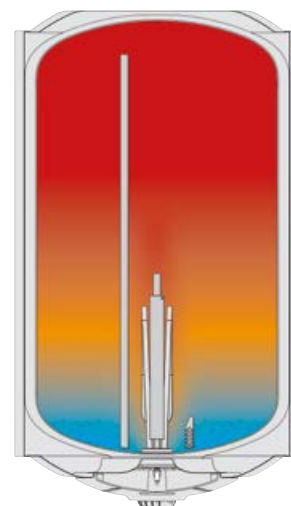

| VERTICAL EXECUTION  |                  |         | 50 VE/RE | 80 VE/RE | 100 VE/RE | 120 VE/RE | 150 VE/RE |
|---------------------|------------------|---------|----------|----------|-----------|-----------|-----------|
| DHW tapping profile |                  |         | M        | L        | L         | L         | L         |
| ERP Class           | (G - A Class)    |         | <b>C</b> | <b>C</b> | <b>C</b>  | <b>C</b>  | <b>C</b>  |
| Capacity            |                  | litres  | 50       | 80       | 100       | 120       | 150       |
| Power               |                  | W       | 1500     | 1500     | 1500      | 1500      | 1500      |
| Heating time        | $\Delta T$ 35° C | minutes | 1 h 26'  | 2 h 18'  | 2 h 53'   | 3 h 28'   | 4 h 19'   |
|                     | $\Delta T$ 45° C | minutes | 1 h 51'  | 2 h 58'  | 3 h 42'   | 4 h 27'   | 5 h 34'   |
| Weight              |                  | Kg      | 16       | 20,5     | 25        | 28,5      | 29,5      |

| HORIZONTAL EXECUTION |                  |         | 50 HO    | 80 HO    | 100 HO   | 120 HO   | 150 HO   |
|----------------------|------------------|---------|----------|----------|----------|----------|----------|
| DHW tapping profile  |                  |         | M        | M        | L        | L        | L        |
| ERP Class            | (G - A Class)    |         | <b>C</b> | <b>C</b> | <b>C</b> | <b>C</b> | <b>C</b> |
| Capacity             |                  | litres  | 50       | 80       | 100      | 120      | 150      |
| Power                |                  | W       | 1500     | 1500     | 1500     | 1500     | 1500     |
| Heating time         | $\Delta T$ 35° C | minutes | 1 h 26'  | 2 h 18'  | 2 h 53'  | 3 h 28'  | 4 h 19'  |
|                      | $\Delta T$ 45° C | minutes | 1 h 51'  | 2 h 58'  | 3 h 42'  | 4 h 27'  | 5 h 34'  |
| Weight               |                  | Kg      | 16       | 20,5     | 25       | 28,5     | 29,5     |

# CALYPSO ECO

## MID CAPACITY ELECTRIC WATER HEATER



- The element is **screw-fixed** together with the magnesium anode, to the tank
- Various models with capacity from 50 to 150 litres, both vertical and horizontal
- Container internally enameled with Titanium Bluesilicon process
- Temperature level indicator
- On/off light indicator
- Pressure relief valve set to 8 bar

### VERSIONS:

**VE** - vertical, **HO** - horizontal

**CABLE / PLUG** as option

**Elements:** 0.8 - 4 kW - copper/stainless steel

### REGULATION

**INTERNAL** Through the internal knob, removing the plastic cover. It is however factory pre-set in order to get maximum possible efficiency (EU regulation 812/2013). A proper setting ensures a high water flow at mixed 40°C temperature. Factory adjustment depends on volume and execution of the heater. 60°C preset on VG 100÷150 and HO 80, 70°C on the others.



| VERTICAL EXECUTION  |                  |         | 50 VG    | 80 VG    | 100 VG   | 120 VG   | 150 VG   |
|---------------------|------------------|---------|----------|----------|----------|----------|----------|
| DHW tapping profile |                  |         | M        | L        | L        | L        | L        |
| ERP Class           | (G - A Class)    |         | <b>C</b> | <b>C</b> | <b>C</b> | <b>C</b> | <b>C</b> |
| Capacity            |                  | litres  | 50       | 80       | 100      | 120      | 150      |
| Power               |                  | W       | 1500     | 1500     | 1500     | 1500     | 1500     |
| Heating time        | $\Delta T$ 35° C | minutes | 1 h 26'  | 2 h 18'  | 2 h 53'  | 3 h 28'  | 4 h 19'  |
|                     | $\Delta T$ 45° C | minutes | 1 h 51'  | 2 h 58'  | 3 h 42'  | 4 h 27'  | 5 h 34'  |
| Weight              |                  | Kg      | 16       | 20,5     | 25       | 28,5     | 29,5     |

| HORIZONTAL EXECUTION |                  |         | 50 HO    | 80 HO    | 100 HO   | 120 HO   | 150 HO   |
|----------------------|------------------|---------|----------|----------|----------|----------|----------|
| DHW tapping profile  |                  |         | M        | M        | L        | L        | L        |
| ERP Class            | (G - A Class)    |         | <b>C</b> | <b>C</b> | <b>C</b> | <b>C</b> | <b>C</b> |
| Capacity             |                  | litres  | 50       | 80       | 100      | 120      | 150      |
| Power                |                  | W       | 1500     | 1500     | 1500     | 1500     | 1500     |
| Heating time         | $\Delta T$ 35° C | minutes | 1 h 26'  | 2 h 18'  | 2 h 53'  | 3 h 28'  | 4 h 19'  |
|                      | $\Delta T$ 45° C | minutes | 1 h 51'  | 2 h 58'  | 3 h 42'  | 4 h 27'  | 5 h 34'  |
| Weight               |                  | Kg      | 16       | 20,5     | 25       | 28,5     | 29,5     |



# CALYPSO MT



## MID CAPACITY ELECTRIC WATER HEATER WITH AUXILIARY COIL

- **Multi-energy** water heater: includes a **copper** electric heating element and **coil** for indirect heating from an external source
- Electric or auxiliary heating can operate individually or simultaneously
- Horizontal execution or vertical one, the latter available with 2 or 6 coils exchanger
- High-concentration magnesium anode to protect the tank
- **Five bolt flange to ensure sturdiness and easy periodical maintenance**
- Pressure relief valve set to 8 bar
- Manual outside temperature adjustment (vertical model)
- Hydraulic connections for auxiliary heating can be on the right or left side of the appliance
- Combined heating system through electric heater and auxiliary coil represent the quickest solution to heat DHW
- Mixed water heater is a flexible solution, which permits the user to choose, in **winter period**, **between quick combined operation, or economic mode exploiting only the auxiliary coil, fed by an external heating source**

### VERSIONS:

**VE** - vertical, **HO** - horizontal

**CABLE / PLUG** as option

**Elements:** 0.8 - 4 kW - copper/stainless steel

| CALYPSO MT           | Mod.           | VERTICAL 2 COILS |          |          |          | VERTICAL 6 COILS EXCHANGER |          |          |          |
|----------------------|----------------|------------------|----------|----------|----------|----------------------------|----------|----------|----------|
|                      |                | 80               | 100      | 120      | 150      | 80                         | 100      | 120      | 150      |
| DHW tapping profile  |                | M                | L        | L        | L        | L                          | M        | M        | L        |
| ERP Class            | (G - A Class)  | <b>C</b>         | <b>C</b> | <b>C</b> | <b>C</b> | <b>C</b>                   | <b>C</b> | <b>C</b> | <b>C</b> |
| Capacity             | litres         | 80               | 100      | 120      | 150      | 80                         | 100      | 120      | 150      |
| Coil surface         | m <sup>2</sup> | 0,15             | 0,15     | 0,15     | 0,15     | 0,4                        | 0,4      | 0,4      | 0,4      |
| Electric power       | W              | 1500             | 1500     | 1500     | 1500     | 1500                       | 1500     | 1500     | 1500     |
| Heating time ΔT 35°C | electric       | 2 h 18'          | 2 h 53'  | 3 h 28'  | 4 h 19'  | 2 h 18'                    | 2 h 53'  | 3 h 28'  | 4 h 02'  |
|                      | thermic        | 59'              | 1 h 14'  | 1 h 29'  | 2 h 10'  | 21'                        | 26'      | 31'      | 39'      |
| Weight               | kg             | 24               | 28,5     | 32       | 33       | 26,5                       | 31       | 34,5     | 35,5     |

| CALYPSO MT           | Mod.           | HORIZONTAL 2 COILS EXCHANGER |          |          |          |
|----------------------|----------------|------------------------------|----------|----------|----------|
|                      |                | 80                           | 100      | 120      | 150      |
| DHW tapping profile  |                | M                            | L        | L        | L        |
| ERP Class            | (G - A Class)  | <b>C</b>                     | <b>C</b> | <b>C</b> | <b>C</b> |
| Capacity             | litres         | 80                           | 100      | 120      | 150      |
| Coil surface         | m <sup>2</sup> | 0,15                         | 0,15     | 0,15     | 0,15     |
| Electric power       | W              | 1500                         | 1500     | 1500     | 1500     |
| Heating time ΔT 35°C | electric       | 2 h 18'                      | 2 h 53'  | 3 h 28'  | 4 h 19'  |
|                      | thermic        | 59'                          | 1 h 14'  | 1 h 29'  | 2 h 10'  |
| Weight               | kg             | 20,5                         | 25       | 28,5     | 29,5     |

# CALYPSO XL

## ELECTRICAL WATER HEATERS COMMERCIAL RANGE

ERP




CALYPSO XL covers the needs of big residential plants or commercial applications for collective leisure, restauration, lodging facilities.

- Copper element
- Range: Model 200 litres - vertical / horizontal
- Internal regulation
- Setpoint temperature can be modified through the internal knob, removing the plastic cover.
- It is however factory pre-set in order to get maximum possible efficiency according to European regulation 812/2013.
- A proper setting ensures a high water flow at mixed 40°C temperature.
- Vertical model is adjusted at 70°C whereas the horizontal one at 60°C
- Oversize thermal insulation (33 mm)
- 5 bolts flange

### VERSIONS:

**VE** - vertical, **HO** - horizontal  
**CABLE / PLUG** as option

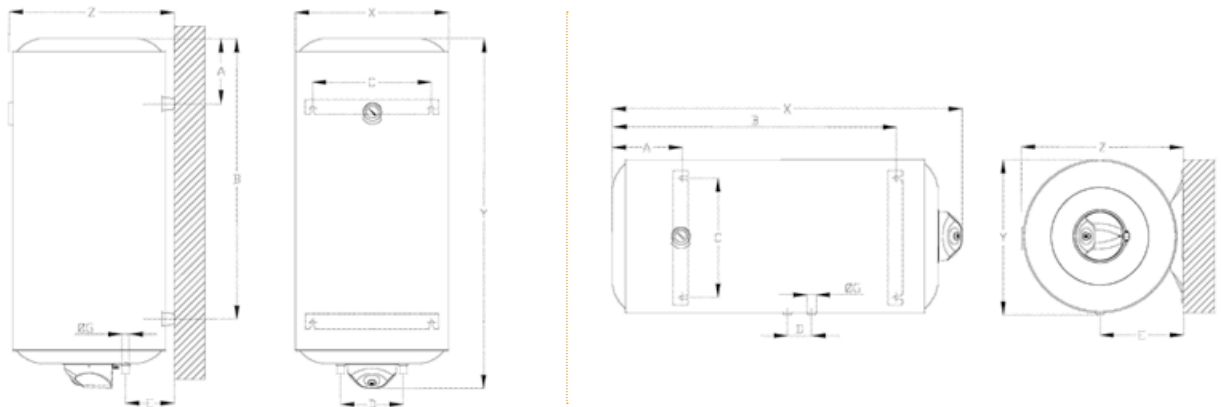

| WALL-HUNG EXECUTION      |         |         | 200 V   | 200 H   |
|--------------------------|---------|---------|---------|---------|
| Dimensions               | X       | mm      | 565     | 1253    |
|                          | Y       | mm      | 1253    | 565     |
|                          | Z       | mm      | 592     | 592     |
|                          | A       | mm      | 195     | 195     |
|                          | B       | mm      | 1035    | 1035    |
|                          | C       | mm      | 440     | 265     |
|                          | D       | mm      | 230     | 140     |
|                          | E       | mm      | 175     | 310     |
|                          | F       | mm      | -       | 595     |
|                          | G       | inches  | 3/4"    | 3/4"    |
| Capacity                 |         | litres  | 200     | 200     |
| Power (standard element) |         | W       | 2400    | 2400    |
| Heating time             | ΔT 35°C | minutes | 3 h 36' | 3 h 36' |
|                          | ΔT 45°C | minutes | 4 h 38' | 4 h 38' |
| Weight                   |         | Kg      | 51      | 51      |

# HE 150-300


## BIG CAPACITY EHW SINGLE TANK FLOOR STANDING 1 SERIES



- Capacity: 150, 200, 300L
- Power
  - 150L** (1.5 kW) (Floor standing)
  - 200L** (3 kW) (Floor standing)
  - 300L** (4 kW) (Floor standing)
- Interface: thermometer
- Control: product body control

### MAIN FEATURES

- High efficiency stainless steel heating element
- Health blue silicon coating
- Glasslined tank
- Large and double magnesium anode
- Unique design of Mg installation
- Drain pipe
- Extra TP valve (optional)
- Power indicate led
- Temperature setting

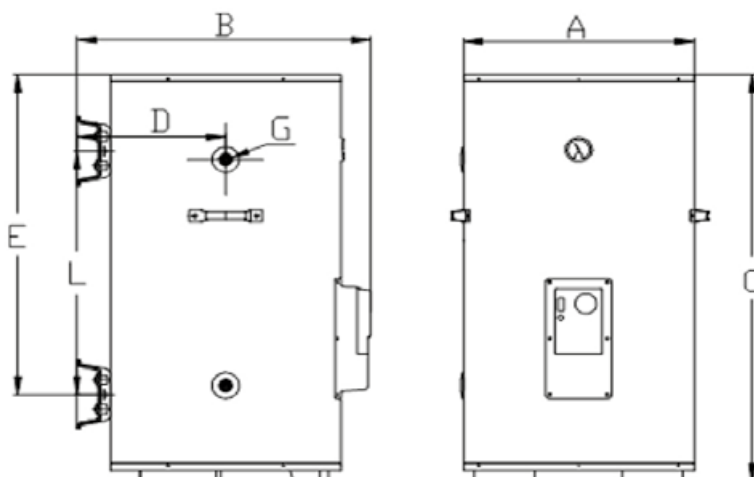

| MODELS | Litres<br>lt | Product dimensions (mm) |     |      |     |     |      |        |   | Net weight<br>kg | Gross weight<br>kg | Carton box dimension<br>mm | 20 GP<br>PCS | 40 GP<br>PCS |
|--------|--------------|-------------------------|-----|------|-----|-----|------|--------|---|------------------|--------------------|----------------------------|--------------|--------------|
|        |              | A                       | B   | C    | D   | E   | F    | G      | H |                  |                    |                            |              |              |
| HE-150 | 150          | ø 581                   | 664 | 875  | 258 | 220 | 385  | G 3/4" | - | 52               | 58                 | 684 x 684 x 925            | 68           | 180          |
| HE-200 | 200          | ø 581                   | 664 | 1095 | 258 | 220 | 605  | G 3/4" | - | 60               | 68.0               | 684 x 684 x 1145           | 48           | 119          |
| HE-300 | 300          | ø 581                   | 664 | 1525 | 258 | 220 | 1035 | G 3/4" | - | 76               | 86.0               | 684 x 684 x 1574           | 35           | 75           |

| MODEL           |          | HE-150   | HE-200          | HE-300   |
|-----------------|----------|----------|-----------------|----------|
| Capacity        | lt       | 150      | 200             | 300      |
| Heating element | W        | 3000     | 3000            | 5000     |
|                 | material |          | stainless steel |          |
| Thermostat      | -        |          | capillary       |          |
| Power cable     | -        |          | no              |          |
| CODE            |          | GRA3000A | GRA4300A        | GRA6300A |

# HE 400-500


## BIG CAPACITY EHW HALF AND FULL TANK HEATING



- Capacity: 400, 500L (Floor standing)
- Power: 3 kW + 3 kW
- Interface: thermometer
- Control: product body control

### MAIN FEATURES

- Half and full tank heating, via single or double element operation
- 50 mm insulating layer
- High efficiency stainless steel heating element
- Health blue silicon coating
- Glasslined tank
- Large and double magnesium anode
- Unique design of mg installation
- Drain pipe
- Extra TP valve (optional)
- Power indicate led
- Temperature setting

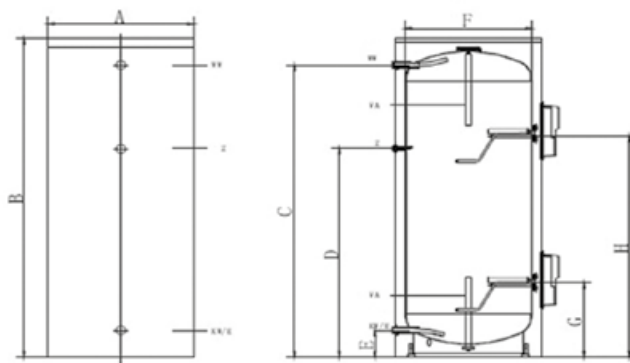

| MODELS | Litres | Product dimensions (mm) |      |      |      |     |     |     |      | Net weight | Gross weight | Carton box dimension | 20 GP | 40 GP |
|--------|--------|-------------------------|------|------|------|-----|-----|-----|------|------------|--------------|----------------------|-------|-------|
|        | lit    | A                       | B    | C    | D    | E   | F   | G   | H    | kg         | kg           | mm                   | PCS   | PCS   |
| HE-400 | 400    | ø 750                   | 1469 | 1319 | 930  | 148 | 650 | 410 | 930  | 81         | 145.0        | 833 x 833 x 1590     | 14    | 28    |
| HE-500 | 500    | ø 750                   | 1769 | 1619 | 1236 | 148 | 650 | 410 | 1236 | 102        | 169.0        | 833 x 833 x 1890     | 14    | 28    |

| MODEL           |          | HE-400          | HE-500   |
|-----------------|----------|-----------------|----------|
| Capacity        | lit      | 400             | 500      |
| Heating element | W        | 3000            | 3000     |
|                 | material | stainless steel |          |
| Thermostat      | -        | capillary       |          |
| Power cable     | -        | no              |          |
| CODE            |          | GRA7400A        | GRA8400A |

## BRAVO ELECTRICAL WATER HEATERS SMALL LITRE CAPACITY

ERP



- Range of 5 models with 10, 15 and 30 litre capacities
- 10 and 15-litre models available in versions for installation over and under the sink

### > EQUIPPED WITH:

- Stainless steel electrical heating elements
- Glass-porcelain storage tank
- Magnesium anode buffer protection
- External temperature regulator
- Plastic external casing
- Capillary temperature-control thermostat

\* **UNDER SINK**

| MODEL             |               | SN 10    | SN 10 S* | SN 15    | SN 15 S* | SN 30    |
|-------------------|---------------|----------|----------|----------|----------|----------|
| Load profile      |               | XXS      | XXS      | XXS      | XXS      | S        |
| ERP Class         | (Class G - A) | <b>B</b> | <b>B</b> | <b>B</b> | <b>B</b> | <b>C</b> |
| Tank capacity     | l             | 10       | 10       | 15       | 15       | 30       |
| Electrical power  | W             | 1500     | 1500     | 1500     | 1500     | 1500     |
| Heating time      | 20+55°C       | 24min    | 25min    | 35min    | 35min    | 68min    |
| Protection rating | IP            | 24       | 24       | 24       | 24       | 24       |
| Empty weight      | Kg            | 6.5      | 6.5      | 7.8      | 7.8      | 11.5     |

## NOVO ELECTRICAL WATER HEATERS SMALL LITRE CAPACITY

ERP



- Range composed of 2 models with 5 and 10-litre capacity both available in versions over and under-sink

### > EQUIPPED WITH:

- Stainless steel electrical heating elements
- Glass-porcelain storage tank
- Magnesium anode buffer protection
- External temperature regulator with LED reporting when the set-point is reached
- Capillary temperature-control thermostat

\* **UNDER SINK**

| MODEL            |               | 5        | 5 S*     | 10       | 10 S*    |
|------------------|---------------|----------|----------|----------|----------|
| Load profile     |               | XXS      | XXS      | XXS      | XXS      |
| ERP Class        | (Class G - A) | <b>B</b> | <b>B</b> | <b>B</b> | <b>B</b> |
| Tank capacity    | l             | 5        | 5        | 10       | 10       |
| Electrical power | W             | 2000     | 2000     | 2000     | 2000     |
| Heating time     | 20+55°C       | 10min    | 10min    | 19min    | 19min    |
| Empty weight     | Kg            | 4.5      | 4.5      | 6.5      | 6.5      |

# RITA FS DE

## INSTANTANEOUS ELECTRIC WATER HEATER



- Red copper heating element, inside glassfiber box
- Power level automatically managed by temperature sensor and PCB
- Lcd indicates shower duration, advises flow reduction need, advises shower head cleaning
- Overheating protection
- Self diagnosis
- Hidden electric installation
- Range: 3,0 kW / 5,0 kW / 7,5 kW / 8,5 kW / 10,0 kW / 12,0 kW

| MODEL                       | RITA FS DE              |
|-----------------------------|-------------------------|
| Power                       | 220 ~ 240 Vac, 50/60 Hz |
| Protection                  | IP24                    |
| Min. water flow rate        | 1,6 - 1,8 lts/min       |
| Water pressure              | 0,3 - 8 bar             |
| Max temperature             | 52°C                    |
| Plumbing connections        | 1/2"                    |
| Product dimension H x W x D | 280 x 177 x 95 mm       |

# MITO SMD

## INSTANTANEOUS ELECTRIC WATER HEATER



- Copper heating element
- Seven work mode
- Color screen LED display
- ELCB device for extra electric protection (optional)
- Self diagnosis
- Low water pressure starting
- Hidden electric installation
- Range: 5,0 kW / 6,5 kW / 7,7 kW / 8,5 kW

| MODEL                       | MITO SMD                |
|-----------------------------|-------------------------|
| Power                       | 220 ~ 240 Vac, 50/60 Hz |
| Protection                  | IP24                    |
| Min. water flow rate        | 1,8 lts/min             |
| Water pressure              | 0,3 - 6 bar             |
| Plumbing connections        | 1/2"                    |
| Product dimension H x W x D | 280 x 177 x 94,5 mm     |
| Weight                      | 1,85 kg                 |

# AMORE

## INSTANTANEOUS SLIM ELECTRIC WATER HEATER



MOD. GSN

MOD. GSP



MOD. GDP

- Luxury black glass
- Elcb (Earth Leakage Circuit Breaker)
- Energy saving
- Multiple protections
- Wxhxd = 240 x 360 x 75mm
- Power: 4500 w - 220-240v/50hz

### AMORE MOD. GSN

- Control: power selector
- Temperature stabilizer
- Flow switch sensor
- Splash proof
- Thermal safety cut-out

### AMORE MOD. GSP

- Control: power selector
- Temperature stabilizer
- Flow switch sensor
- Splash proof
- Thermal safety cut-out
- Super silent pump
- Booster pump

### AMORE MOD. GDP

- Control: touch button
- Electronic control 4 memory setting
- Colorful led display
- Temperature dtabilizer
- Splash proof
- Thermal safety cut-out
- Super silent pump
- Booster pump





# SYSTEM COMPONENTS

## **TEMPERATURE CONTROLS**

|                              |     |
|------------------------------|-----|
| BASIC TEMPERATURE CONTROLS   | 122 |
| EVOLVED TEMPERATURE CONTROLS | 123 |

## **HEAT EXCHANGERS**

|                    |     |
|--------------------|-----|
| BRAZE-WELDED - SHE | 124 |
| INSPECTABLE - PHE  | 125 |
| SELECTION TABLES   | 127 |

# TEMPERATURE CONTROLS BASIC FOR ALL MODELS OF BOILERS



**BRIDGE \***  
Receiver for Wireless version



## > OSCAR W (ON/OFF PROGRAMMABLE THERMOSTAT)

- **Weekly** programming, max 6 periods a day
- Preset standard program, which can be completely customised
- Manual mode available
- Relay with voltage-free contact (24 to 230 V)
- Operated by 2xAA type batteries
- Extra functions for all models: **pump anti-seize, pre-heating, holiday, week-end, party**
- Phone contact input, for remote boiler switch on/off
- Model **RF** features **wireless** transmission to boiler's control board



## COMPATIBILITY

Opentherm-ready boilers /  
ON-OFF operated boilers / SUN P N

| CODE     | DESCRIPTION  |
|----------|--|
| 013110XA | <b>OSCAR W - WIRED PROGRAMMABLE THERMOSTAT</b><br>WEEKLY PROGRAMMING       |
| 013111XA | <b>OSCAR W RF - WIRELESS PROGRAMMABLE THERMOSTAT</b><br>WEEKLY PROGRAMMING |



## > ON/OFF CASCADE REGULATOR AND SYSTEM MANAGER

- can manage a cascade of one to four boilers
- the ignition request of the single modules is made through the room thermostat contact of each boiler (ON/OFF)
- it can manage up to two zones with sliding temperature, one of which is direct and one is mixed
- in addition to the two heating zones it can manage a coil DHW storage tank
- it can be used in systems with or without hydraulic separator
- complete with system probes, pre-wired external electrical panel probe

| CODE     | DESCRIPTION  |
|----------|--|
| 013015X0 | <b>ON/OFF CASCADE REGULATOR (MAX 4 BOILERS) AND SYSTEM MANAGER</b> |

# TEMPERATURE CONTROLS EVOLVED

ONLY FOR BOILERS THAT CAN BE COMBINED WITH REMOTE CONTROL



**BRIDGE +**  
Receiver for Wireless version

## > ROMEO W (MODULATING REMOTE CONTROL)

- weekly programming, max 6 periods per day
- heating delivery and domestic hot water temperature settings
- external temperature display and possibility of working at sliding temperature with outdoor probe (optional)
- modulation of the delivery temperature according to the room temperature
- boiler on - off - reset
- phone contact input
- Models: **W** wired - **W RF** with Wireless transmitter
- **A+ SYSTEM**: **Romeo** and the **outdoor probe**, combined with a **Ferrolli boiler** with seasonal efficiency  $\eta_s$  94%, constitute a heating system with **labelling A+** (scale from G to A+++)

| CODE     | DESCRIPTION   |
|----------|---|
| 013100XA | ROMEO W - WIRED REMOTE CONTROL WEEKLY PROGRAMMING       |
| 013101XA | ROMEO W RF - WIRELESS REMOTE CONTROL WEEKLY PROGRAMMING |



AX5200SQ

## > CASCADE CONTROLLER

- this can manage a cascade of one to five boilers
- the request to switch on the individual modules is made through a direct communication bus with the individual boilers
- the operating power of each boiler is managed directly by the regulator according to the load required by the system
- through the outdoor probe it can manage the flow temperature compensation of the heating system
- the kit consists of a regulator, an external temperature probe and a probe for the system flow temperature

| CODE     | DESCRIPTION                 |
|----------|-----------------------------|
| 1KVMH18A | CASCADE MODULE CONTROL UNIT |



FZ4 B

## > FZ4 B ZONING CONTROLLER

- board for systems with zones (max 3) two of which are mixed and one is direct, operating in combination with both modulating control timers and ON/OFF programmable thermostats
- it manages delivery temperatures that are sliding and differentiated between the zones


| CODE     | DESCRIPTION                        |
|----------|------------------------------------|
| 013013X0 | FZ4 B BOARD FOR SYSTEMS WITH ZONES |

# PLATES SHE HEAT EXCHANGERS WITH BRAZED STEEL PLATES



## > PRODUCT FEATURES

- Stainless steel plate heat exchangers (AISI 316L), copper brazed, for medium and small power plants
- Single-pass circuit in counter-current with four threaded stainless steel connections (AISI 304)
- Ideal for replacing a heat generator in an existing system or to combine it with systems with high flow rates
- Maximum operating pressure: 16 bar
- Max operating temperature: 200°C

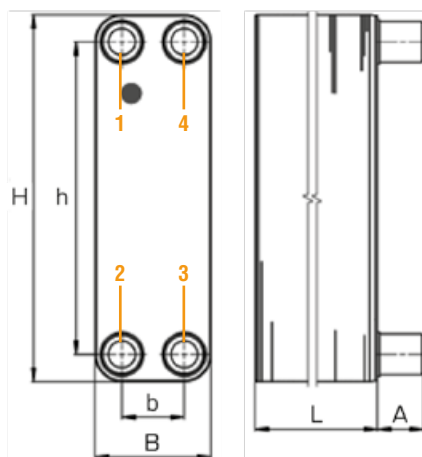

### KEY

- 1 Primary circuit 1" inlet
- 2 Primary circuit 1" outlet
- 3 Secondary circuit 1" inlet
- 4 Secondary circuit 1" outlet

| MODEL              | H   | h   | B   | b  | L     | A  | WEIGHT |
|--------------------|-----|-----|-----|----|-------|----|--------|
|                    | mm  | mm  | mm  | mm | mm    | mm | Kg     |
| <b>SHE 380 10P</b> | 380 | 320 | 123 | 64 | 35.4  | 22 | 3.47   |
| <b>SHE 380 20P</b> | 380 | 320 | 123 | 64 | 58.3  | 22 | 4.77   |
| <b>SHE 380 30P</b> | 380 | 320 | 123 | 64 | 81.2  | 22 | 6.07   |
| <b>SHE 380 50P</b> | 380 | 320 | 123 | 64 | 127.0 | 22 | 8.67   |

| BRAZED PLATE EXCHANGER |                        |            |             |                 | ACCESSORIES                |                 |
|------------------------|------------------------|------------|-------------|-----------------|----------------------------|-----------------|
| MODEL                  | POWER approximate (kW) | NO. PLATES | CONNECTIONS | CODE            | MODEL                      | CODE            |
| <b>SHE 380 10P</b>     | 20                     | 10         | 1"          | <b>052676X0</b> | Insulation kit SHE 380 10P | <b>052701X0</b> |
| <b>SHE 380 20P</b>     | 45                     | 20         | 1"          | <b>052677X0</b> | Insulation kit SHE 380 20P | <b>052701X0</b> |
| <b>SHE 380 30P</b>     | 65                     | 30         | 1"          | <b>052678X0</b> | Insulation kit SHE 380 30P | <b>052701X0</b> |
| <b>SHE 380 50P</b>     | 110                    | 50         | 1"          | <b>052679X0</b> | Insulation kit SHE 380 50P | <b>052702X0</b> |

# PLATES PHE HEAT EXCHANGERS WITH INSPECTABLE STEEL PLATES





## > PRODUCT FEATURES

- Stainless steel plate inspectable heat exchangers (AISI 316L), for medium and small power plants
- Single-pass circuit in counter-current with four threaded stainless steel connections (AISI 316)
- Plug-in NBR gaskets (installed without glue or silicones)
- The optional kits of ground support brackets and insulation are available for the entire range
- Ideal for replacing a heat generator in an existing system or to combine it with systems with high flow rates
- Maximum operating pressure: 10 bar
- Max operating temperature: 100°C

| INSPECTABLE PLATE EXCHANGER |            |             |                 | ACCESSORIES                |                 |
|-----------------------------|------------|-------------|-----------------|----------------------------|-----------------|
| MODEL                       | NO. PLATES | CONNECTIONS | CODE            | MODEL                      | CODE            |
| PHE 32380 11P               | 11         | 1"1/4       | <b>052680X0</b> | Insulation kit PHE 32/90   | <b>052703X0</b> |
| PHE 32380 19P               | 19         | 1"1/4       | <b>052681X0</b> | Brackets kit DN32          | <b>052699X0</b> |
| PHE 32380 29P               | 29         | 1"1/4       | <b>052682X0</b> | Insulation kit PHE 32/90   | <b>052703X0</b> |
| PHE 32380 41P               | 41         | 1"1/4       | <b>052683X0</b> | Brackets kit DN32          | <b>052699X0</b> |
| PHE 32380 47P               | 47         | 1"1/4       | <b>052684X0</b> | Insulation kit PHE 32/140  | <b>052704X0</b> |
| PHE 32380 53P               | 53         | 1"1/4       | <b>052685X0</b> | Brackets kit DN32          | <b>052699X0</b> |
| PHE 50420 35P               | 35         | 2"          | <b>052686X0</b> | Insulation kit PHE 32/140  | <b>052704X0</b> |
| PHE 50420 43P               | 43         | 2"          | <b>052687X0</b> | Brackets kit DN32          | <b>052699X0</b> |
| PHE 50420 53P               | 53         | 2"          | <b>052688X0</b> | Insulation kit PHE 32/140  | <b>052704X0</b> |
| PHE 50420 59P               | 59         | 2"          | <b>052689X0</b> | Brackets kit DN32          | <b>052699X0</b> |
| PHE 50420 67P               | 67         | 2"          | <b>052690X0</b> | Insulation kit PHE 32/160  | <b>052705X0</b> |
| PHE 50420 71P               | 71         | 2"          | <b>052691X0</b> | Brackets kit DN32          | <b>052699X0</b> |
| PHE 50420 81P               | 81         | 2"          | <b>052692X0</b> | Insulation kit PHE 50/110  | <b>052706X0</b> |
| PHE 50420 85P               | 85         | 2"          | <b>052693X0</b> | Brackets kit DN 50         | <b>052700X0</b> |
| PHE 50420 97P               | 97         | 2"          | <b>052694X0</b> | Insulation kit PHE 50/210  | <b>052707X0</b> |
| PHE 50750 71P               | 71         | 2"          | <b>052695X0</b> | Brackets kit DN 50         | <b>052700X0</b> |
| PHE 50750 79P               | 79         | 2"          | <b>052696X0</b> | Insulation kit PHE 50/210  | <b>052707X0</b> |
| PHE 50750 89P               | 89         | 2"          | <b>052697X0</b> | Brackets kit DN 50         | <b>052700X0</b> |
| PHE 50750 99P               | 99         | 2"          | <b>052698X0</b> | Insulation kit PHE 50/210  | <b>052707X0</b> |
| PHE 65603 145P              | 145        | 2" 1/2      | <b>052728X0</b> | Brackets kit DN 50         | <b>052700X0</b> |
| PHE 100705 61P              | 61         | 4"          | <b>052729X0</b> | Insulation kit PHE 50/290  | <b>052708X0</b> |
|                             |            |             |                 | Brackets kit DN 50         | <b>052700X0</b> |
|                             |            |             |                 | Insulation kit PHE 50/290  | <b>052708X0</b> |
|                             |            |             |                 | Brackets kit DN 50         | <b>052700X0</b> |
|                             |            |             |                 | Insulation kit PHE 50/290  | <b>052708X0</b> |
|                             |            |             |                 | Brackets kit DN 50         | <b>052700X0</b> |
|                             |            |             |                 | Insulation kit PHE 50/290  | <b>052708X0</b> |
|                             |            |             |                 | Brackets kit DN 50         | <b>052700X0</b> |
|                             |            |             |                 | Insulation kit PHE 50/290  | <b>052708X0</b> |
|                             |            |             |                 | Brackets kit DN 50         | <b>052700X0</b> |
|                             |            |             |                 | Insulation kit PHE 100/180 | <b>052734X0</b> |
|                             |            |             |                 | Brackets kit DN 65         | <b>052732X0</b> |
|                             |            |             |                 | Insulation kit PHE 65/430  | <b>052733X0</b> |
|                             |            |             |                 | Insulation kit PHE 100/180 | <b>052734X0</b> |


## > DIMENSIONS

| MODEL          | A    | E   | B   | D (max) | I   | Weight |
|----------------|------|-----|-----|---------|-----|--------|
|                | mm   | mm  | mm  | mm      | mm  | Kg     |
| PHE 32380 11P  | 470  | 380 | 200 | 169     | 45  | 32     |
| PHE 32380 19P  | 470  | 380 | 200 | 169     | 45  | 35     |
| PHE 32380 29P  | 470  | 380 | 200 | 169     | 45  | 37     |
| PHE 32380 41P  | 470  | 380 | 200 | 269     | 45  | 42     |
| PHE 32380 47P  | 470  | 380 | 200 | 269     | 45  | 43     |
| PHE 32380 53P  | 470  | 380 | 200 | 469     | 45  | 47     |
| PHE 50420 35P  | 678  | 420 | 310 | 319     | 170 | 96     |
| PHE 50420 43P  | 678  | 420 | 310 | 459     | 170 | 103    |
| PHE 50420 53P  | 678  | 420 | 310 | 459     | 170 | 109    |
| PHE 50420 59P  | 678  | 420 | 310 | 459     | 170 | 112    |
| PHE 50420 67P  | 678  | 420 | 310 | 459     | 170 | 116    |
| PHE 50420 71P  | 678  | 420 | 310 | 459     | 170 | 118    |
| PHE 50420 81P  | 720  | 420 | 310 | 599     | 170 | 127    |
| PHE 50420 85P  | 720  | 420 | 310 | 599     | 170 | 129    |
| PHE 50420 97P  | 720  | 420 | 310 | 599     | 170 | 135    |
| PHE50750 71P   | 1008 | 750 | 310 | 459     | 170 | 180    |
| PHE 50750 79P  | 1050 | 750 | 310 | 599     | 170 | 190    |
| PHE 50750 89P  | 1050 | 750 | 310 | 599     | 170 | 199    |
| PHE 50750 99P  | 1050 | 750 | 310 | 599     | 170 | 207    |
| PHE 65603 145P | 819  | 603 | 310 | 833     | 128 | 210    |
| PHE 100705 61P | 1080 | 705 | 530 | 740     | 198 | 435    |

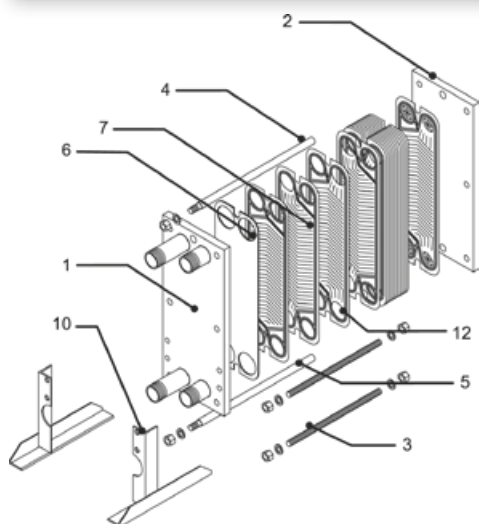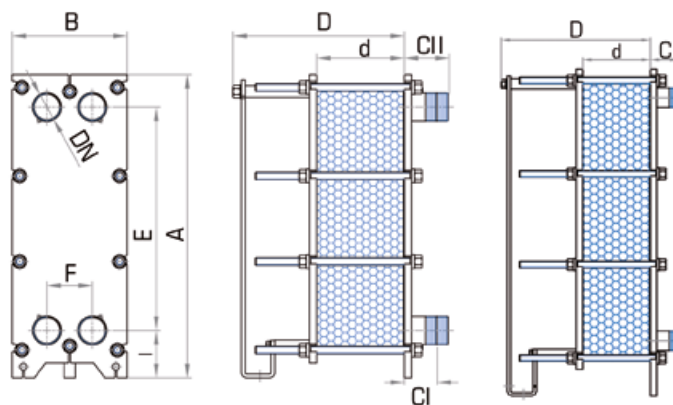

### KEY

- 1 Fixed large plate
- 2 Mobile large plate
- 3 Tie rods
- 4 Support / guide bar
- 5 Lower plate guide
- 6 Aluminium thickness
- 7 Plates + Gaskets
- 8 Column
- 9 Roller
- 10 Anchor angles (feet)
- 11 Small sleeves
- 12 Manifold

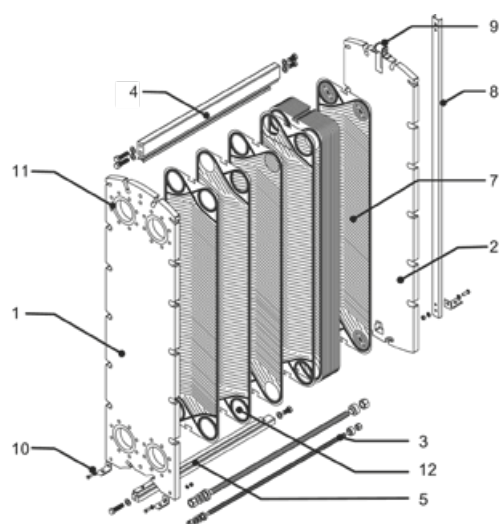


| GASKETS KIT                | CODE     |
|----------------------------|----------|
| Gaskets kit PHE 32380 11P  | 052709X0 |
| Gaskets kit PHE 32380 19P  | 052710X0 |
| Gaskets kit PHE 32380 29P  | 052711X0 |
| Gaskets kit PHE 32380 41P  | 052712X0 |
| Gaskets kit PHE 32380 47P  | 052713X0 |
| Gaskets kit PHE 32380 53P  | 052714X0 |
| Gaskets kit PHE 50420 35P  | 052715X0 |
| Gaskets kit PHE 50420 43P  | 052716X0 |
| Gaskets kit PHE 50420 53P  | 052717X0 |
| Gaskets kit PHE 50420 59P  | 052718X0 |
| Gaskets kit PHE 50420 67P  | 052719X0 |
| Gaskets kit PHE 50420 71P  | 052720X0 |
| Gaskets kit PHE 50420 81P  | 052721X0 |
| Gaskets kit PHE 50420 85P  | 052722X0 |
| Gaskets kit PHE 50420 97P  | 052723X0 |
| Gaskets kit PHE 50750 71P  | 052724X0 |
| Gaskets kit PHE 50750 79P  | 052725X0 |
| Gaskets kit PHE 50750 89P  | 052726X0 |
| Gaskets kit PHE 50750 99P  | 052727X0 |
| Gaskets kit PHE 65603 145P | 052730X0 |
| Gaskets kit PHE 100705 61P | 052731X0 |

# PLATES SHE / PHE QUICK SELECTION TABLES

## > BOILER ON HIGH TEMPERATURE SYSTEMS

| EXCHANGED POWER (kW) | MODEL         | CODE     | PRIMARY: 80 / 60°C |                | SECONDARY: 50 / 70°C |                |
|----------------------|---------------|----------|--------------------|----------------|----------------------|----------------|
|                      |               |          | FLOW RATES         | PRESSURE DROPS | FLOW RATES           | PRESSURE DROPS |
|                      |               |          | (m³/h)             | (m³ H₂O)       | (m³/h)               | (m³ H₂O)       |
| 20                   | SHE 380 10P   | 052676X0 | 0.90               | 1.02           | 0.900                | 0.704          |
| 45                   | SHE 380 20P   | 052677X0 | 2.00               | 1.15           | 2.000                | 0.995          |
| 65                   | SHE 380 30P   | 052678X0 | 2.90               | 1.20           | 2.800                | 1.116          |
| 110                  | SHE 380 50P   | 052679X0 | 4.80               | 2.26           | 4.800                | 2.169          |
| 20                   | PHE 32380 11P | 052680X0 | 0.88               | 0.446          | 0.88                 | 0.439          |
| 45                   | PHE 32380 19P | 052681X0 | 1.98               | 0.717          | 1.97                 | 0.707          |
| 70                   | PHE 32380 29P | 052682X0 | 3.08               | 0.769          | 3.06                 | 0.758          |
| 110                  | PHE 32380 41P | 052683X0 | 4.83               | 1.039          | 4.81                 | 1.026          |
| 125                  | PHE 32380 47P | 052684X0 | 5.49               | 1.084          | 5.47                 | 1.071          |
| 140                  | PHE 32380 53P | 052685X0 | 6.15               | 1.141          | 6.13                 | 1.128          |
| 220                  | PHE 50420 35P | 052686X0 | 9.67               | 1.319          | 9.63                 | 1.319          |
| 265                  | PHE 50420 43P | 052687X0 | 11.64              | 1.3            | 11.59                | 1.3            |
| 320                  | PHE 50420 53P | 052688X0 | 14.06              | 1.302          | 14.00                | 1.302          |
| 375                  | PHE 50420 59P | 052689X0 | 16.48              | 1.478          | 16.41                | 1.477          |
| 440                  | PHE 50420 67P | 052690X0 | 19.33              | 1.643          | 19.25                | 1.642          |
| 470                  | PHE 50420 71P | 052691X0 | 20.65              | 1.708          | 20.56                | 1.707          |
| 540                  | PHE 50420 81P | 052692X0 | 23.73              | 1.844          | 23.63                | 1.843          |
| 565                  | PHE 50420 85P | 052693X0 | 24.83              | 1.883          | 24.72                | 1.882          |
| 640                  | PHE 50420 97P | 052694X0 | 28.12              | 2.019          | 28.00                | 2.016          |
| 660                  | PHE50750 71P  | 052695X0 | 29.00              | 1.552          | 28.88                | 1.533          |
| 760                  | PHE 50750 79P | 052696X0 | 33.39              | 1.849          | 33.25                | 1.849          |
| 860                  | PHE 50750 89P | 052697X0 | 37.79              | 2.135          | 37.63                | 2.135          |
| 960                  | PHE 50750 99P | 052698X0 | 42.18              | 2.456          | 42.00                | 2.454          |


| TYPE OF SYSTEM | GENERATOR / TERMINAL | TEMPERATURES |           |
|----------------|----------------------|--------------|-----------|
|                |                      | Temp. IN     | Temp. OUT |
| Primary        | Boiler               | 80°C         | 60°C      |
| Secondary      | Radiators            | 50°C         | 70°C      |

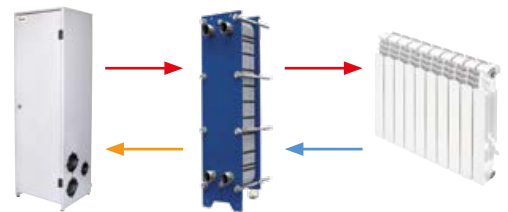

## > BOILER ON SYSTEMS WITH FAN COILS OR OVERSIZED RADIATORS

| EX-CHANGED POWER (kW) | MODEL         | CODE     | PRIMARY: 70 / 50°C |                | SECONDARY: 30 / 50°C |                |
|-----------------------|---------------|----------|--------------------|----------------|----------------------|----------------|
|                       |               |          | FLOW RATES         | PRESSURE DROPS | FLOW RATES           | PRESSURE DROPS |
|                       |               |          | (m³/h)             | (m³ H₂O)       | (m³/h)               | (m³ H₂O)       |
| 20                    | SHE 380 10P   | 052676X0 | 0.90               | 1.040          | 0.900                | 0.742          |
| 45                    | SHE 380 20P   | 052677X0 | 2.00               | 1.170          | 2.000                | 1.041          |
| 65                    | SHE 380 30P   | 052678X0 | 2.80               | 1.220          | 2.800                | 1.158          |
| 110                   | SHE 380 50P   | 052679X0 | 4.80               | 2.286          | 4.800                | 2.231          |
| 20                    | PHE 32380 11P | 052680X0 | 0.88               | 0.446          | 0.875                | 0.439          |
| 45                    | PHE 32380 19P | 052681X0 | 1.97               | 0.216          | 1.9534               | 0.218          |
| 70                    | PHE 32380 29P | 052682X0 | 3.06               | 0.761          | 3.04                 | 0.735          |
| 110                   | PHE 32380 41P | 052683X0 | 4.81               | 1.027          | 4.78                 | 0.994          |
| 125                   | PHE 32380 47P | 052684X0 | 5.47               | 1.070          | 5.43                 | 1.038          |
| 140                   | PHE 32380 53P | 052685X0 | 6.12               | 1.125          | 6.08                 | 1.094          |
| 220                   | PHE 50420 35P | 052686X0 | 9.62               | 1.348          | 9.55                 | 1.346          |
| 265                   | PHE 50420 43P | 052687X0 | 11.59              | 1.328          | 11.5                 | 1.326          |
| 320                   | PHE 50420 53P | 052688X0 | 14.00              | 1.329          | 13.89                | 1.327          |
| 375                   | PHE 50420 59P | 052689X0 | 16.41              | 1.506          | 16.28                | 1.503          |
| 440                   | PHE 50420 67P | 052690X0 | 19.25              | 1.672          | 19.1                 | 1.669          |
| 470                   | PHE 50420 71P | 052691X0 | 20.56              | 1.783          | 20.4                 | 1.733          |
| 540                   | PHE 50420 81P | 052692X0 | 23.62              | 1.874          | 23.44                | 1.869          |
| 565                   | PHE 50420 85P | 052693X0 | 24.72              | 1.913          | 24.53                | 1.907          |
| 640                   | PHE 50420 97P | 052694X0 | 28.00              | 2.047          | 27.78                | 2.041          |
| 660                   | PHE50750 71P  | 052695X0 | 28.87              | 1.573          | 28.65                | 1.577          |
| 760                   | PHE 50750 79P | 052696X0 | 33.25              | 1.870          | 32.99                | 1.872          |
| 860                   | PHE 50750 89P | 052697X0 | 37.62              | 2.156          | 37.33                | 2.156          |
| 960                   | PHE 50750 99P | 052698X0 | 42.00              | 2.475          | 41.67                | 2.473          |

| TYPE OF SYSTEM | GENERATOR / TERMINAL  | TEMPERATURES |           |
|----------------|-----------------------|--------------|-----------|
|                |                       | Temp. IN     | Temp. OUT |
| Primary        | Boiler                | 70°C         | 50°C      |
| Secondary      | Radiators / Fan Coils | 30°C         | 50°C      |

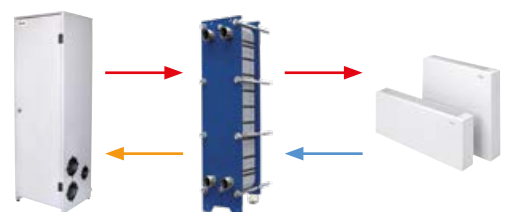


# PLATES SHE / PHE QUICK SELECTION TABLES

## > BOILER ON LOW TEMPERATURE SYSTEMS

| EX-CHANGED POWER (kW) | MODEL         | CODE     | PRIMARY: 60 / 40°C |                | SECONDARY: 30 / 40°C |                |
|-----------------------|---------------|----------|--------------------|----------------|----------------------|----------------|
|                       |               |          | FLOW RATES         | PRESSURE DROPS | FLOW RATES           | PRESSURE DROPS |
|                       |               |          | (m³/h)             | (m² H₂O)       | (m³/h)               | (m² H₂O)       |
| 20                    | SHE 380 10P   | 052676X0 | 0.90               | 1.066          | 1.70                 | 2.668          |
| 45                    | SHE 380 20P   | 052677X0 | 2.00               | 1.196          | 3.90                 | 3.792          |
| 65                    | SHE 380 30P   | 052678X0 | 2.80               | 1.242          | 5.60                 | 4.284          |
| 110                   | SHE 380 50P   | 052679X0 | 4.80               | 2.318          | 9.50                 | 8.385          |
| 20                    | PHE 32380 11P | 052680X0 | 0.87               | 0.442          | 1.73                 | 1.686          |
| 45                    | PHE 32380 19P | 052681X0 | 1.96               | 0.710          | 3.90                 | 2.715          |
| 70                    | PHE 32380 29P | 052682X0 | 3.05               | 0.760          | 6.07                 | 2.916          |
| 110                   | PHE 32380 41P | 052683X0 | 4.79               | 1.026          | 9.53                 | 3.951          |
| 125                   | PHE 32380 47P | 052684X0 | 5.45               | 1.069          | 10.83                | 4.126          |
| 140                   | PHE 32380 53P | 052685X0 | 6.12               | 1.125          | 12.13                | 4.349          |
| 220                   | PHE 50420 35P | 052686X0 | 9.59               | 1.344          | 19.07                | 4.951          |
| 265                   | PHE 50420 43P | 052687X0 | 11.55              | 1.323          | 22.97                | 4.885          |
| 320                   | PHE 50420 53P | 052688X0 | 13.94              | 1.322          | 27.73                | 4.900          |
| 375                   | PHE 50420 59P | 052689X0 | 16.33              | 1.498          | 32.50                | 5.567          |
| 440                   | PHE 50420 67P | 052690X0 | 19.17              | 1.662          | 38.13                | 6.198          |
| 470                   | PHE 50420 71P | 052691X0 | 20.48              | 1.726          | 40.73                | 6.448          |
| 540                   | PHE 50420 81P | 052692X0 | 23.53              | 1.859          | 46.80                | 6.975          |
| 565                   | PHE 50420 85P | 052693X0 | 26.62              | 1.897          | 48.96                | 7.128          |
| 640                   | PHE 50420 97P | 052694X0 | 27.89              | 2.028          | 55.46                | 7.655          |
| 660                   | PHE50750 71P  | 052695X0 | 28.76              | 1.560          | 57.20                | 5.896          |
| 760                   | PHE 50750 79P | 052696X0 | 33.12              | 1.851          | 65.86                | 7.178          |
| 860                   | PHE65603 145P | 052728X0 | 37.47              | 0.975          | 74.53                | 3.841          |
| 960                   | PHE100705 61P | 052729X0 | 41.83              | 0.463          | 83.20                | 1.723          |

| TYPE OF SYSTEM | GENERATOR / TERMINAL | TEMPERATURES |           |
|----------------|----------------------|--------------|-----------|
|                |                      | Temp. IN     | Temp. OUT |
| Primary        | Boiler               | 60°C         | 40°C      |
| Secondary      | Underfloor           | 30°C         | 40°C      |

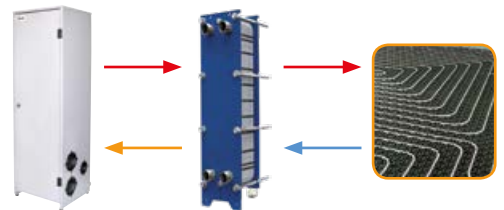



# RADIATORS

|                      |     |
|----------------------|-----|
| PROTEO-PROTEO HP     | 130 |
| XIAN                 | 131 |
| EUROPA C             | 132 |
| TAL                  | 133 |
| VARESE               | 134 |
| STEEL PANEL RADIATOR | 135 |
| TALIA                | 136 |

# PROTEO-PROTEO HP

## PRE-CAST ALUMINIUM RADIATORS



### > PRODUCT FEATURES

- Pre-cast aluminium radiators assembled with nipples and gaskets in sets of 4 to 10 elements
- Painted white (RAL 9010)
- A careful study of the shapes has made it possible to obtain particularly effective convective exchange fins, with one of the highest thermal efficiencies on the market.
- The packaging consists of four corner pieces in thick cardboard, protected by a heat-shrinkable nylon cover. IT was designed to be able to install the radiator without removing the cardboard corners in order to protect it until the work is completed.
- The HP models (600 and 700) are built with a reinforced structure capable of running at high operating pressures, up to a maximum of 16 bar.




PROTEO




PROTEO HP

### PROTEO

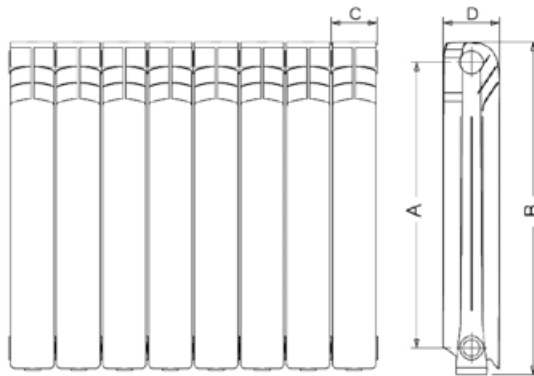

### PROTEO HP

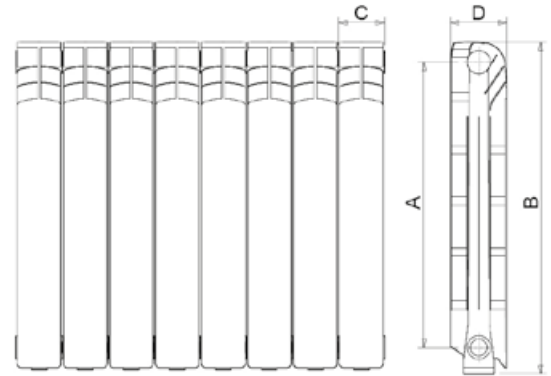

\* only mod. HP



| MOD.          | HEAT OUTPUT    |                |                | EXPONENT   | CONSTANT | MAX OPERATING PRESS. | WATER CONTENT | CONNECTION CENTRE DISTANCE | HEIGHT | WIDTH | DEPTH | CONNECTIONS |
|---------------|----------------|----------------|----------------|------------|----------|----------------------|---------------|----------------------------|--------|-------|-------|-------------|
|               | $\Delta t$ 30K | $\Delta t$ 40K | $\Delta t$ 50K |            |          |                      |               |                            |        |       |       |             |
|               | Watt/el        | Watt/el        | Watt/el        |            |          |                      |               |                            |        |       |       |             |
|               | n              | $k_m$          | bar            | litres/el. | A        | B                    | C             | D                          |        |       |       |             |
|               | mm             | mm             | mm             | mm         | mm       | mm                   | mm            | mm                         | inches |       |       |             |
| PROTEO 450    | 47.4           | 69.0           | 92.0           | 1.30565    | 0.558700 | 6                    | 0.310         | 350                        | 431.0  | 80    | 100   | 1           |
| PROTEO HP 600 | 55.8           | 81.1           | 106.6          | 1.29670    | 0.678240 | 16                   | 0.320         | 500                        | 581.5  | 80    | 100   | 1           |
| PROTEO HP 700 | 64.9           | 94.2           | 125.7          | 1.29403    | 0.795932 | 16                   | 0.354         | 600                        | 681.5  | 80    | 100   | 1           |
| PROTEO 800    | 81.0           | 119.6          | 161.0          | 1.35387    | 0.810530 | 6                    | 0.500         | 700                        | 781.0  | 80    | 100   | 1           |
| PROTEO 900    | 86.9           | 126.8          | 170.0          | 1.31409    | 0.995242 | 10                   | 0.520         | 800                        | 881.0  | 80    | 98    | 1           |

NB: For the chemical-physical characteristics of the water in the thermal circuit, strictly observe standard UNI 8065


Thermal missions in WATT (according to standard EN 442 with  $\Delta T=50^\circ C$ ) - Characteristic equation of the model:  $Q = K_m \times (\Delta T)^n$

### > ACCESSORIES ON REQUEST

| CODE       | DESCRIPTION     |
|------------|-----------------|
| ZE19993000 | 1" RH-LH NIPPLE |
| ZE19993010 | 1" GASKET       |



- Die-cast aluminium radiator with 2 front convective fins
- Elegant design of the rounded top head. Besides aesthetic appearance of the rounded edge and along with the gradual curve of the convective fins allow a uniform distribution of warmed air, without turbulences and air flows towards the wall
- 6 bar as maximum operating pressure
- Blocks are assembled in factory in units from 2 to 12 sections
- Sections are assembled each other in the factory via an inorganic elastic joint, with unbeatable resistance to high temperature and pressures, dilatations, circuit additives, chemical gaseous reactions in the heating system. This results in the maximum watertightness of the radiator itself.

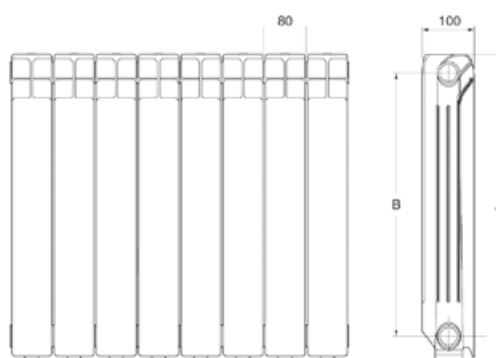


| MODEL                   |                    |        | 450 N   | 600 N   | 700 N  | 800 N   |
|-------------------------|--------------------|--------|---------|---------|--------|---------|
| Thermal emission EN 442 | $\Delta t$ 50°C    | W      | 90,8    | 122,9   | 142,2  | 160,2   |
|                         | $\Delta t$ 60°C    | W      | 115,1   | 156,2   | 181,4  | 204,3   |
| Exponent index n        |                    |        | 1,30483 | 1,31423 | 1,334  | 1,33487 |
| Constant Km             |                    |        | 0,5508  | 0,719   | 0,7702 | 0,86447 |
| Water content           |                    | Liters | 0,31    | 0,39    | 0,45   | 0,5     |
| Dimensions              | Total height (A)   | mm     | 431     | 581     | 681    | 781     |
|                         | Tapping center (B) | mm     | 350     | 500     | 600    | 700     |
| Connections             | Diameter           | inches | 1"      | 1"      | 1"     | 1"      |

### > ACCESSORIES ON REQUEST

| CODE       | DESCRIPTION     |
|------------|-----------------|
| ZE19993000 | 1" RH-LH NIPPLE |
| ZE19993010 | 1" GASKET       |



- Die-cast aluminium radiator with flat surface
- It is the ideal smart solution which fits perfectly with any style of furniture, thanks to its sober and elegant design
- 6 bar as maximum operating pressure
- Blocks are assembled in factory in units from 2 to 12 sections
- Each section is painted individually through epoxy powder coating: this results in a brilliant surface, resistant to heat throughout the years
- Sections are assembled each other in the factory via an inorganic elastic joint, with unbeatable resistance to high temperature and pressures, dilatations, circuit additives, chemical gaseous reactions in the heating system. This results in the maximum watertightness of the radiator itself.

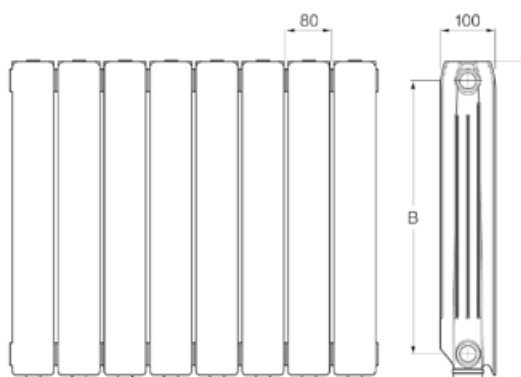

| MODEL                   |                    |        | 450 C    | 600 C    | 700 C    | 800 C    |
|-------------------------|--------------------|--------|----------|----------|----------|----------|
| Thermal emission EN 442 | $\Delta t$ 50°C    | W      | 89,2     | 119,8    | 137,1    | 158,0    |
|                         | $\Delta t$ 60°C    | W      | 112,7    | 152,3    | 174,3    | 200,9    |
| Exponent index n        |                    |        | 1,27784  | 1,31869  | 1,31598  | 1,32052  |
| Constant Km             |                    |        | 0,601947 | 0,688627 | 0,796525 | 0,901564 |
| Water content           |                    | Liters | 0,31     | 0,39     | 0,45     | 0,50     |
| Dimensions              | Total height (A)   | mm     | 431      | 581      | 681      | 781      |
|                         | Tapping center (B) | mm     | 350      | 500      | 600      | 700      |
| Connections             | Diameter           | inches | 1"       | 1"       | 1"       | 1"       |

### > ACCESSORIES ON REQUEST

| CODE       | DESCRIPTION     |
|------------|-----------------|
| ZE19993000 | 1" RH-LH NIPPLE |
| ZE19993010 | 1" GASKET       |




**> PRODUCT FEATURES**


TAL is an aluminium design radiator, consisting of vertical extruded bars and die cast heads. The modern design gives it wide flexibility of use while the accuracy and careful construction guarantee high quality and durability.

- Consisting of aluminium die cast heads and extruded bars
- Exclusively supplied in inseparable modules of 2 or 3 elements
- Using nipples and OR gasket (optional), the modules can be assembled in groups tailored to your needs
- Reversible up/down (not front/rear). Used both in traditional and single-pipe installations
- Maximum operating pressure 10 bar
- 1" gas connections
- Painted white RAL 9010

**TAL 2 (2-ELEMENT MODULE)**

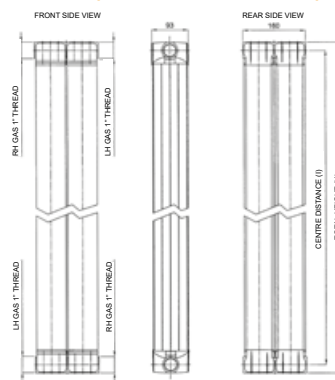

**TAL 3 (3-ELEMENT MODULE)**

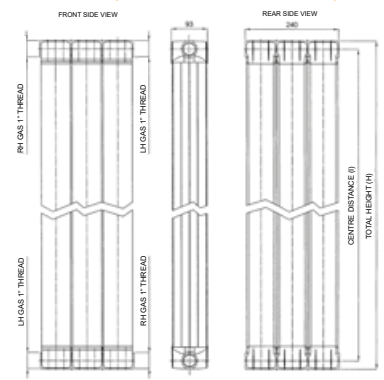

| TAL             | WIDTH<br>(ELEMENT)<br>L mm | HEIGHT<br>H mm | DEPTH<br>mm | CENTRE<br>DISTANCE<br>l mm | HEAT OUTPUT FOR RADIATOR Watt |         |         | EXPONENT<br>n | CONSTANT<br>K <sub>m</sub> | CODE            |
|-----------------|----------------------------|----------------|-------------|----------------------------|-------------------------------|---------|---------|---------------|----------------------------|-----------------|
|                 |                            |                |             |                            | ΔT=30°C                       | ΔT=40°C | ΔT=50°C |               |                            |                 |
| <b>2 - 1000</b> | 80                         | 1043           | 93.3        | 1000                       | 190.6                         | 281.4   | 380.6   | 1.35402       | 0.95279                    | <b>16501020</b> |
| <b>2 - 1200</b> | 80                         | 1243           | 93.3        | 1200                       | 218.6                         | 323.0   | 437.0   | 1.35582       | 1.08633                    | <b>16502020</b> |
| <b>2 - 1400</b> | 80                         | 1443           | 93.3        | 1400                       | 245.2                         | 362.4   | 490.6   | 1.35761       | 1.21104                    | <b>16503020</b> |
| <b>2 - 1600</b> | 80                         | 1643           | 93.3        | 1600                       | 271.0                         | 400.2   | 541.8   | 1.35691       | 1.34110                    | <b>16504020</b> |
| <b>2 - 1800</b> | 80                         | 1843           | 93.3        | 1800                       | 295.6                         | 436.6   | 590.8   | 1.35621       | 1.46639                    | <b>16505020</b> |
| <b>2 - 2000</b> | 80                         | 2043           | 93.3        | 2000                       | 319.2                         | 471.4   | 638.0   | 1.35551       | 1.58789                    | <b>16506020</b> |
| <b>3 - 1000</b> | 80                         | 1043           | 93.3        | 1000                       | 285.9                         | 422.1   | 570.9   | 1.35402       | 0.95279                    | <b>16501030</b> |
| <b>3 - 1200</b> | 80                         | 1243           | 93.3        | 1200                       | 327.9                         | 484.5   | 655.5   | 1.35582       | 1.08633                    | <b>16502030</b> |
| <b>3 - 1400</b> | 80                         | 1443           | 93.3        | 1400                       | 367.8                         | 543.6   | 735.9   | 1.35761       | 1.21104                    | <b>16503030</b> |
| <b>3 - 1600</b> | 80                         | 1643           | 93.3        | 1600                       | 406.5                         | 600.3   | 812.7   | 1.35691       | 1.34110                    | <b>16504030</b> |
| <b>3 - 1800</b> | 80                         | 1843           | 93.3        | 1800                       | 443.4                         | 654.9   | 866.2   | 1.35621       | 1.46639                    | <b>16505030</b> |
| <b>3 - 2000</b> | 80                         | 2043           | 93.3        | 2000                       | 478.8                         | 707.1   | 957.0   | 1.35551       | 1.58789                    | <b>16506030</b> |

NB: For the chemical-physical characteristics of the water in the thermal circuit, strictly observe standard UNI 8065

**> ACCESSORIES ON REQUEST**

| CODE     | DESCRIPTION   |
|----------|---|
| 19991334 | TAL ASSEMBLY KIT 2-3 ELEMENTS AND SINGLE-PIPE DIAPHRAGM |
| 19999932 | PACK. OF 2 ADJUSTABLE SHELVES 2xT3                      |


# VARESE HIGH EFFICIENCY RADIATOR





## > PRODUCT FEATURES (version HE)

- High performance radiator particularly suitable for low temperature systems in combination with condensing boilers
- Finned copper/aluminium heat exchanger with low water content, sized to optimise forced air draught with particularly silent brushless fans, each mounted with four silent blocks
- 4 operating modes, "Automatic", "Eco", "Comfort" and "High emission", through a control panel with easy-to-read backlit buttons
- Reversible RH / LH single-pipe and two-pipe connection outlets
- Depth of 119 mm completely flush with the wall on two heights, respectively 635 mm and 350 mm
- Painted RAL 9016 with removable front panel for cleaning and maintenance
- Compact and elegant design (especially mod. LP - under-window)

(Also available in non HE version, without fans)

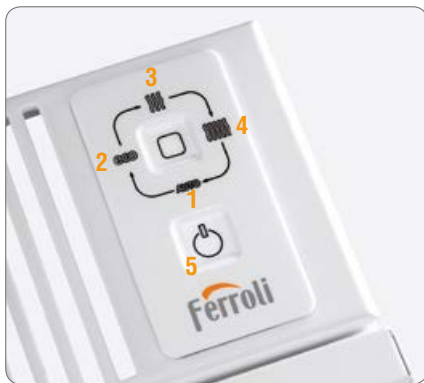

- 1 Auto Mod.: automatic fan speed selection
- 2 Eco Mod.: Fan at minimum speed
- 3 Comfort Mod.: Fan at medium speed
- 4 High Emission Mod.: Fan at maximum speed
- 5 Stand-by

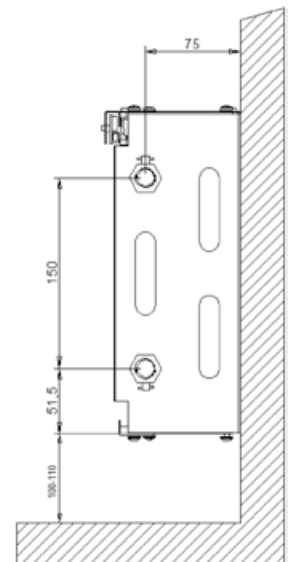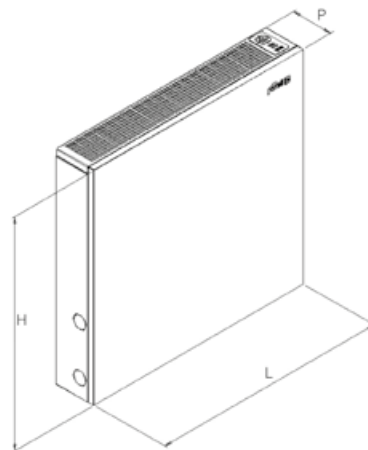

## > TABLE OF EFFICIENCIES - DIMENSIONAL DATA - CODE - PRICE

| MODEL VARESE      | HEAT OUTPUT<br>Watt           |                               |                               | MAX WORKING PRESSURE | WATER CONTENT | SOUND POWER<br>dB | DIMENSIONS   |                            |                  | CODE              |
|-------------------|-------------------------------|-------------------------------|-------------------------------|----------------------|---------------|-------------------|--------------|----------------------------|------------------|-------------------|
|                   | $\Delta T=30^{\circ}\text{C}$ | $\Delta T=40^{\circ}\text{C}$ | $\Delta T=50^{\circ}\text{C}$ |                      |               |                   | H / L / D    | Connection centre distance | Idro connections |                   |
| <b>500 HE</b>     | 569.6                         | 823.3                         | 1067.4                        | 10                   | 0.48          | 29                | 635/545/119  | 150                        | 1/2              | <b>ZE17VH105A</b> |
| <b>600 HE</b>     | 767.2                         | 1074.4                        | 1402.3                        | 10                   | 0.62          | 30.2              | 635/654/119  | 150                        | 1/2              | <b>ZE17VH106A</b> |
| <b>800 HE</b>     | 1112.6                        | 1479.1                        | 1981.4                        | 10                   | 0.84          | 32                | 635/879/119  | 150                        | 1/2              | <b>ZE17VH108A</b> |
| <b>1000 HE</b>    | 1517.0                        | 1995.3                        | 2637.2                        | 10                   | 1.1           | 33.2              | 635/1094/119 | 150                        | 1/2              | <b>ZE17VH110A</b> |
| <b>LP 500 HE</b>  | 484.0                         | 753.5                         | 997.7                         | 10                   | 0.48          | 29                | 350/545/119  | 150                        | 1/2              | <b>ZE17VH205A</b> |
| <b>LP 600 HE</b>  | 710.0                         | 1032.6                        | 1325.6                        | 10                   | 0.62          | 30.2              | 350/654/119  | 150                        | 1/2              | <b>ZE17VH206A</b> |
| <b>LP 800 HE</b>  | 1087.6                        | 1395.3                        | 1855.8                        | 10                   | 0.84          | 32                | 350/879/119  | 150                        | 1/2              | <b>ZE17VH208A</b> |
| <b>LP 1000 HE</b> | 1493.3                        | 1939.5                        | 2581.4                        | 10                   | 1.1           | 33.2              | 350/1094/119 | 150                        | 1/2              | <b>ZE17VH210A</b> |
| <b>500</b>        | 195.3                         | 265.1                         | 376.7                         | 10                   | 0.48          | -                 | 635/545/119  | 150                        | 1/2              | <b>ZE17VV105A</b> |
| <b>600</b>        | 244.2                         | 390.7                         | 523.3                         | 10                   | 0.62          | -                 | 635/654/119  | 150                        | 1/2              | <b>ZE17VV106A</b> |
| <b>800</b>        | 348.8                         | 607                           | 795.3                         | 10                   | 0.84          | -                 | 635/879/119  | 150                        | 1/2              | <b>ZE17VV108A</b> |
| <b>1000</b>       | 509.3                         | 795.3                         | 1060.5                        | 10                   | 1.1           | -                 | 635/1094/119 | 150                        | 1/2              | <b>ZE17VV110A</b> |
| <b>LP 500</b>     | 153.5                         | 237.2                         | 334.9                         | 10                   | 0.48          | -                 | 350/545/119  | 150                        | 1/2              | <b>ZE17VV205A</b> |
| <b>LP 600</b>     | 209.3                         | 334.9                         | 439.5                         | 10                   | 0.62          | -                 | 350/654/119  | 150                        | 1/2              | <b>ZE17VV206A</b> |
| <b>LP 800</b>     | 293                           | 537.2                         | 676.7                         | 10                   | 0.84          | -                 | 350/879/119  | 150                        | 1/2              | <b>ZE17VV208A</b> |
| <b>LP 1000</b>    | 348.8                         | 600                           | 837.2                         | 10                   | 1.1           | -                 | 350/1094/119 | 150                        | 1/2              | <b>ZE17VV210A</b> |

# FERROLI STEEL PANEL RADIATOR 4 OR 6 CONNECTIONS



- 5 types, 5 heights
- 20 different lengths between 400 - 3000 mm
- 4 or 6 connections radiators for a total choice of 1000 models
- Optionally equipped with compact plug or insert regulation valve
- Easy-to-clean thanks to removable top grills and side covers
- Convector are directly welded on the wet ducts of the radiator to minimize thermal losses and get maximum performance
- Protected against damages during transport and storage by strong packaging system
- Ferrol steel panel radiators are equipped as a standard in the package with wall brackets, fischer screws, one blind plug and one air vent. For 6-connection-radiators, such accessories are available upon request



## ACCESSORIES

|   | DESCRIPTION   |
|---|---|
|  | 4 connection models: package includes wall brackets, fischer screws, one blind plug, one air vent |
|   | 6 connection models: abovementioned accessories supplied as an option                             |

| TYPE | DESCRIPTION            | HEIGHT  |          |          |          |          |
|------|------------------------|---------|----------|----------|----------|----------|
|      |                        | 300     | 400      | 500      | 600      | 900      |
| 11   | Output $\Delta t$ 50°C | 451     | 606      | 755      | 895      | 1248     |
|      | Exponent n             | 1,31042 | 1,30793  | 1,30542  | 1,30291  | 1,30915  |
|      | Constant Km            | 2,67558 | 3,63458  | 4,57361  | 5,47064  | 7,44692  |
|      | Water content (lts)    | 1,7     | 2,1      | 2,6      | 3,0      | 1,2      |
| 20   | Output $\Delta t$ 50°C | 555     | 706      | 850      | 990      | 1394     |
|      | Exponent n             | 1,3116  | 1,30977  | 1,30794  | 1,30611  | 1,31338  |
|      | Constant Km            | 3,28268 | 4,20054  | 5,09711  | 5,98081  | 8,18149  |
|      | Water content (lts)    | 3,3     | 4,2      | 5,1      | 5,9      | 8,2      |
| 21   | Output $\Delta t$ 50°C | 722     | 927      | 1122     | 1307     | 1803     |
|      | Exponent n             | 1,31467 | 1,31913  | 1,32363  | 1,32809  | 1,34125  |
|      | Constant Km            | 4,21563 | 5,31835  | 6,32695  | 7,23965  | 9,49006  |
|      | Water content (lts)    | 3,3     | 4,2      | 5,1      | 5,9      | 8,2      |
| 22   | Output $\Delta t$ 50°C | 930     | 1195     | 1449     | 1694     | 2384     |
|      | Exponent n             | 1,30076 | 1,315    | 1,32925  | 1,34349  | 1,32728  |
|      | Constant Km            | 5,73718 | 6,97149  | 7,99442  | 8,83753  | 13,2531  |
|      | Water content (lts)    | 3,3     | 4,2      | 5,1      | 5,9      | 8,2      |
| 33   | Output $\Delta t$ 50°C | 1340    | 1723     | 2083     | 2424     | 3314     |
|      | Exponent n             | 1,30515 | 1,30686  | 1,30856  | 1,31027  | 1,33485  |
|      | Constant Km            | 8,11901 | 10,37419 | 12,45639 | 14,39815 | 17,88446 |
|      | Water content (lts)    | 4,4     | 5,8      | 7,2      | 8,6      | 12,7     |




**WF version: White**  
**CF version: Chrome**

- TALIA towel rail radiators are made of high-strength corrosion-resistant steel with the highest welding technology.
- They are available in 4 versions, straight or curved with white or chrome finish.

**Characteristics:**

- Anti-corrosion protection with special white paint RAL 9016 or chrome
- Maximum working pressure 10 bar
- Maximum working temperature 110°C
- Provided with 3 threaded joints 1/2", wall mounting brackets and air vent
- Delivery cardboard coated with polyethylene coating

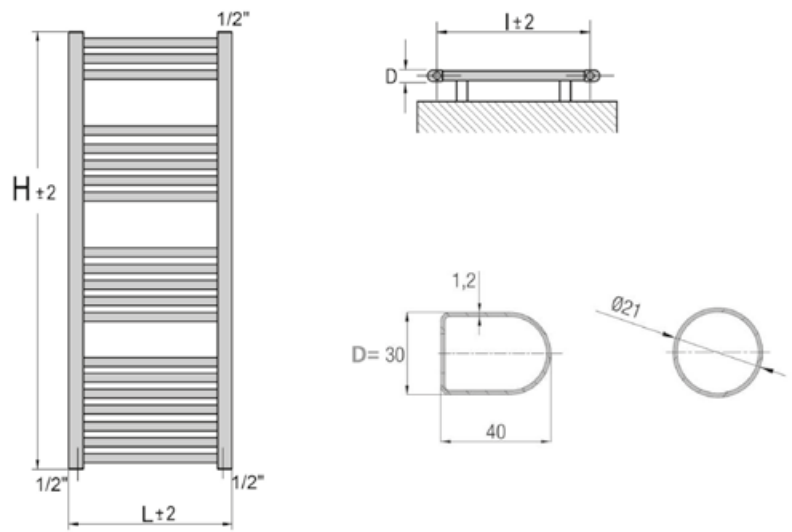

| TALIA | DIMENSIONS (mm) |        |                | EMPTY WEIGHT | WATER CONTENT | TUBES | OUTPUT (Watt) |     |     |         |     |         |     |         | EXPONENT |         | COSTANT |         |
|-------|-----------------|--------|----------------|--------------|---------------|-------|---------------|-----|-----|---------|-----|---------|-----|---------|----------|---------|---------|---------|
|       | width           | height | tapping center |              |               |       | kg            | l   | nr. | ΔT 30°C |     | ΔT 40°C |     | ΔT 50°C |          | ΔT 60°C |         | n       |
|       |                 |        |                | WF           | CF            | WF    |               |     |     | CF      | WF  | CF      | WF  | CF      | WF       | CF      | WF      | CF      |
| 40/7  | 400             | 660    | 360            | 3,0          | 2,33          | 10    | 104           | 72  | 150 | 104     | 200 | 138     | 252 | 174     | 1,27751  | 1,27687 | 1,34830 | 0,93341 |
| 40/8  | 400             | 770    | 360            | 3,5          | 2,73          | 12    | 124           | 85  | 178 | 123     | 237 | 163     | 298 | 206     | 1,26732  | 1,27303 | 1,66236 | 1,12262 |
| 40/10 | 400             | 960    | 360            | 4,2          | 3,30          | 14    | 148           | 102 | 214 | 147     | 284 | 196     | 358 | 248     | 1,26974  | 1,28703 | 1,97742 | 1,27620 |
| 40/12 | 400             | 1170   | 360            | 5,0          | 4,0           | 16    | 174           | 120 | 251 | 174     | 334 | 231     | 422 | 291     | 1,27996  | 1,27215 | 2,23535 | 1,59156 |
| 40/15 | 400             | 1460   | 360            | 6,3          | 4,77          | 21    | 224           | 154 | 323 | 223     | 428 | 296     | 540 | 373     | 1,27031  | 1,27177 | 2,97570 | 2,04317 |
| 40/18 | 400             | 1760   | 360            | 7,6          | 5,93          | 25    | 267           | 184 | 386 | 266     | 513 | 354     | 647 | 447     | 1,27567  | 1,27824 | 3,48796 | 2,38449 |
| 50/7  | 500             | 660    | 460            | 3,4          | 2,66          | 10    | 123           | 85  | 178 | 123     | 236 | 163     | 297 | 205     | 1,26797  | 1,26542 | 1,65242 | 1,15253 |
| 50/8  | 500             | 770    | 460            | 4,0          | 2,98          | 12    | 146           | 100 | 211 | 145     | 280 | 193     | 353 | 244     | 1,27479  | 1,28004 | 1,90985 | 1,29205 |
| 50/10 | 500             | 960    | 460            | 4,8          | 3,76          | 14    | 174           | 120 | 252 | 173     | 335 | 231     | 422 | 292     | 1,27449  | 1,28549 | 2,28597 | 1,51209 |
| 50/12 | 500             | 1170   | 460            | 5,6          | 4,0           | 16    | 205           | 142 | 295 | 204     | 392 | 271     | 494 | 341     | 1,27042  | 1,26825 | 2,72103 | 1,89505 |
| 50/15 | 500             | 1460   | 460            | 7,2          | 5,64          | 21    | 263           | 182 | 379 | 262     | 504 | 348     | 636 | 439     | 1,27496  | 1,27254 | 3,43864 | 2,39720 |
| 50/18 | 500             | 1760   | 460            | 8,6          | 6,74          | 25    | 315           | 217 | 454 | 313     | 603 | 416     | 760 | 525     | 1,27022  | 1,27207 | 4,18957 | 2,87229 |
| 60/7  | 600             | 660    | 560            | 3,8          | 2,99          | 10    | 142           | 98  | 204 | 141     | 272 | 188     | 343 | 237     | 1,27696  | 1,28017 | 1,83939 | 1,25431 |
| 60/8  | 600             | 770    | 560            | 4,5          | 3,51          | 12    | 168           | 116 | 243 | 167     | 323 | 223     | 408 | 282     | 1,28026  | 1,28518 | 2,15860 | 1,46222 |
| 60/10 | 600             | 960    | 560            | 5,4          | 4,22          | 14    | 200           | 139 | 289 | 200     | 385 | 266     | 486 | 335     | 1,27800  | 1,26801 | 2,59512 | 1,86348 |
| 60/12 | 600             | 1170   | 560            | 6,3          | 5,0           | 16    | 235           | 161 | 338 | 233     | 450 | 310     | 567 | 392     | 1,27299  | 1,27935 | 3,09036 | 2,08162 |
| 60/15 | 600             | 1460   | 560            | 8,1          | 6,33          | 21    | 303           | 209 | 437 | 301     | 580 | 400     | 731 | 505     | 1,27089  | 1,27310 | 4,01862 | 2,75124 |
| 60/18 | 600             | 1760   | 560            | 9,7          | 7,56          | 25    | 362           | 249 | 522 | 360     | 693 | 479     | 874 | 604     | 1,27247  | 1,27658 | 4,77393 | 3,24397 |



# SOLAR THERMAL



ERP

## PRODUCT COMPLIANT WITH ERP (ECODESIGN - LABELLING) REGULATIONS


- Minimum efficiency for DHW/heating (of 26/09/2015)
- Minimum efficiency for pump (of 01/08/2015)

|                             |     |
|-----------------------------|-----|
| ECOTECH HD SYSTEM           | 138 |
| ECOTECH G SYSTEM            | 139 |
| SOLAR COMPACT KIT           | 140 |
| ECOTOP VHM-N                | 141 |
| VERTICAL SOLAR CABINET      | 142 |
| IDRO UNITS                  | 143 |
| EXPANSION VESSELS           | 143 |
| ECOTRONIC TECH              | 144 |
| THERMOSTATIC MIXER          | 144 |
| SOLAR PROBE                 | 145 |
| STORAGE TANK PROBE          | 145 |
| FERSOL SOLAR FLUID          | 145 |
| FASTENINGS FOR SLOPED ROOFS | 146 |

# ECOTECH HD SYSTEM

## THERMOSYPHON SYSTEM (NATURAL CIRCULATION) FOR TERRACE INSTALLATION

ERP

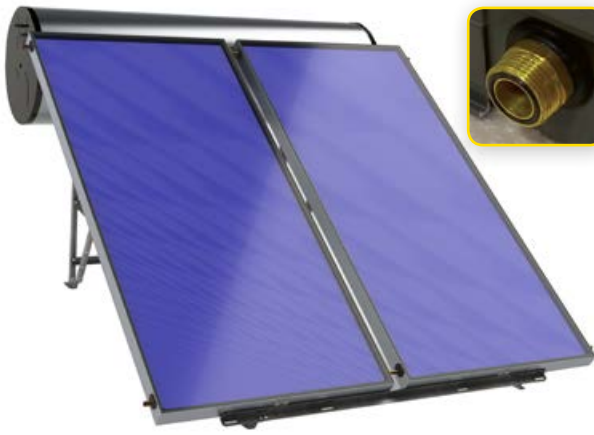

mod. HD 300

### > PRODUCT SPECIFICATIONS

- Complete system: flat collector, tank, hydraulic fittings, collector connection pipes, 8 bar pressure safety valves with non-return valve on cold water inlet; safety valve 1,7 bar solar primary circuit

#### COLLECTOR FEATURES

- Flat collectors with high efficiency
- Structure of the tub collector in dark painted aluminum
- Highly selective aluminum absorber with titanium oxide treatment
- Tempered glass, prismatic with high transparency

#### TANK FEATURES

- Storage tank for domestic hot water, with external cavity on the primary circuit side.
- Enamel surface on water side. Rigid insulation of 40 mm thickness and external finish in painted sheet steel.
- Supplied in standard configuration with magnesium anode and electrical integration resistance

| TANK FEATURES                   |               |               | 150                | 200                | 300                | 300 H              |
|---------------------------------|---------------|---------------|--------------------|--------------------|--------------------|--------------------|
| Water volume                    |               | l             | 145                | 190                | 273                | 273                |
| Primary circuit volume          |               | l             | 8,6                | 11,2               | 15,9               | 15,9               |
| Magnesium anode                 |               | diam \ length | 22 \ 500 mm        | 22 \ 650 mm        | 22 \ 790 mm        | 22 \ 790 mm        |
| Overall dimensions              | Diameter      | mm            | 560                | 560                | 560                | 560                |
|                                 | Length        | mm            | 1070               | 1315               | 1765               | 1765               |
| Collector type and quantity (*) |               |               | 1 x mod. VHM-N 2.1 | 1 x mod. VHM-N 2.1 | 2 x mod. VHM-N 2.1 | 2 x mod. VHM-N 2.7 |
| Net weight                      |               | kg            | 53                 | 72                 | 83                 | 83                 |
| Max working pressure            | Water side    | bar           | 8                  | 8                  | 8                  | 8                  |
|                                 | Heating side  | bar           | 2,0                | 2,0                | 2,0                | 2,0                |
| Electric backup capacity        |               | kW            | 2,0                | 2,0                | 3,0                | 3,0                |
| Connection                      | Water side    | type          | G 1/2" female      |                    |                    |                    |
|                                 | Heating side  | type          | G 1/2" female      |                    |                    |                    |
|                                 | Elect Heaters | type          | G 1 1/4" female    |                    |                    |                    |
| <b>SYSTEM CODE</b>              |               |               | <b>0XDC1AXA</b>    | <b>0XDC1BXA</b>    | <b>0XDC2BXA</b>    | <b>0XDC2KXA</b>    |

**IMPORTANT NOTES:** It is mandatory to install an expansion vessel on the hydraulic line of domestic hot water (at the inlet point before the storage tank) to protect the tank and the circuit in the house from pressure shocks, and to compensate overpressure in the solar storage tank which may damage or hamper the durability of flexible connection pipes into the house.

### > THE COLLECTOR (\*)

| MODEL                       |                | VHM-N 2.1   | VHM-N 2.7        |
|-----------------------------|----------------|---|------------------|
| Dimensions                  | mm             | 1017 x 2022 x 90  | 1294 x 2022 x 90 |
| Gross area of the collector | m <sup>2</sup> | 2,06  | 2,62             |
| Net useful area (absorber)  | m <sup>2</sup> | 1,93  | 2,47             |
| Total weight                | kg             | 33,7  | 41,8             |
| Stagnation temperature      | °C             | 201,2   | 201,2            |
| Solar absorption            | %              | 95  | 95               |
| Thermal emission            | %              | 5   | 5                |
| Solar collector insulation  |                | 40 mm high density mineral wool with ventilation openings |                  |

### > ACCESSORIES

| DESCRIPTION |  | CODE  |          |
|-------------|--|-------|----------|
|             | Special premixed solar fluid, ready for use, antifreeze protection to -12°C (base: Propylene-glycol, demineralized water, anti-toxic patented pink traceant for pH, specific corrosion inhibitors) | 5 kg  | 077102X0 |
|             |  | 25 kg | 077103X0 |
|             | Thermostatic mixing valve 1/2"   |       | 013002X0 |
|             | Safety temperature valve (opening temperature: 95°C)   |       | 36903300 |

# ECOTECH G SYSTEM

## THERMOSYPHON SYSTEM (NATURAL CIRCULATION) FOR TERRACE INSTALLATION

ERP



mod. G 300

### > PRODUCT SPECIFICATIONS

- Complete system: flat collector, tank, hydraulic fittings, collector connection pipes, antifreeze liquid (pure glycol to be mixed to demineralised water), 10 bar pressure safety valves with non-return valve on cold water inlet; safety valve 1,7 bar solar primary circuit

### COLLECTOR FEATURES

- Flat collectors with high efficiency with NATURAL circulation
- Structure of the tub collector in dark painted aluminum
- Highly selective aluminum absorber with titanium oxide treatment
- Tempered glass, prismatic with high transparency
- 22 mm connection / interconnection connections on the four corners of the panel

### TANK FEATURES

- Storage tank for domestic hot water, with external cavity on the primary circuit side.
- Enamel surface on water side. Rigid insulation of 40 mm thickness and external finish in painted sheet steel.
- Supplied in standard configuration with magnesium anode and electrical integration resistance

| TANK FEATURES                    |               |               | 150             | 200          | 300          | 300 H        |
|----------------------------------|---------------|---------------|-----------------|--------------|--------------|--------------|
| Water volume                     |               | l             | 144             | 199          | 295          | 295          |
| Primary circuit volume           |               | l             | 8               | 9            | 19           | 19           |
| Magnesium anode                  |               | diam \ length | 22 \ 400 mm     | 22 \ 450 mm  | 32 \ 500 mm  | 32 \ 500 mm  |
| Overall dimensions               | Diameter      | mm            | 500             | 580          | 580          | 580          |
|                                  | Length        | mm            | 1290            | 1290         | 1790         | 1790         |
| Collector type and quantity (**) |               |               | 1 x mod. 2.0    | 1 x mod. 2.0 | 2 x mod. 2.0 | 2 x mod. 2.4 |
| Net weight                       |               | kg            | 54              | 68           | 100          | 100          |
| Max operating pressure           | Water side    | bar           | 10              | 10           | 10           | 10           |
|                                  | Heating side  | bar           | 2,0             | 2,0          | 2,0          | 2,0          |
| Electric backup capacity         |               | kW            | 2,0             | 2,0          | 3,5          | 3,5          |
| Connection                       | Water side    | type          | G 1/2" female   |              |              |              |
|                                  | Heating side  | type          | G 1/2" female   |              |              |              |
|                                  | Elect Heaters | type          | G 1 1/4" female |              |              |              |
| SYSTEM CODE                      |               |               | OXED11XA        | OXED12XA     | OXED23XA     | OXED33XA     |

**IMPORTANT NOTES:** It is mandatory to install an expansion vessel on the hydraulic line of domestic hot water (at the inlet point before the storage tank) to protect the tank and the circuit in the house from pressure shocks, and to compensate overpressure in the solar storage tank which may damage or hamper the durability of flexible connection pipes into the house.

### > THE COLLECTOR (\*\*)

| MODEL                       |                | 2.0   | 2.4              |
|-----------------------------|----------------|---|------------------|
| Dimensions                  | mm             | 1960 x 960 x 80   | 1960 x 1210 x 80 |
| Gross area of the collector | m <sup>2</sup> | 1,88  | 2,37             |
| Net useful area (absorber)  | m <sup>2</sup> | 1,83  | 2,33             |
| Total weight                | kg             | 32,5  | 42               |
| Stagnation temperature      | °C             | 170   | 170              |
| Solar absorption            | %              | 95  | 95               |
| Thermal emission            | %              | 5   | 5                |
| Solar collector insulation  |                | 40 mm high density mineral wool with ventilation openings |                  |

# SOLAR COMPACT KIT

## PRE-ASSEMBLED SOLAR PACKAGE

ERP



### SINGLE-BLOCK KIT COMPOSED OF

- **Pre-assembled circulation unit** with: 1/2" safety valve, flow meter with flow regulator, system fill and drain valves, shut-off valve and pressure gauge set, solar circulator, shut-off valve, solar control unit, expansion tank for 18-lt solar circuit
- **Solar control unit** integrated with self-diagnosis function and reading of solar circuit temperature with probes (1 PT1000 probe + 1 NTC)
- **Double coil** storage tank
- **ECOTOP VHM-N 2.1** flat solar collector with non-reflective prismatic glass (vertical and horizontal installation)
- 3/4" M threaded connecting / interconnecting fittings
- Set-up for electrical heating element, 1" 1/2 fitting
- Only the monoblock can be purchased: storage tank, pump unit, control unit, vessel, **model BL 200 / 300**

NEW

NEW

| MODEL                                |                | ST 200 H        | BL 200          | ST 300 H        | BL 300          |
|--------------------------------------|----------------|-----------------|-----------------|-----------------|-----------------|
| Storage tank: ERP Class              |                | <b>C</b>        | <b>C</b>        | <b>C</b>        | <b>C</b>        |
| Storage tank: double coil            | lt             | 200             | 200             | 300             | 300             |
| Storage tank: thermal dispersion     | W              | 67              | 67              | 85              | 85              |
| Solar control unit ECOTRONIC TECH    | n              | 1               | 1               | 1               | 1               |
| Collector: ECOTOP VHM-N mod. 2.1     | n              | 1               | not provided    | 2               | not provided    |
| Collector: overall gross surface     | m <sup>2</sup> | 2.06            | 0               | 4.12            | 0               |
| Collector: overall effective surface | m <sup>2</sup> | 1.93            | 0               | 3.86            | 0               |
| <b>CODE</b>                          |                | <b>OXDU1AXA</b> | <b>OXDT0AXA</b> | <b>OXDU2BXA</b> | <b>OXDT0BXA</b> |

| CHOICE OF PRE-MIXED FLUID                                 |   | ST 200 H / BL 200 |    |    | ST 300 H / BL 300 |    |    |
|---|---|-------------------|----|----|-------------------|----|----|
| Linear set up of the pipes (delivery + return)            | m | 10                | 20 | 30 | 10                | 20 | 30 |
| Premix system/fluid content (DN 15 STAINLESS STEEL pipes) | l | 17                | 19 | 22 | 20                | 22 | 25 |

NB: To protect the system against frost, stagnation and corrosion, it is recommended to use only the pre-mixed FERSOL LT solar fluid (-12 ° C)

### > ACCESSORIES FOR COMPLETION

| ASSEMBLY FRAMES WITH VERTICAL COLLECTOR   |  | CODE     |
|---|--|----------|
| <b>BASE KIT (for all roof types) mod. 2.1</b><br><i>Order the same number as collectors</i>                                     |  | 076224X0 |
| <b>BASE KIT (for all roof types) mod. 2.7</b><br><i>Order the same number as collectors</i>                                     |  | 076225X0 |
| <b>ADDITIONAL KIT FOR FLAT ROOFS</b><br><i>Order the same number as collectors<br/>For a single collector, order nr. 2 kits</i> |  | 076226X0 |

| ASSEMBLY FRAMES WITH HORIZONTAL COLLECTOR   |  | CODE     |
|---|--|----------|
| <b>BASE KIT (for all roof types) mod. 2.1</b><br><i>Order the same number as collectors</i>   |  | 076224X0 |
| <b>BASE KIT (for all roof types) mod. 2.7</b><br><i>Order the same number as collectors</i>   |  | 076225X0 |
| <b>ADAPTATION PLATES FOR VHM-N HORIZONTALLY ON SLOPED ROOFS</b>   |  | 076228X0 |
| <b>KIT OF LEGS FOR FLAT ROOFS 2.1 / 2.7 VHM-N HORIZONTAL</b><br><i>Order the same number as collectors<br/>For a single collector, order nr. 2 kits</i> |  | 076227X0 |
| <b>INTERCONNECTION KIT VHM-N 2.1 / 2.7 HORIZONTAL</b><br><i>(nr. collectors-1)</i>  |  | 072243X0 |

| FASTENING BRACKETS FOR SLOPED ROOFS  |  | CODE     |
|--|--|----------|
| Set of flexible universal under-tile stainless steel brackets for each collector (4 pcs.)        |  | 076218X0 |
| Set of stainless steel brackets for sheet metal roofs (threaded bar) - 1st collector             |  | 076172X0 |
| Set of stainless steel brackets for sheet metal roofs (threaded bar) - coll. ADDITIONAL          |  | 076176X0 |
| Set of stainless steel brackets for sheet metal roofs (self-tapping for wood) - 1st collector    |  | 076197X0 |
| Set of stainless steel brackets for sheet metal roofs (self-tapping for wood) - coll. ADDITIONAL |  | 076198X0 |
| Set of galvanised steel brackets for flat-tiled roofs - 1st collector                            |  | 076173X0 |
| Set of galvanised steel brackets for flat tiled roofs - ADDITIONAL collector                     |  | 076175X0 |
| Set of galvanised steel brackets for round-tiled roofs - 1st collector                           |  | 076174X0 |
| Set of galvanised steel brackets for round-tiled roofs - ADDITIONAL collector                    |  | 076177X0 |
| Set of galvanised steel brackets for slate roofs - 1st collector                                 |  | 076195X0 |
| Set of galvanised steel brackets for slate roofs - ADDITIONAL collector                          |  | 076196X0 |

| DESCRIPTION  |       | CODE     |
|--|-------|----------|
| <br>Premixed solar fluid FERSOL LT (-12°C)                                       | 5 kg  | 077102X0 |
|  | 25 kg | 077103X0 |
| <br>thermostatic mixer 1/2" connections  |       | 013002X0 |
| <br>kit for automatic air relief valve with cock, ø 3/8"                         |       | 072237X0 |
| <br>2 kW electrical heating element protected by the over-temperature thermostat |       | 073107X0 |

# ECOTOP VHM-N FORCED CIRCULATION FLAT SOLAR COLLECTOR

## VERTICAL AND HORIZONTAL INSTALLATION

ERP



### > PRODUCT FEATURES

- High efficiency flat manifolds with forced circulation
- Tank collector structure in dark painted aluminium
- Frames available for **flat roof** and **sloped roof** (optional)
- **Highly selective aluminium absorber** with titanium oxide treatment
- High transparency, prismatic tempered glass
- Compliant with standard EN 12975 with "Keymark" quality certification
- **ø 3/4" M threaded connecting/interconnecting fittings**

**NEW**

| MODEL  |                | VHM-N 2.1             | VHM-N 2.7        |
|--|----------------|-----------------------|------------------|
| Dimensions (LxHxD)   | mm             | 1017 x 2022 x 90      | 1294 x 2022 x 90 |
| Gross surface area   | m <sup>2</sup> | 2.06                  | 2.62             |
| Effective surface area   | m <sup>2</sup> | 1.93                  | 2.47             |
| Empty weight   | kg             | 33.7                  | 41.8             |
| Closed circuit volume  | l              | 0.87                  | 1.1              |
| Stagnation temperature   | °C             | 201.2                 | 201.2            |
| Absorption factor  | %              | 95                    |                  |
| Emission factor  | %              | 5                     |                  |
| Thermal collector insulation                                     |                | 40 mm HD mineral wool |                  |
| Heat transfer circuit fittings                                   | Ø              | 3/4"                  |                  |
| Maximum primary circuit operating pressure                       | bar            | 10                    |                  |
| Fittings for collector   | no.            | 4                     |                  |
| Maximum collectors directly connectible in cascade configuration | no.            | 8                     | 6                |
| No. of pieces/pallet   | no.            | 8                     | 8                |
| <b>CODE</b>  |                | <b>0XDP1KXA</b>       | <b>0XDP2KXA</b>  |

### > ACCESSORIES FOR COMPLETION

| ASSEMBLY FRAMES WITH VERTICAL COLLECTOR   |  | CODE     |
|---|--|----------|
| <b>BASE KIT (for all roof types) mod. 2.1</b><br><i>Order the same number as collectors</i>   |  | 076224X0 |
| <b>BASE KIT (for all roof types) mod. 2.7</b><br><i>Order the same number as collectors</i>   |  | 076225X0 |
| <b>ADDITIONAL KIT FOR FLAT ROOFS</b><br><i>Order the same number as collectors</i><br><i>For a single collector, order 2 kits</i><br><i>For 2 collectors order 3 kits</i> |  | 076226X0 |

| FASTENING BRACKETS FOR SLOPED ROOFS  | CODE     |
|--|----------|
| Set of flexible universal under-tile stainless steel brackets for each collector (4 pcs.)        | 076218X0 |
| Set of stainless steel brackets for sheet metal roofs (threaded bar) - 1st collector             | 076172X0 |
| Set of stainless steel brackets for sheet metal roofs (threaded bar) - coll. ADDITIONAL          | 076176X0 |
| Set of stainless steel brackets for sheet metal roofs (self-tapping for wood) - 1st collector    | 076197X0 |
| Set of stainless steel brackets for sheet metal roofs (self-tapping for wood) - coll. ADDITIONAL | 076198X0 |
| Set of galvanised steel brackets for flat-tiled roofs - 1st collector                            | 076173X0 |
| Set of galvanised steel brackets for flat tiled roofs - ADDITIONAL collector                     | 076175X0 |
| Set of galvanised steel brackets for round-tiled roofs - 1st collector                           | 076174X0 |
| Set of galvanised steel brackets for round-tiled roofs - ADDITIONAL collector                    | 076177X0 |
| Set of galvanised steel brackets for slate roofs - 1st collector                                 | 076195X0 |
| Set of galvanised steel brackets for slate roofs - ADDITIONAL collector                          | 076196X0 |

| ASSEMBLY FRAMES WITH HORIZONTAL COLLECTOR  |  | CODE     |
|--|--|----------|
| <b>BASE KIT (for all roof types) mod. 2.1</b><br><i>Order the same number as collectors</i>                          |  | 076224X0 |
| <b>BASE KIT (for all roof types) mod. 2.7</b><br><i>Order the same number as collectors</i>                          |  | 076225X0 |
| <b>KIT OF ADAPTATION PLATES FOR VHM-N HORIZONTALLY ON SLOPED ROOFS</b><br><i>Order the same number as collectors</i> |  | 076228X0 |
| <b>KIT OF LEGS FOR FLAT ROOFS 2.1 / 2.7 VHM-N HORIZONTAL</b><br><i>Order the same number as collectors</i>           |  | 076227X0 |
| <b>INTERCONNECTION KIT VHM-N 2.1 / 2.7 HORIZONTAL</b><br><i>(nr. collectors-1)</i>                                   |  | 072243X0 |

|  | DESCRIPTION   |       | CODE     |
|--|---|-------|----------|
|  | premixed solar fluid<br>FERSOL LT (-12°C)                                   | 5 kg  | 077102X0 |
|  |   | 25 kg | 077103X0 |
|  | thermostatic mixer<br>1/2" connections                                      |       | 013002X0 |
|  | threaded base hydraulic connection<br>kit: "T" with probe pit, bend, 2 caps |       | 072235X0 |
|  | F-F interconnection fittings kit  |       | 072236X0 |
|  | kit for automatic air relief valve with<br>cock, ø 3/8"                     |       | 072237X0 |

# VERTICAL SOLAR CABINET

## PRE-ASSEMBLED VERTICAL CABINET FOR FORCED SOLAR SYSTEMS



### Multi-functional solar vertical cabinet pre-assembled with:

24-lt solar circuit expansion vessel, 1/2" safety valve, 18-lt DHW circuit expansion vessel, flowmeter with flow regulator, system fill and drain valves, shut-off valve and pressure gauge set, high efficiency ErP solar circulator, shut-off valve, solar control unit with self-diagnosis function and set-up for solar energy metering and reading of solar circuit temperatures with probes.

Dimensions of the solar vertical cabinet: (L x H x D= 400x1085x330).

External connection pipes not supplied

|              |                               |
|--------------|-------------------------------|
| <b>MODEL</b> | <b>VERTICAL SOLAR CABINET</b> |
| <b>CODE</b>  | <b>0X2030XA</b>               |

# SYSTEM ACCESSORIES

ERP

## > IDRO - circulation unit

IDRO 6-E



IDRO 12-E / 30-E



IDRO 70-E



- High Efficiency ErP Circulator
- Set-up for housing the Ecotronic Tech regulating control unit (optional) with digital probe temperature reading function
- System filling and draining valve (excluding mod. 70)
- Needle thermometers for system flow and return provided as per standard
- Kit for wall-hung brackets
- Expanded polypropylene insulation
- Expansion vessel fitting
- Safety unit with safety valve and pressure gauge
- Flow regulator valve with read-out
- Safety valve calibration pressure 6 bar
- Check valve provided as per standard
- Complete with manual air vent (excluding Idro 6-E) (it is advisable to install a air vent with a shut-off valve on the solar field)

| MODEL *                   |       | 6-E             | 12-E            | 30-E            | 70-E            |
|---------------------------|-------|-----------------|-----------------|-----------------|-----------------|
| Dimensions (LxHxD)        | mm    | 155x425x150     | 308x434x169     | 308x434x169     | 285x500x170     |
| Fittings nominal diameter |       | 3/4" M          | 1" M            | 1" M            | 1" 1/4 M        |
| Min/max flow rate         | l/min | 1 - 6           | 2 - 12          | 8 - 28          | 20 - 70         |
| Max operating pressure    | bar   | 8               | 8               | 8               | 8               |
| <b>CODE</b>               |       | <b>0X2022XA</b> | <b>0X2021XA</b> | <b>0X2023XA</b> | <b>0X2027XA</b> |

\* to select the IDRO unit, the maximum number of connectable collectors (after checking the pressure drops) will be calculated with the following formula:

**Coll. No. = [ l/min. idro unit x 60 min. / nominal coll. flow rate / effective coll. surf. ]** where the nominal flow rate is: **45 l/h/m<sup>2</sup>** for small d.h.w. domestic hot water production systems with flat collectors (High Flow); **30 l/h/m<sup>2</sup>** for small d.h.w. domestic hot water production systems with vacuum pipe collectors; **15 l/h/m<sup>2</sup>** for large surface systems (Low Flow)

**EXAMPLE:** IDRO 12-E and ECOTOP VHM-N flat collectors mod. 2.1 (1.83 m<sup>2</sup> effective surf.), the calculation is: **12 x 60 / 45 / 1.83 = 8.74 collectors**

## > EXPANSION VESSEL



- For high temperatures
- Resistant to high pressures
- Membrane for anti-freeze liquid
- Models 50 and 80 equipped with floor-standing feet

### > IMPORTANT

never close expansion vessels with shut-off valves

| MODEL       | 12              | 18              | 24              | 35              | 50              | 80              |
|-------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| <b>CODE</b> | <b>072101X0</b> | <b>072102X0</b> | <b>072103X0</b> | <b>072117X0</b> | <b>072118X0</b> | <b>072119X0</b> |

## > ACCESSORIES FOR COMPLETION

|  | DESCRIPTION  | CODE     |
|--|--|----------|
|  | connecting hose with fastening bracket for the vessel (excluding mod. 50 and 80) | 072120X0 |

# SYSTEM ACCESSORIES


ERP

## > ECOTRONIC TECH regulating control unit




|              |                       |
|--------------|-----------------------|
| <b>MODEL</b> | <b>ECOTRONIC TECH</b> |
| <b>CODE</b>  | <b>OX3002XA</b>       |

- Control unit for solar thermal systems for domestic hot water production with management of solar fields with **single exposure** or **double exposure**, the latter by means of a double pump or single pump/hydro and double two-way valve but with external double-input relay (not supplied) that controls the pump when the control unit opens either of the valves
- Self-diagnosis function and set-up for solar energy metering
- Polyvalent luminous display screen with system graphic symbols
- Supplied complete with 3 temperature probes as per standard (2 x PT1000 - 1 x NTC)
- Power supply range: 210-250 Volt
- Management of integrative heating (boiler) with temperature probe
- Output for the control of any collector-covering shutter (anti-stagnation)

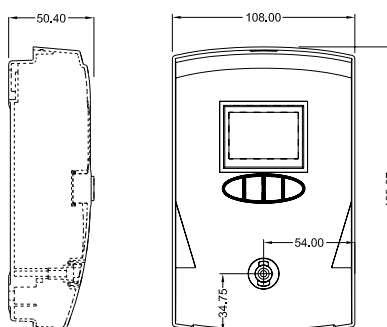

### ECOTRONIC TECH WIRING DIAGRAM


- S1 (storage tank high temperature: ex. managing integration from boiler)**  
**PT 1000** (supplied with ECOTRONIC TECH \* : 2.5 m cable; 40 mm head) to manage integration with boiler directly from the solar control unit  
**NTC** (if the probe is cabled in the boiler) Note: if integration is managed at the top of the storage tank by wiring the probe in the boiler, it is necessary to use the optional NTC probe: art. 1KWMA11W  
*\* not included in the standard supply of the "solar vertical cabinet kit" - in this case to manage the integration it is necessary to purchase a PT 1000 probe separately (art. 043007X0) and connect it to the ECOTRONIC TECH control unit or an NTC probe (art. 1KWMA11W) and connect it to the boiler*
- S2 (storage tank low temperature: solar differential probe)**  
**NTC** (supplied with ECOTRONIC TECH, 2.5 m cable; 32 mm head)
- S3 (delivery from the solar field)**  
**PT 1000** (supplied with ECOTRONIC TECH, 2.5 m cable; 40 mm head)
- S4 Solar energy metering \*\***  
**NTC** (optional \*\*\* : art. 1KWMA11W; 2 m cable, 32 mm head)  
*\*\* only with flow meter accessory (not supplied) - function not implemented in the "solar vertical cabinet" kit  
 \*\*\* except for the "solar vertical cabinet" KIT where it is provided as per standard and already wired with variable flow management function*
- S5 (double exposure/double solar field management)**  
**PT 1000** (supplied) Note: this option is not compatible with the S1 probe wiring on Electronic Tech (in fact that PT 1000 probe is used as S5 instead of S1) and it is not compatible with the use of S4 (in fact this option is not feasible with the "forced solar vertical cabinet" where there is already S4)

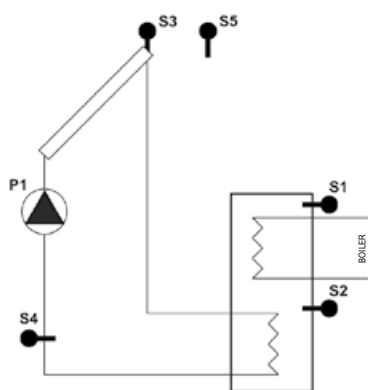

## > THERMOSTATIC MIXER



- Adjustment range: 30-65°C
- Limescale thermostatic mixer, adjustable
- 1/2" diameter, chrome-plated
- Compliant with EN 12165
- **Max inlet temperature: 100°C**
- Maximum operating pressure: 5 bar
- Two check valves included



| DIMENSIONS (mm) |    |     |     |      |      |
|-----------------|----|-----|-----|------|------|
| A               | B  | C   | D   | E    | F    |
| 1/2"            | 67 | 134 | 152 | 86.5 | 65.5 |

|              |                           |
|--------------|---------------------------|
| <b>MODEL</b> | <b>THERMOSTATIC MIXER</b> |
| <b>CODE</b>  | <b>013002X0</b>           |




# SYSTEM ACCESSORIES

ERP

## > SOLAR PROBE: PT1000



- AISI 304 Ø 6x50 mm pipe (1 knurling)
- PT1000 probe  $\Omega$  at 0°C according to IEC 751 class B
- Silicone two-pole cable 22 AWG; L=2500 mm
- Operating temperature: -20 - +180°C
- Maximum temperature: 200°C (2 min.)




|       |          |
|-------|----------|
| MODEL | PT 1000  |
| CODE  | 043007X0 |

## > STORAGE TANK PROBE: NTC



- Material: copper
- Insulation voltage: 1500 V
- Resistance at 25°C: 10000  $\Omega$



|       |          |          |
|-------|----------|----------|
| MODEL | NTC 2 m  | NTC 5 m  |
| CODE  | 1KWMA11W | 043005X0 |

## > FERSOL pre-mixed solar fluid



### > FERSOL LT

Specific heat transfer fluid ready for use for solar systems with high summer temperatures and moderate risk of frost. Specific **premixed** product based on demineralised water, non-toxic propylene glycol with antifreeze function (-12°C) and thermostable corrosion inhibitors at the stagnation temperatures typical of solar collectors. When the special additional colouring changes from purple to neutral, this means that the fluid needs to be changed. Not usable for project temperature -12°C

|       |          |          |
|-------|----------|----------|
| MODEL | LT 5 KG  | LT 25 KG |
| CODE  | 077102X0 | 077103X0 |

# FASTENINGS FOR SLOPED ROOFS

ERP



## > UNIVERSAL CAPTIVE BARS

Stainless steel fastening system with captive bar (M12x250 mm) for ECOTECH N/G (all models)\*, ECOTOP.

Stainless steel fastening system with self-tapping bar for wood (M12x120 mm) for ECOTECH N/G (mod. 150 and 200), ECOTOP.

Specific kit for fastening on concrete tiles, bituminous tiles, flat or corrugated metal roofing; can also be used for all other types of roofing and tiles with a captive (lock nut required under-roof) or self-tapping bolt for wood (requires fischer plug).

\* For installation on roof pitch, purchase 1 kit code 076172X0 plus 1 kit for additional collector code 076176X0 (mod. 250)




| THREADED | 1ST COLLECTOR | ADDITIONAL COLLECTOR |
|----------|---------------|----------------------|
| CODE     | 076172X0      | 076176X0             |

| SELF-TAPPING | 1ST COLLECTOR | ADDITIONAL COLLECTOR |
|--------------|---------------|----------------------|
| CODE         | 076197X0      | 076198X0             |

## > UNIVERSAL BRACKETS FOR UNDER-TILE



Flexible stainless steel under-tile universal fastening system (set of 4 pieces) for ECOTOP. Kit suitable for all types of roofs with tiles



| MODEL | EACH COLLECTOR |
|-------|----------------|
| CODE  | 076218X0       |

## > BRACKETS FOR FLAT TILES


Galvanised steel fastening system for ECOTOP. Kit suitable for roofs with flat tiles ("Marseille" type)



| MODEL | 1ST COLLECTOR | ADDITIONAL COLLECTOR |
|-------|---------------|----------------------|
| CODE  | 076173X0      | 076175X0             |

## > BRACKETS FOR CURVED TILES


Adjustable galvanised steel fastening system for ECOTOP. Kit suitable for roofs with curved tiles (round tiles)



| MODEL | 1ST COLLECTOR | ADDITIONAL COLLECTOR |
|-------|---------------|----------------------|
| CODE  | 076174X0      | 076177X0             |

## > BRACKETS FOR SLATE TILES

Adjustable galvanised steel fastening system for ECOTOP. Kit suitable for roofs with slate tiles



| MODEL | 1ST COLLECTOR | ADDITIONAL COLLECTOR |
|-------|---------------|----------------------|
| CODE  | 076195X0      | 076196X0             |

# PUFFERS AND STORAGE



## PRODUCT COMPLIANT WITH ERP (ECODESIGN - LABELLING) REGULATIONS

- Minimum efficiency for DHW/heating (of 26/09/2015)
- Minimum efficiency for pump (of 01/08/2015)

|               |     |
|---------------|-----|
| ECOGEO H-1 P  | 148 |
| ECOGEO H-2 PC | 149 |
| ECOGEO H-2 SP | 150 |
| ECOUNTIT F    | 151 |
| ECOUNTIT H    | 152 |
| ECOUNTIT H1   | 153 |
| ECOUNTIT H2   | 154 |
| ECOTANK H     | 155 |
| ECOMULTI H    | 156 |
| ECOMULTI H1   | 157 |
| ECOMULTI H2   | 158 |
| ECOPUFFER H   | 159 |
| ECOPUFFER H1  | 160 |

# ECOGEO H-1 P INTEGRATED DHW STORAGE TANK FOR HEAT PUMP

ERP



## > PRODUCT FEATURES

ECOGEO H-1 P is a vertical hot water storage tank.


This unit is designed to heat domestic hot water in combination with a heat pump.

The units can be equipped with a series of electric heaters as an additional source of heating.

Steel tanks (S235JR) manufactured with glazed steel, which can be inspected through a flange installed at the top of the tank and featuring fixed single heat exchanger.

The tank is protected by a layer of porcelain glaze that guarantees a long service life.

The glazing and magnesium anode sizing processes (provided as standard) observe DIN 4753 50 mm expanded polyurethane insulation and external ABS grey RAL 9006

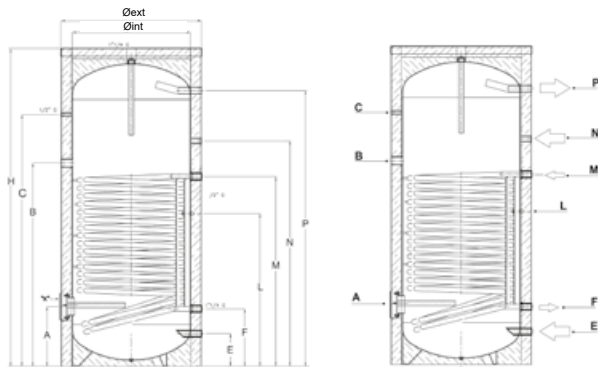

| TYPE OF FITTING |   | 200-1         | 300-1 | 500-1    |
|-----------------|---|---------------|-------|----------|
| <b>A</b>        | Flange                                    | mm 257        | 270   | 360      |
| <b>B</b>        | Connection for electrical heating element | mm 940        | 1150  | 1335     |
|                 |   | type 1 1/2" G |       |          |
| <b>C</b>        | Pit for thermometer                       | mm 1040       | 1430  | 1475     |
|                 |   | type 1/2" G   |       |          |
| <b>E</b>        | Cold water inlet                          | mm 67         | 67    | 175      |
|                 |   | type 1 1/2" G |       | 1 1/4" G |
| <b>F</b>        | HP Return                                 | mm 210        | 230   | 295      |
|                 |   | type 1 1/4" G |       |          |
| <b>L</b>        | Probe pit                                 | mm 593        | 653   | 825      |
|                 |   | type 1/2" G   |       |          |
| <b>M</b>        | HP inlet                                  | mm 890        | 1080  | 1235     |
|                 |   | type 1 1/4" G |       |          |
| <b>N</b>        | Recirculation connection                  | mm 990        | 1200  | 1375     |
|                 |   | type 3/4" G   |       | 1" G     |
| <b>P</b>        | Hot water output                          | mm 1164       | 1609  | 1595     |
|                 |   | type 1 1/2" G |       |          |

| GENERAL DATA                       |                   | 200-1           | 300-1           | 500-1           |
|------------------------------------|-------------------|-----------------|-----------------|-----------------|
| ERP Class                          | (Class F - A*)    | <b>C</b>        | <b>C</b>        | <b>C</b>        |
| Total volume                       | l                 | 192             | 276             | 473             |
| Thermal dispersion                 | W                 | 66              | 81              | 102             |
| External diameter                  | mm                | 605             | 605             | 750             |
| Total height                       | mm                | 1265            | 1710            | 1785            |
| Coil surface                       | m <sup>2</sup>    | 3.0             | 3.8             | 5.9             |
| Coil water content                 | l                 | 18.5            | 23.1            | 36.3            |
| Exchangeable coil power            | kW                | 47              | 59              | 92              |
| Coil domestic hot water production | m <sup>3</sup> /h | 1.1             | 1.4             | 2.2             |
| Necessary flow rate to the coil    | m <sup>3</sup> /h | 4.1             | 5.1             | 7.9             |
| Coil pressure drops                | kPa               | 0.74            | 0.94            | 1.42            |
| Maximum pressure in the tank       | bar               |                 | 10              |                 |
| Maximum pressure in the coil       | bar               |                 | 10              |                 |
| Maximum temperature in the tank    | °C                |                 | 95              |                 |
| Maximum temperature in the coil    | °C                |                 | 110             |                 |
| Empty weight                       | Kg                | 105             | 130             | 230             |
| <b>CODE</b>                        |                   | <b>20Z14A00</b> | <b>20Z14A10</b> | <b>20Z14A20</b> |

# ECOGEO H-2 PC INTEGRATED DHW STORAGE TANK FOR HEAT PUMP AND BOILER

ERP



## > PRODUCT FEATURES

ECOGEO H-2 PC is a vertical hot water storage tank.

This unit is designed to produce domestic hot water in combination with a heat pump and a traditional gas boiler.



The units can be equipped with a series of electric heaters as an additional source of heating.

Steel tanks (S235JR) manufactured with glazed steel, which can be inspected through a flange installed at the top of the tank and featuring fixed double heat exchanger.

The tank is protected by a layer of porcelain glaze that guarantees a long service life.

The glazing and magnesium anode sizing processes (provided as standard) observe DIN 4753.

50 mm expanded polyurethane insulation and external ABS grey RAL 9006

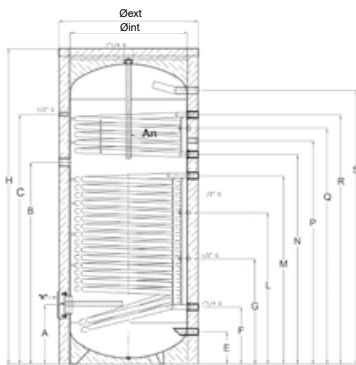

| TYPE OF FITTING |   | 350-2        | 500-2 |
|-----------------|---|--------------|-------|
| <b>A</b>        | Flange                                    | mm 360       | 380   |
| <b>B</b>        | Connection for electrical heating element | mm 950       | 1205  |
|                 |   | type 1 1/2 G |       |
| <b>C</b>        | Pit for thermometer                       | mm 1295      | 1495  |
|                 |   | type 1/2" G  |       |
| <b>E</b>        | Cold water inlet                          | mm 175       | 175   |
|                 |   | type 1 1/4 G |       |
| <b>F</b>        | HP Return                                 | mm 295       | 295   |
|                 |   | type 1 1/4 G |       |
| <b>G</b>        | Probe pit                                 | mm 490       | 575   |
|                 |   | type 1/2" G  |       |
| <b>L</b>        | Probe pit                                 | mm 690       | 865   |
|                 |   | type 1/2" G  |       |
| <b>M</b>        | HP delivery                               | mm 885       | 1130  |
|                 |   | type 1 1/4 G |       |
| <b>N</b>        | Auxiliary Source Return                   | mm 1035      | 1265  |
|                 |   | type 1 1/4 G |       |
| <b>P</b>        | Recirculation connection                  | mm 1140      | 1420  |
|                 |   | type 1" G    |       |
| <b>Q</b>        | Probe pit                                 | mm 1175      | 1405  |
|                 |   | type 1/2" G  |       |
| <b>R</b>        | Auxiliary Source Delivery                 | mm 1245      | 1475  |
|                 |   | type 1 1/4 G |       |
| <b>S</b>        | Hot water output                          | mm 1395      | 1595  |
|                 |   | type 1 1/4 G |       |

| GENERAL DATA                             |                   | 350-2           | 500-2           |
|--|-------------------|-----------------|-----------------|
| ERP Class                                | (Class F - A*)    | <b>C</b>        | <b>C</b>        |
| Total volume                             | l                 | 350             | 500             |
| Thermal dispersion                       | W                 | 96              | 104             |
| External diameter                        | mm                | 750             | 750             |
| Total height                             | mm                | 1580            | 1780            |
| Lower coil surface                       | m <sup>2</sup>    | 4.6             | 5.5             |
| Lower coil water content                 | l                 | 24.7            | 35              |
| Low coil exchangeable power              | kW                | 82              | 115             |
| Lower coil domestic hot water production | m <sup>3</sup> /h | 2               | 2.8             |
| Necessary flow rate to lower coil        | m <sup>3</sup> /h | 14              | 19.8            |
| Lower coil pressure drops                | kPa               | 0.97            | 1.38            |
| Upper coil surface                       | m <sup>2</sup>    | 0.9             | 0.9             |
| Upper coil water content                 | l                 | 5.3             | 5.3             |
| Upper coil exchangeable power            | kW                | 27              | 27              |
| Upper coil domestic hot water production | m <sup>3</sup> /h | 0.7             | 0.7             |
| Necessary flow rate to upper coil        | m <sup>3</sup> /h | 1.1             | 1.1             |
| Upper coil pressure drops                | kPa               | 0.68            | 0.68            |
| Maximum pressure in the tank             | bar               |                 | 10              |
| Maximum pressure in the coil             | bar               |                 | 10              |
| Maximum temperature in the tank          | °C                |                 | 95              |
| Maximum temperature in the coil          | °C                |                 | 110             |
| Empty weight                             | Kg                | 175             | 210             |
| <b>CODE</b>                              |                   | <b>20Z14A30</b> | <b>20Z14A40</b> |



# ECOGEO H-2 SP DHW STORAGE TANK FOR USE WITH HEAT PUMPS AND SOLAR THERMAL SYSTEMS

ERP



## > PRODUCT FEATURES

ECOGEO H-2 SP is a vertical hot water storage tank. This unit is designed to produce domestic hot water in combination with a heat pump and a solar circuit. The units can be equipped with a series of electric heaters as an additional source of heating. Steel tanks (S235JR) manufactured with glazed steel, which can be inspected through a flange installed at the top of the tank and featuring fixed double heat exchanger. The tank is protected by a layer of porcelain glaze that guarantees a long service life. The glazing and magnesium anode sizing processes (provided as standard) observe DIN 4753. 50 mm expanded polyurethane insulation and external ABS grey RAL 9006

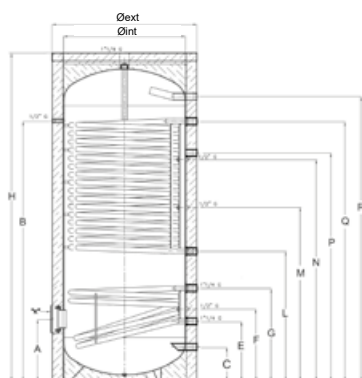

| TYPE OF FITTING   |      | 350-2   | 500-2 |
|---|------|---------|-------|
| <b>A</b> Flange + Connection for electrical heating element | mm   | 565     | 565   |
|   | type | 1"1/2 G |       |
| <b>B</b> Pit for thermometer                                | mm   | 1295    | 1495  |
|   | type | 1/2" G  |       |
| <b>C</b> Cold water inlet                                   | mm   | 175     | 175   |
|   | type | 1"1/4 G |       |
| <b>E</b> Solar circuit return                               | mm   | 295     | 295   |
|   | type | 1"1/4 G |       |
| <b>F</b> Solar probe pit                                    | mm   | 395     | 395   |
|   | type | 1/2" G  |       |
| <b>G</b> Solar circuit delivery                             | mm   | 505     | 505   |
|   | type | 1"1/4 G |       |
| <b>L</b> HP Return  | mm   | 625     | 625   |
|   | type | 1"1/4 G |       |
| <b>P</b> Recirculation connection                           | mm   | 1036    | 1235  |
|   | type | 1" G    |       |
| <b>M</b> Heating probe pit                                  | mm   | 845     | 910   |
|   | type | 1/2" G  |       |
| <b>N</b> Pit for thermometer                                | mm   | 1065    | 1195  |
|   | type | 1/2" G  |       |
| <b>Q</b> HP delivery  | mm   | 1275    | 1475  |
|   | type | 1"1/4 G |       |
| <b>S</b> Hot water output                                   | mm   | 1395    | 1595  |
|   | type | 1"1/4 G |       |

| GENERAL DATA                             |                   | 350-2           | 500-2           |
|--|-------------------|-----------------|-----------------|
| ERP Class                                | (Class F - A*)    | <b>C</b>        | <b>C</b>        |
| Total volume                             | l                 | 350             | 500             |
| Thermal dispersion                       | W                 | 94              | 103             |
| External diameter                        | mm                | 760             | 760             |
| Total height                             | mm                | 1580            | 1780            |
| Lower coil surface                       | m <sup>2</sup>    | 0.9             | 0.9             |
| Lower coil water content                 | l                 | 5.3             | 5.3             |
| Low coil exchangeable power              | kW                | 27              | 27              |
| Lower coil domestic hot water production | m <sup>3</sup> /h | 0.7             | 0.7             |
| Necessary flow rate to lower coil        | m <sup>3</sup> /h | 1.1             | 1.1             |
| Lower coil pressure drops                | kPa               | 0.68            | 0.68            |
| Upper coil surface                       | m <sup>2</sup>    | 4.6             | 5.5             |
| Upper coil water content                 | l                 | 25              | 34              |
| Upper coil exchangeable power            | kW                | 72              | 86              |
| Upper coil domestic hot water production | m <sup>3</sup> /h | 1.7             | 2.1             |
| Necessary flow rate to upper coil        | m <sup>3</sup> /h | 6.2             | 7.4             |
| Upper coil pressure drops                | kPa               | 0.97            | 1.33            |
| Maximum pressure in the tank             | bar               |                 | 10              |
| Maximum pressure in the coil             | bar               |                 | 10              |
| Maximum temperature in the tank          | °C                |                 | 95              |
| Maximum temperature in the coil          | °C                |                 | 110             |
| Empty weight                             | Kg                | 177             | 215             |
| <b>CODE</b>                              |                   | <b>20Z14980</b> | <b>20Z14990</b> |

# ECOUNTIT F SINGLE/DOUBLE COIL STORAGE TANKS

ERP




## > PRODUCT FEATURES

- Vertical storage tanks for DHW, with single coil (**version 1C**) or with double coil (**version 2C**), in enamelled steel.
- Glass-porcelain steel storage tank, 50mm rigid insulation and external finish of white painted steel sheeting
- Supplied in standard configuration with magnesium anode and integrating electrical heating element of 1500W and adjustable from 15°C to 75°C
- Fitting for recirculation


| DIMENSIONS (mm) |        |        |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|                 | 100-1C | 150-1C | 200-1C | 300-1C | 400-1C | 500-1C | 200-2C | 300-2C | 400-2C | 500-2C |
| A               | 500    | 500    | 540    | 620    | 750    | 750    | 540    | 620    | 750    | 750    |
| B               | 978    | 1325   | 1453   | 1535   | 1469   | 1769   | 1453   | 1535   | 1469   | 1769   |
| C               | 870    | 1216   | 1344   | 1431   | 1326   | 1626   | 1344   | 1431   | 1326   | 1626   |
| D               | 736    | 1088   | 1084   | 1161   | 985    | 1261   | 1234   | 1311   | 1174   | 1474   |
| E               | 636    | 988    | 984    | 1061   | 885    | 1161   | 1134   | 1211   | 1074   | 1374   |
| F               | 536    | 888    | 884    | 961    | 785    | 1061   | 1034   | 1111   | 974    | 1274   |
| G               | 336    | 336    | 334    | 361    | 441    | 441    | 934    | 961    | 852    | 1152   |
| H               | 236    | 236    | 234    | 261    | 341    | 341    | 834    | 861    | 752    | 1052   |
| I               | 126    | 126    | 124    | 131    | 155    | 155    | 734    | 761    | 661    | 898    |
| J               | -      | -      | -      | -      | -      | -      | 234    | 261    | 391    | 398    |
| K               | -      | -      | -      | -      | -      | -      | 124    | 131    | 291    | 298    |
| L               | -      | -      | -      | -      | -      | -      | 324    | 351    | 155    | 155    |
| M               | 400    | 400    | 440    | 520    | 650    | 650    | 440    | 520    | 650    | 650    |
| N               | 326    | 326    | 324    | 351    | 418    | 418    | 324    | 351    | 418    | 418    |

| TYPE OF FITTING |        |        |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|                 | 100-1C | 150-1C | 200-1C | 300-1C | 400-1C | 500-1C | 200-2C | 300-2C | 400-2C | 500-2C |
| DHW             | 3/4"   | 3/4"   | 3/4"   | 1"     | 1"     | 1"     | 3/4"   | 1"     | 1"     | 1"     |
| coil/s          | 3/4"   | 3/4"   | 3/4"   | 1"     | 1"     | 1"     | 3/4"   | 3/4"   | 1"     | 1"     |
| recirculation   | 3/4"   | 3/4"   | 3/4"   | 1"     | 1"     | 1"     | 3/4"   | 3/4"   | 3/4"   | 3/4"   |

### ECOUNTIT F VERSION 1C

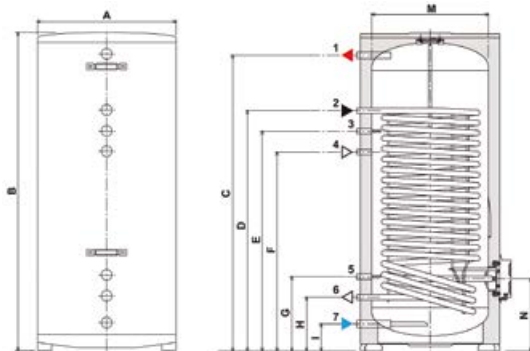

### ECOUNTIT F VERSION 2C

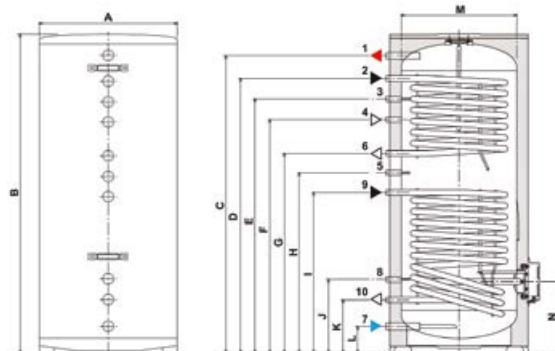

#### > KEY

- Hot water outlet
- Boiler inlet
- Probe
- Recirculation
- Probe
- Boiler outlet
- Cold water inlet
- Probe
- Solar inlet
- Solar outlet

| MODEL                      |                   | SINGLE COIL     |                 |                 |                 |                 |                 | DOUBLE COIL     |                 |                 |                 |
|----------------------------|-------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|                            |                   | 100-1C          | 150-1C          | 200-1C          | 300-1C          | 400-1C          | 500-1C          | 200-2C          | 300-2C          | 400-2C          | 500-2C          |
| ERP Class                  | (Class F - A*)    | <b>C</b>        | <b>C</b>        | <b>C</b>        | <b>C</b>        | <b>C</b>        | <b>C</b>        | <b>C</b>        | <b>C</b>        | <b>C</b>        | <b>C</b>        |
| Capacity                   | l                 | 89              | 129             | 173             | 261             | 335             | 460             | 174             | 262             | 356             | 461             |
| Exchange surface (upp/low) | m <sup>2</sup>    | 0.74            | 1.25            | 1.4             | 1.83            | 2.37            | 3.39            | 0.5/0.83        | 0.72/1          | 1.19/1.52       | 1.19/2.2        |
| Power (Δt 35°C - upp/low)  | KW                | 18.5            | 31.25           | 35              | 45.75           | 59.25           | 84.75           | 12.5/20.75      | 18/25           | 29.6/38.1       | 29.6/55         |
| Pressure drops (upp/low)   | mbar              | 228             | 386             | 432             | 565             | 118             | 167             | 155/254         | 220/308         | 58/75           | 58/109          |
| Coil surface (upp/low)     | m <sup>2</sup>    | 0.74            | 1.25            | 1.4             | 1.83            | 2.37            | 3.39            | 0.5 / 0.83      | 0.72 / 1        | 1.19 / 1.52     | 1.19 / 2.2      |
| Thermal dispersion 65°C    | kWh/24h           | 1.6             | 1.8             | 2.2             | 2.7             | 2.9             | 3.5             | 2.2             | 2.7             | 2.9             | 3.5             |
| Max operating temperature  | °C                | 95              | 95              | 95              | 95              | 95              | 95              | 95              | 95              | 95              | 95              |
| Primary flow rate          | m <sup>3</sup> /h | 2               | 2               | 2               | 2               | 2               | 2               | 2               | 2               | 3               | 3               |
| Max operating pressure     | bar               | 8               | 8               | 8               | 8               | 8               | 8               | 8               | 8               | 8               | 8               |
| Empty weight               | kg                | 45              | 64              | 73              | 103             | 126             | 155             | 73              | 102             | 126             | 155             |
| <b>CODE</b>                |                   | <b>GRZ1010A</b> | <b>GRZ3010A</b> | <b>GRZ4110A</b> | <b>GRZ6310A</b> | <b>GRZ7410A</b> | <b>GRZ8410A</b> | <b>GRZ4120A</b> | <b>GRZ6320A</b> | <b>GRZ7420A</b> | <b>GRZ8420A</b> |



# ECOUNTIT H



## STORAGE TANKS FOR STORAGE OF DHW

### > PRODUCT FEATURES

ECOUNTIT H is a vertical hot water storage tank designed for domestic hot water heating. The units can be equipped with a series of electric heaters as a source of heating. Enamelled steel tank (S235JR) with 200 to 3000-litre capacity which can be inspected through a flange installed at the bottom of the tank. The tank is protected by a layer of porcelain glaze that guarantees a long service life. The magnesium anode sizing process (provided as per standard) observes DIN 4753 P.3. Thermal insulation is achieved through PU direct foam for models up to 500 litres. Hard PU jackets for the 750 and 1000 lt models and polyester fibre for the 1500 to 3000 lt models. The outer casing is made with coupled PVC.

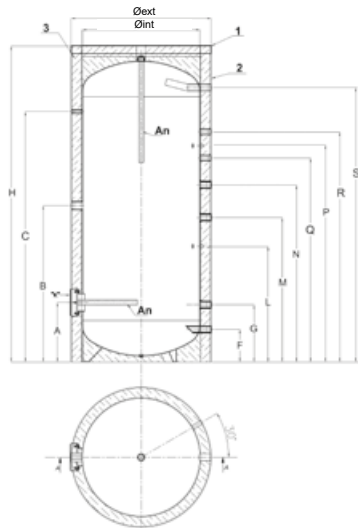

| TYPE OF FITTING |   | 200     | 300  | 400  | 500  | 750  | 1000 | 1500 | 2000 | 2500 | 3000 |
|-----------------|---|---------|------|------|------|------|------|------|------|------|------|
| <b>A</b>        | Flange                                    | mm 257  | 257  | 268  | 335  | 400  | 400  | 520  | 550  | 640  | 640  |
| <b>B</b>        | Connection for electrical heating element | mm 629  | 914  | 891  | 949  | 890  | 890  | 1255 | 1310 | 1400 | 1400 |
| <b>C</b>        | Pit for thermometer                       | mm 929  | 1384 | 1411 | 1480 | 1460 | 1680 | 1825 | 2090 | 2130 | 2430 |
| <b>F</b>        | Cold water inlet                          | mm 110  | 110  | 120  | 175  | 220  | 220  | 315  | 340  | 430  | 430  |
| <b>G</b>        | Free connection                           | mm 264  | 264  | 286  | 305  | 385  | 385  | 470  | 460  | 550  | 550  |
| <b>L</b>        | Probe pit                                 | mm 474  | 654  | 660  | 685  | 685  | 685  | 945  | 985  | 1075 | 1075 |
| <b>M</b>        | Free connection                           | mm 579  | 849  | 846  | 865  | 835  | 835  | 1180 | 1160 | 1250 | 1300 |
| <b>N</b>        | Free connection                           | mm 679  | 979  | 1011 | 985  | 990  | 990  | 1330 | 1450 | 1540 | 1790 |
| <b>Q</b>        | Recirculation connection                  | mm 884  | 1141 | 1163 | 1235 | 1235 | 1235 | 1460 | 1650 | 1740 | 2040 |
| <b>P</b>        | Heating probe pit                         | mm 914  | 1214 | 1245 | 1285 | 1340 | 1340 | 1600 | 1825 | 1905 | 2205 |
| <b>R</b>        | Free connection                           | mm 994  | 1294 | 1361 | 1335 | 1440 | 1440 | 1735 | 2000 | 2040 | 2340 |
| <b>S</b>        | Hot water output                          | mm 1120 | 1565 | 1540 | 1595 | 1590 | 1840 | 1935 | 2210 | 2250 | 2550 |

| MODEL                            |                | 200      | 300      | 400      | 500      | 750      | 1000     | 1500     | 2000     | 2500     | 3000     |
|----------------------------------|----------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| ERP Class                        | (Class F - A*) | <b>C</b> | <b>C</b> | <b>C</b> | <b>C</b> | N.A.     | N.A.     | N.A.     | N.A.     | N.A.     | N.A.     |
| Capacity                         | l              | 212      | 297      | 420      | 513      | 763      | 885      | 1494     | 2013     | 2408     | 2841     |
| Diameter with thermal insulation | ø mm           | 600      | 600      | 700      | 750      | 950      | 950      | 1200     | 1300     | 1400     | 1400     |
| Total height with insulation     | mm             | 1265     | 1710     | 1655     | 1785     | 1845     | 2095     | 2285     | 2550     | 2680     | 2980     |
| Empty weight                     | kg             | 58       | 76       | 91       | 103      | 173      | 194      | 322      | 396      | 524      | 579      |
| Thermal dispersion               | W              | 74       | 88       | 105      | 116      | 115      | 125      | 146      | 172      | 330      | 354      |
| Max storage tank pressure        | bar            | 10       |          |          |          |          |          |          |          |          |          |
| Max boiler operating temperature | °C             | 95       |          |          |          |          |          |          |          |          |          |
| CODE                             |                | OYHA3AXA | OYHA4AXA | OYHA5AXA | OYHA6AXA | OYHA8AXA | OYHA9AXA | OYHABAXA | OYHACAXA | OYHAEAXA | OYHADAXA |



# ECOUNT H-1

ERP



## STORAGE TANKS WITH SINGLE COIL

### > PRODUCT FEATURES

ECOUNT H-1 is a vertical single-coil hot water storage tank.

This unit is designed for heating domestic hot water with one energy source and a DHW system, compatibly with the performance and power characteristics.

Enamelled steel tanks (S235JR) with 750 to 3000-litre capacity which can be inspected through a flange installed at the bottom of the tank and featuring one fixed heat exchanger.


These models are used for the production of domestic hot water with a source of solar energy or boiler.

The tank is protected by a layer of porcelain glaze that guarantees a long service life.

The glazing and magnesium anode sizing processes (provided as standard) observe DIN 4753 P.3.

Hard PU jackets for the 750 and 1000 lt models and polyester fibre for the 1500 to 3000 lt models.

The outer casing is coupled PVC.

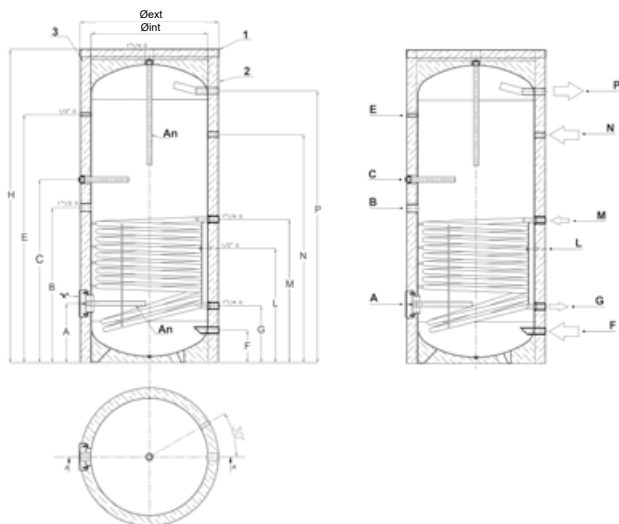

| TYPE OF FITTING |   | 750     | 1000 | 1500 | 2000 | 2500 | 3000 |
|-----------------|---|---------|------|------|------|------|------|
| <b>A</b>        | Flange                                    | mm 400  | 400  | 520  | 550  | 640  | 640  |
| <b>B</b>        | Connection for electrical heating element | mm 1050 | 1050 | 1255 | 1310 | 1500 | 1400 |
| <b>C</b>        | Connection for anode                      | mm \    | \    | \    | \    | \    | 1640 |
| <b>E</b>        | Pit for thermometer                       | mm 1430 | 1680 | 1825 | 2090 | 2130 | 2430 |
| <b>F</b>        | Cold water inlet                          | mm 220  | 220  | 315  | 340  | 430  | 430  |
| <b>G</b>        | Heating return                            | mm 385  | 385  | 470  | 460  | 550  | 550  |
| <b>L</b>        | Heating probe pit                         | mm 775  | 870  | 943  | 985  | 1075 | 1075 |
| <b>M</b>        | Heating delivery                          | mm 970  | 970  | 1180 | 1160 | 1250 | 1300 |
| <b>N</b>        | Recirculation connection                  | mm 1350 | 1545 | 1460 | 1650 | 1740 | 2040 |
| <b>P</b>        | Hot water output                          | mm 1590 | 1840 | 1935 | 2210 | 2250 | 2550 |

| MODEL                            |                   | 750-1           | 1000-1          | 1500-1          | 2000-1          | 2500-1          | 3000-1          |
|----------------------------------|-------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| ERP Class                        | (Class F - A*)    | N.A.            | N.A.            | N.A.            | N.A.            | N.A.            | N.A.            |
| Capacity                         | l                 | 748             | 868             | 1466            | 1977            | 2479            | 2809            |
| Diameter with thermal insulation | ø mm              | 950             | 950             | 1200            | 1300            | 1400            | 1400            |
| Total height with insulation     | mm                | 1845            | 2095            | 2285            | 2550            | 2680            | 2980            |
| Exchange surface                 | m <sup>2</sup>    | 2.5             | 2.5             | 4.2             | 4.5             | 4.8             | 5.2             |
| Coil water content               | l                 | 15.0            | 15.0            | 25.4            | 28.0            | 29.5            | 31.6            |
| Absorbed power                   | kW                | 74.1            | 74.1            | 124.5           | 133.4           | 142.3           | 154.2           |
| Necessary flow rate to the coil  | m <sup>3</sup> /h | 1.8             | 1.8             | 3.06            | 3.3             | 3.5             | 3.8             |
| DHW production 80/60°C - 10/45°C | m <sup>3</sup> /h | 3.2             | 3.2             | 5.4             | 5.7             | 6.1             | 6.6             |
| Pressure drops                   | kPa               | 1.90            | 1.90            | 3.23            | 3.56            | 3.76            | 4.03            |
| Empty weight                     | kg                | 206             | 227             | 380             | 458             | 593             | 653             |
| Thermal dispersion               | W                 | 113             | 121             | 153             | 180             | 282             | 304             |
| DHW max operating pressure       | bar               | 10              |                 |                 |                 |                 |                 |
| Exchanger max operating pressure | bar               | 10              |                 |                 |                 |                 |                 |
| Max coil temperature             | °C                | 110             |                 |                 |                 |                 |                 |
| Max boiler operating temperature | °C                | 95              |                 |                 |                 |                 |                 |
| <b>CODE</b>                      |                   | <b>OYH08AXA</b> | <b>OYH09AXA</b> | <b>OYH0BAXA</b> | <b>OYH0CAXA</b> | <b>OYH0EAXA</b> | <b>OYH0DAXA</b> |


# ECOUNTIT H-2

## DOUBLE COIL STORAGE TANKS



### > PRODUCT FEATURES

ECOUNTIT H-2 is a vertical double coil hot water storage tank. This unit is designed for heating domestic hot water with two energy sources and a DHW system, compatibly with the performance and power characteristics. Enamelled steel tanks (S235JR) with 750 to 3000-litre capacity which can be inspected through a flange installed at the bottom of the tank and featuring fixed double heat exchanger. These models are used for the production of domestic hot water with a source of solar energy or boiler. The tank is protected by a layer of porcelain glaze that guarantees a long service life. The glazing and magnesium anode sizing processes (provided as standard) observe DIN 4753 P.3. Hard PU jackets for the 750 and 1000 lt models and polyester fibre for the 1500 to 3000 lt models. The outer casing is coupled PVC.

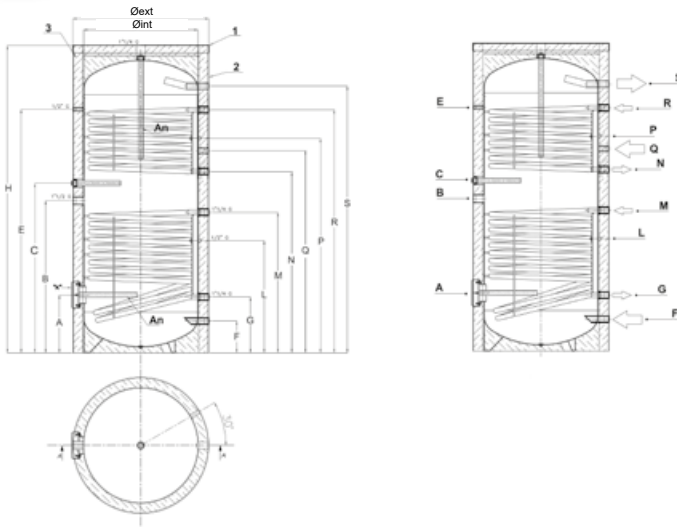

| TYPE OF FITTING |   | 750     | 1000 | 1500 | 2000 | 2500 | 3000 |
|-----------------|---|---------|------|------|------|------|------|
| <b>A</b>        | Flange                                    | mm 400  | 400  | 520  | 550  | 640  | 640  |
| <b>B</b>        | Connection for electrical heating element | mm 890  | 890  | 1255 | 1310 | 1400 | 1400 |
| <b>C</b>        | Connection for anode                      | mm \    | \    | \    | \    | \    | 1640 |
| <b>E</b>        | Pit for thermometer                       | mm 1460 | 1680 | 1825 | 2090 | 2130 | 2430 |
| <b>F</b>        | Cold water inlet                          | mm 220  | 220  | 315  | 340  | 430  | 430  |
| <b>G</b>        | Solar circuit return                      | mm 385  | 385  | 470  | 460  | 550  | 550  |
| <b>L</b>        | Solar probe pit                           | mm 685  | 685  | 945  | 985  | 1075 | 1075 |
| <b>M</b>        | Solar circuit delivery                    | mm 835  | 835  | 1180 | 1160 | 1250 | 1300 |
| <b>N</b>        | Heating return                            | mm 990  | 990  | 1330 | 1450 | 1540 | 1790 |
| <b>Q</b>        | Recirculation connection                  | mm 1235 | 1235 | 1460 | 1650 | 1740 | 2040 |
| <b>P</b>        | Heating probe pit                         | mm 1340 | 1340 | 1600 | 1825 | 1905 | 2205 |
| <b>R</b>        | Heating delivery                          | mm 1440 | 1440 | 1735 | 2000 | 2040 | 2340 |
| <b>S</b>        | Hot water output                          | mm 1590 | 1840 | 1935 | 2210 | 2250 | 2550 |

| MODEL                                  |                   | 750-2           | 1000-2          | 1500-2          | 2000-2          | 2500-2          | 3000-2          |
|--|-------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| ERP Class                              | (Class F - A*)    | N.A.            | N.A.            | N.A.            | N.A.            | N.A.            | N.A.            |
| Total volume                           | l                 | 734             | 853             | 1451            | 1959            | 2458            | 2786            |
| Thermal dispersion                     | W                 | 113             | 121             | 153             | 180             | 284             | 305             |
| External diameter                      | mm                | 950             | 950             | 1200            | 1300            | 1400            | 1400            |
| Total height                           | mm                | 1845            | 2095            | 2285            | 2550            | 2680            | 2980            |
| Lower coil surface                     | m <sup>2</sup>    | 2.4             | 2.5             | 4.2             | 4.5             | 4.8             | 5.2             |
| Lower coil water content               | l                 | 15.0            | 15.0            | 25.4            | 28.0            | 29.5            | 31.6            |
| Low coil exchangeable power            | kW                | 74.1            | 74.1            | 124.5           | 133.4           | 142.3           | 154.2           |
| Low. coil DHW production               | m <sup>3</sup> /h | 1.8             | 1.8             | 3.06            | 3.3             | 3.5             | 3.8             |
| Necessary flow rate to lower coil      | m <sup>3</sup> /h | 3.2             | 3.2             | 5.4             | 5.7             | 6.1             | 6.6             |
| Lower coil pressure drops              | kPa               | 1.90            | 1.90            | 1.94            | 2.37            | 2.68            | 2.95            |
| Upper coil surface                     | m <sup>2</sup>    | 2.4             | 2.5             | 2.5             | 3.0             | 3.5             | 3.8             |
| Upper coil water content               | l                 | 15.0            | 15.0            | 15.2            | 18.7            | 21.1            | 23.2            |
| Upper coil exchangeable power          | kW                | 71.2            | 71.2            | 71.2            | 89.0            | 103.8           | 112.7           |
| Upp. coil DHW production               | m <sup>3</sup> /h | 1.75            | 1.75            | 1.75            | 2.2             | 2.55            | 2.77            |
| Necessary flow rate to upper coil      | m <sup>3</sup> /h | 3.1             | 3.1             | 3.1             | 3.8             | 4.5             | 4.8             |
| Upper coil pressure drops              | kPa               | 1.90            | 1.90            | 3.23            | 3.56            | 3.76            | 40.3            |
| Maximum pressure in the tank / coil    | bar               | 10 / 10         |                 |                 |                 |                 |                 |
| Maximum temperature in the tank / coil | °C                | 95 / 110        |                 |                 |                 |                 |                 |
| Empty weight                           | Kg                | 206             | 227             | 380             | 458             | 593             | 653             |
| <b>CODE</b>                            |                   | <b>OYH58AXA</b> | <b>OYH59AXA</b> | <b>OYH5BAXA</b> | <b>OYH5CAXA</b> | <b>OYH5EAXA</b> | <b>OYH5DAXA</b> |

# ECOTANK H CARBON STEEL STORAGE TANKS TANK-IN-TANK

ERP




## > PRODUCT FEATURES

Tank-in-tank carbon steel tanks with 800/200, 1500/300 capacity equipped with a single fixed exchanger, with a second internal vitrified carbon steel tank, according to DIN 4753 P.3.

They are externally insulated by the application of an outer casing of soft polyurethane th. 100 mm.

**This type of storage tank is used for the production of domestic hot water and heating.**

| TYPE OF FITTING                      | 800/1500 |
|--------------------------------------|----------|
| A Heating return                     | 1" G     |
| B Free connection                    | 1" G     |
| C Free connection                    | 1" G     |
| E Electr.heat. element. fittings     | 1 1/2" G |
| F Free connection                    | 1" G     |
| G Heating delivery                   | 1" G     |
| L Discharge                          | 1" G     |
| M Solar circuit return               | 1" G     |
| N Solar probe fitting                | 1/2" G   |
| P Solar probe fitting                | 1/2" G   |
| Q Solar circuit delivery             | 1" G     |
| R Probe fitting                      | 1/2" G   |
| S Probe fitting                      | 1/2" G   |
| T Thermometer                        | 1/2" G   |
| V Electrical heating element fitting | 1 1/2" G |
| 1 Cold water (external thread)       | 1" G     |
| 2 Recirculation (external thread)    | 1" G     |
| 3 Hot water (external thread)        | 1" G     |
| 4 Vent (internal thread)             | 1/2" G   |

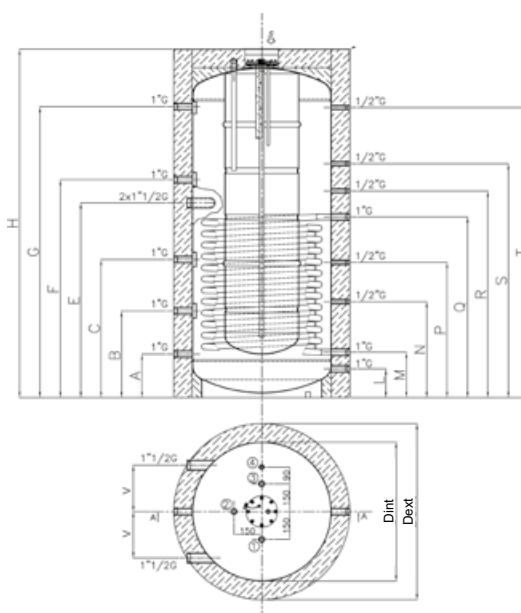

| DIMENSIONS (mm) | 800  | 1500 |
|-----------------|------|------|
| A               | 235  | 390  |
| B               | 468  | 665  |
| C               | 745  | 940  |
| D ext           | 950  | 1200 |
| D int           | 750  | 1000 |
| E               | 1050 | 1200 |
| F               | 1050 | 1500 |
| G               | 1570 | 1710 |
| Total H         | 1880 | 2100 |
| L               | 155  | 205  |
| M               | 245  | 380  |
| N               | --   | 630  |
| P               | 730  | 875  |
| Q               | 975  | 1125 |
| R               | 1115 | 1310 |
| S               | 1262 | 1500 |
| T               | 1565 | 1710 |
| V               | 250  | 300  |

| MODEL                                      |                   | 800             | 1500            |
|--|-------------------|-----------------|-----------------|
| Capacity                                   | l                 | 750             | 1500            |
| DHW capacity                               | l                 | 200             | 300             |
| Heating water capacity                     | l                 | 550             | 1200            |
| Solar coil exchanger                       | m <sup>2</sup>    | 2.5             | 3.9             |
| Solar coil water content                   | l                 | 15.9            | 24.7            |
| Solar coil absorbed power                  | KW                | 74              | 116             |
| Necessary flow rate to solar coil          | m <sup>3</sup> /h | 3.2             | 5               |
| Heating water production 80/60°C           | m <sup>3</sup> /h | 1.8             | 2.8             |
| Solar coil pressure drops                  | kPa               | 3.55            | 5.17            |
| Empty weight                               | kg                | 217             | 307             |
| Thermal dispersion                         | W                 | 116             | 149             |
| Maximum dhw operating pressure             | bar               | 10              | 10              |
| Maximum exchanger operating pressure       | bar               | 10              | 10              |
| Maximum heating operating pressure         | bar               | 3               | 3               |
| Maximum storage tank operating temperature | °C                | 95              | 95              |
| <b>CODE</b>                                |                   | <b>OYH28AXA</b> | <b>OYH2BAXA</b> |


# ECOMULTI H MULTI-ENERGY PUFFER WITH STAINLESS STEEL EXCHANGER ONLY

ERP



## > PRODUCT FEATURES

- Possibility of using the system as a multi-energy "puffer" with the parallel connection of several sources (ex. boiler + solar + heat pump or thermo-fireplace)
- Corrugated AISI 316L STAINLESS STEEL semi-rapid exchanger for the production of domestic hot water
- 6 probe pits + 1 for electrical heating element
- 100 mm soft PU insulation
- Double low speed controlled stratification system for the connection of the low and medium temperature system return
- No galvanic anode required (d.h.w. production is obtained with the AISI 316 stainless steel semi-rapid internal exchanger) and relative maintenance

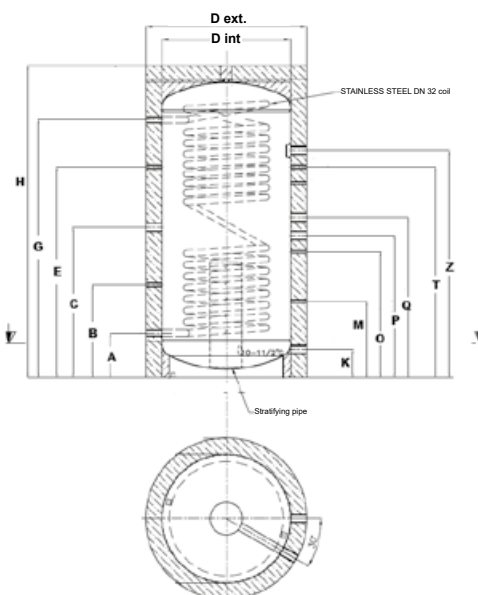

| TYPE OF FITTING |                             | 500-800  | 1000     |
|-----------------|-----------------------------|----------|----------|
| 1. (A)          | Domestic cold water inlet   | 1" G     | 1" G     |
| 2. (B)          | Probe                       | 1/2" G   | 1/2" G   |
| 3. (C)          | Electrical heating element  | 1" 1/2 G | 1" 1/2 G |
| 4. (E)          | Boiler probe                | 1/2" G   | 1/2" G   |
| 6. (G)          | Domestic hot water delivery | 1" G     | 1" G     |
| 7. (K)          | Boiler return               | 1" 1/4 G | 1" 1/2 G |
| 8. (K)          | Boiler delivery             | 1" 1/4 G | 1" 1/2 G |
| 11. (N)         | Solar energy delivery       | 1" G     | 1" G     |
| 12. (O)         | Thermal Probe               | 1/2" G   | 1/2" G   |
| 13. (P)         | Connections                 | 1" 1/2 G | 1" 1/2 G |
| 14. (Q)         | Connection                  | 1" 1/2 G | 1" 1/2 G |
| 17. (T)         | Thermometer                 | 1/2" G   | 1/2" G   |
| 20. (Z)         | Boiler delivery             | 1" 1/2 G | 1" 1/2 G |

| DIMENSIONS (mm) | 500  | 800  | 1000 |
|-----------------|------|------|------|
| A               | 240  | 270  | 270  |
| B               | 440  | 570  | 580  |
| C               | 820  | 920  | 1130 |
| D ext           | 850  | 990  | 990  |
| D int           | 650  | 790  | 790  |
| E               | 1150 | 1290 | 1500 |
| G               | 1420 | 1580 | 1760 |
| H tot           | 1720 | 1910 | 2090 |
| K               | 150  | 170  | 170  |
| N               | 640  | 670  | 730  |
| O               | --   | 770  | 840  |
| P               | 810  | 870  | 950  |
| Q               | --   | 870  | 950  |
| T               | 1170 | 1190 | 1330 |
| Z               | 1400 | 1390 | 1520 |

| MODEL                                      |                   | 500             | 800             | 1000            |
|--|-------------------|-----------------|-----------------|-----------------|
| ERP Class                                  | (Class F - A)     | <b>C</b>        | N.A.            | N.A.            |
| Capacity                                   | l                 | 500             | 800             | 1000            |
| DHW pipe surface                           | m <sup>2</sup>    | 5.64            | 5.64            | 5.64            |
| DHW volume                                 | l                 | 35              | 35              | 35              |
| DHW production                             | m <sup>3</sup> /h | 0.417           | 0.660           | 1.230           |
| 80/60°C - 10/45°C                          | KW                | 17              | 27              | 50              |
| Empty weight                               | kg                | 113             | 159             | 171             |
| Thermal dispersion                         | W                 | 88              | 115             | 122             |
| Maximum dhw operating pressure             | bar               | 6               | 6               | 6               |
| Maximum exchanger operating pressure       | bar               | 10              | 10              | 10              |
| Maximum heating operating pressure         | bar               | 3               | 3               | 3               |
| Maximum storage tank operating temperature | °C                | 95              | 95              | 95              |
| CODE                                       |                   | <b>OYH76AXA</b> | <b>OYH78AXA</b> | <b>OYH79AXA</b> |

# ECOMULTI H-1 MULTI-ENERGY PUFFER WITH STAINLESS STEEL EXCHANGER AND ONE FIXED EXCHANGER


ERP



## > PRODUCT FEATURES

- Possibility of stratified loading from the solar circuit to optimise seasonal efficiency through a coil, or alternatively to use the system as a multi-energy "puffer" with the parallel connection of several sources (ex. boiler + solar + heat pump or thermo-fireplace)
- Corrugated AISI 316L STAINLESS STEEL semi-rapid exchanger for the production of domestic hot water
- 6 probe pits + 1 for electrical heating element
- 100 mm soft PU insulation
- Double low speed controlled stratification system for the connection of the low and medium temperature system return
- No galvanic anode required (d.h.w. production is obtained with the AISI 316 stainless steel semi-rapid internal exchanger) and relative maintenance

| TYPE OF FITTING                    | 500-1 / 800-1 | 1000-1   |
|------------------------------------|---------------|----------|
| 1. (A) Domestic cold water inlet   | 1" G          | 1" G     |
| 2. (B) Probe                       | 1/2" G        | 1/2" G   |
| 3. (C) Electrical heating element  | 1" 1/2 G      | 1" 1/2 G |
| 4. (E) Boiler probe                | 1/2" G        | 1/2" G   |
| 6. (G) Domestic hot water delivery | 1" G          | 1" G     |
| 7. (K) Boiler return               | 1" 1/4 G      | 1" 1/2 G |
| 8. (K) Boiler delivery             | 1" 1/4 G      | 1" 1/2 G |
| 9. (L) Solar energy return         | 1" G          | 1" G     |
| 10. (M) Solar probe                | 1/2" G        | 1/2" G   |
| 11. (N) Solar energy delivery      | 1" G          | 1" G     |
| 12. (O) Thermal Probe              | 1/2" G        | 1/2" G   |
| 13. (P) Connections                | 1" 1/2 G      | 1" 1/2 G |
| 14. (Q) Connection                 | 1" 1/2 G      | 1" 1/2 G |
| 17. (T) Thermometer                | 1/2" G        | 1/2" G   |
| 18. (Z) Connection                 | 1" 1/2 G      | 1" 1/2 G |

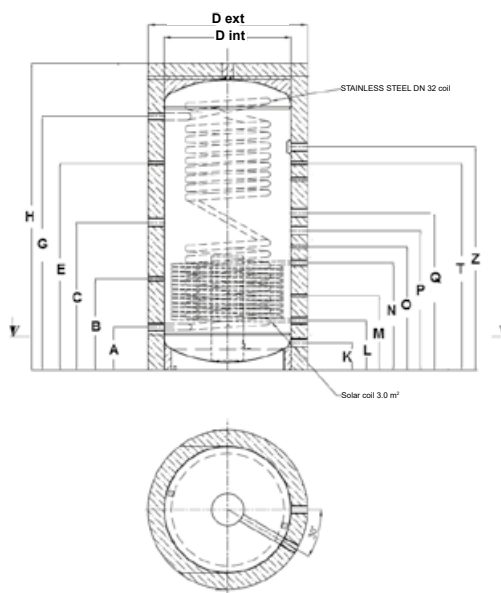

| DIMENSIONS (mm) | 500-1 | 800-1 | 1000-1 |
|-----------------|-------|-------|--------|
| A               | 240   | 270   | 270    |
| B               | 440   | 570   | 580    |
| C               | 820   | 920   | 1130   |
| D ext           | 850   | 990   | 990    |
| D int           | 650   | 790   | 790    |
| E               | 1150  | 1290  | 1500   |
| G               | 1420  | 1580  | 1760   |
| H tot           | 1720  | 1910  | 2090   |
| K               | 150   | 170   | 170    |
| L               | 280   | 310   | 310    |
| M               | 490   | 465   | 495    |
| N               | 640   | 670   | 730    |
| O               | --    | 770   | 840    |
| P               | 810   | 870   | 950    |
| Q               | --    | 870   | 950    |
| T               | 1170  | 1190  | 1330   |
| Z               | 1400  | 1390  | 1520   |

| MODEL                                       |                | 500-1           | 800-1           | 1000-1          |
|---|----------------|-----------------|-----------------|-----------------|
| ERP Class                                   | (Class F - A*) | <b>C</b>        | N.A.            | N.A.            |
| Capacity                                    | l              | 500             | 800             | 1000            |
| DHW pipe surface                            | m²             | 5.64            | 5.64            | 5.64            |
| DHW volume                                  | l              | 35              | 35              | 35              |
| Exchanger (low)                             | m²             | 2.3             | 3.0             | 3.0             |
| Coil water content (low)                    | l              | 12.4            | 14.9            | 14.9            |
| Absorbed power (low)                        | KW             | 68              | 89              | 89              |
| Necessary flow rate to the coil (low)       | m³/h           | 2.9             | 3.8             | 3.8             |
| Heating water production 80/60°C (low)      | m³/h           | 1.7             | 2.2             | 2.2             |
| Low. pressure drops with flow rate of 1m³/h | kPa            | 1.71            | 2.14            | 2.14            |
| DHW production 80/60°C - 10/45°C            | m³/h           | 0.417           | 0.660           | 1.230           |
|   | KW             | 17              | 27              | 50              |
| Empty weight                                | kg             | 141             | 194             | 206             |
| Thermal dispersion                          | W              | 90              | 116             | 122             |
| Maximum dhw operating pressure              | bar            | 6               | 6               | 6               |
| Maximum exchanger operating pressure        | bar            | 10              | 10              | 10              |
| Maximum heating operating pressure          | bar            | 3               | 3               | 3               |
| Maximum storage tank operating temperature  | °C             | 95              | 95              | 95              |
| <b>CODE</b>                                 |                | <b>OYH86AXA</b> | <b>OYH88AXA</b> | <b>OYH89AXA</b> |

# ECOMULTI H-2




## MULTI-ENERGY PUFFER WITH STAINLESS STEEL EXCHANGER AND 2 FIXED EXCHANGERS

### > PRODUCT FEATURES

- Possibility of stratified loading from the solar circuit to optimise seasonal efficiency through a coil, or alternatively to use the system as a multi-energy "puffer" with the parallel connection of several sources (ex. boiler + solar + heat pump or thermo-fireplace)
- Corrugated AISI 316L STAINLESS STEEL semi-rapid exchanger for the production of domestic hot water
- 6 probe pits + 1 for electrical heating element
- 100 mm soft PU insulation
- Double low speed controlled stratification system for the connection of the low and medium temperature system return
- No galvanic anode required (DHW production is obtained with the AISI 316 stainless steel semi-rapid internal exchanger) and relative maintenance

| TYPE OF FITTING |                             | 500-2/800-2 | 1000-2   |
|-----------------|-----------------------------|-------------|----------|
| 1. (A)          | Domestic cold water inlet   | 1" G        | 1" G     |
| 2. (B)          | Probe                       | 1/2" G      | 1/2" G   |
| 3 (C)           | Electrical heating element  | 1" 1/2 G    | 1" 1/2 G |
| 4. (E)          | Boiler probe                | 1/2" G      | 1/2" G   |
| 6. (G)          | Domestic hot water delivery | 1" G        | 1" G     |
| 7. (K)          | Boiler return               | 1" 1/4 G    | 1" 1/2 G |
| 8. (K)          | Boiler delivery             | 1" 1/4 G    | 1" 1/2 G |
| 9. (L)          | Solar energy return         | 1" G        | 1" G     |
| 10. (M)         | Solar probe                 | 1/2" G      | 1/2" G   |
| 11. (N)         | Solar energy delivery       | 1" G        | 1" G     |
| 12. (O)         | Thermal Probe               | 1/2" G      | 1/2" G   |
| 13. (P)         | Connections                 | 1" 1/2 G    | 1" 1/2 G |
| 14. (Q)         | Connection                  | 1" 1/2 G    | 1" 1/2 G |
| 15. (R)         | Alternative energy return   | 1" G        | 1" G     |
| 17. (T)         | Thermometer                 | 1/2" G      | 1/2" G   |
| 19. (V)         | Alternative energy delivery | 1" G        | 1" G     |
| 20. (Z)         | Boiler delivery             | 1" 1/2 G    | 1" 1/2 G |

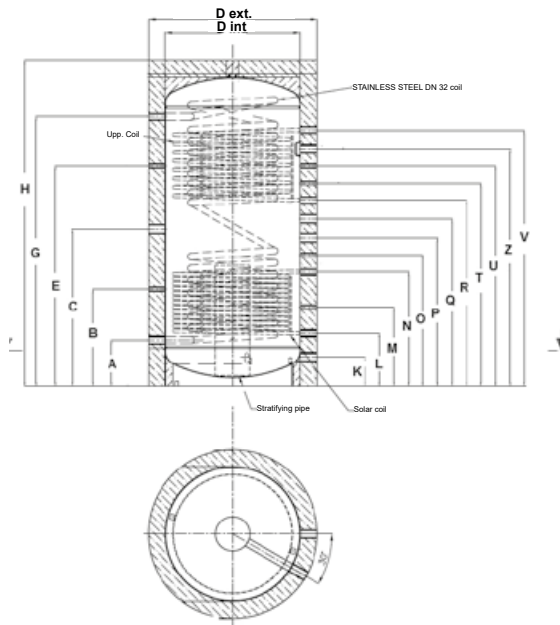


| DIMENSIONS (mm) | 500-2 | 800-2 | 1000-2 |
|-----------------|-------|-------|--------|
| A               | 240   | 270   | 270    |
| B               | 440   | 570   | 580    |
| C               | 820   | 920   | 1130   |
| D ext           | 850   | 990   | 990    |
| D int           | 650   | 790   | 790    |
| E               | 1150  | 1290  | 1500   |
| G               | 1420  | 1580  | 1760   |
| H tot           | 1720  | 1910  | 2090   |
| K               | 150   | 170   | 170    |
| L               | 280   | 310   | 310    |
| M               | 490   | 465   | 495    |
| N               | 640   | 670   | 730    |
| O               | --    | 770   | 840    |
| P               | 810   | 870   | 950    |
| Q               | --    | 980   | 1060   |
| R               | 930   | 1090  | 1210   |
| S               | 1050  | --    | --     |
| T               | 1170  | 1190  | 1330   |
| U               | --    | 1290  | 1450   |
| V               | 1290  | 1500  | 1680   |
| Z               | 1400  | 1390  | 1520   |

| MODEL  |                   | 500-2           | 800-2           | 1000-2          |
|--|-------------------|-----------------|-----------------|-----------------|
| ERP Class  | (Class F - A')    | <b>C</b>        | NA.             | NA.             |
| Capacity   | l                 | 500             | 800             | 1000            |
| DHW pipe surface   | m <sup>2</sup>    | 5.64            | 5.64            | 5.64            |
| DHW volume   | l                 | 35              | 35              | 35              |
| Exchanger (upp/low)  | m <sup>2</sup>    | 2.3 / 2.3       | 2.0 / 3         | 3.0 / 3.0       |
| Coil water content (upp/low)                                 | l                 | 12.4 / 12.4     | 14.9 / 14.9     | 14.9 / 14.9     |
| Absorbed power (upp/low)                                     | kW                | 68 / 68         | 60 / 89         | 89 / 89         |
| Necessary flow rate to coil (upp/low)                        | m <sup>3</sup> /h | 2.9 / 2.9       | 2.6 / 3.8       | 3.8 / 3.8       |
| Heating water production 80/60°C (upp/low)                   | m <sup>3</sup> /h | 1.7 / 1.7       | 1.5 / 2.2       | 2.2 / 2.2       |
| Upp/Low. pressure drops with flow rate of 1m <sup>3</sup> /h | kPa               | 1.71 / 1.71     | 1.34 / 2.14     | 2.14 / 2.14     |
| DHW production 80/60°C - 10/45°C                             | m <sup>3</sup> /h | 0.417           | 0.660           | 1.230           |
|  | kW                | 17              | 27              | 50              |
| Empty weight   | kg                | 169             | 217             | 250             |
| Thermal dispersion   | W                 | 90              | 117             | 123             |
| Maximum dhw operating pressure                               | bar               | 6               | 6               | 6               |
| Maximum exchanger operating pressure                         | bar               | 10              | 10              | 10              |
| Maximum heating operating pressure                           | bar               | 3               | 3               | 3               |
| Maximum storage tank operating temperature                   | °C                | 95              | 95              | 95              |
| <b>CODE</b>  |                   | <b>OYH96AXA</b> | <b>OYH98AXA</b> | <b>OYH99AXA</b> |

# ECOPUFFER H

ERP

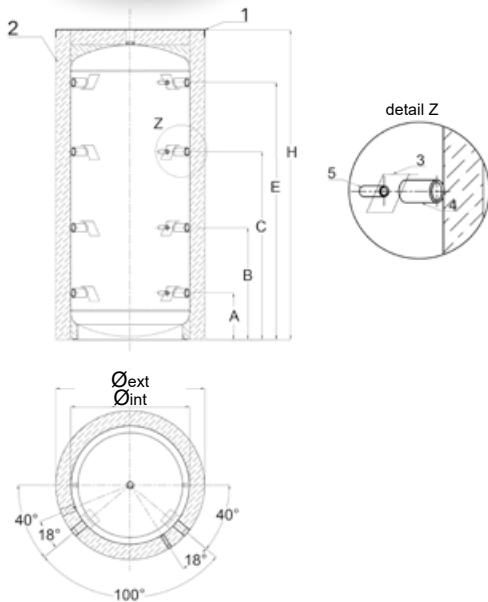

## TANK FOR THE STORAGE OF TECHNICAL WATER

### > PRODUCT FEATURES

- Raw carbon steel tanks S235JR without exchanger with capacity from 500 lt up to 5000 lt, for the storage of technical water
- Insulated externally with a 100 mm-thick polyester spunbond non-woven fabric (VLIES) outer casing
- Energy class C up to and including 500-litre capacity
- External anti-corrosion coating
- 3 probe pits

| TYPE OF FITTING |              | 500 / 2000 | 3000 - 5000 |
|-----------------|--------------|------------|-------------|
| <b>A</b>        | Connection 1 | 1" ½ G     | 2" G        |
| <b>B</b>        | Connection 2 | 1" ½ G     | 2" G        |
| <b>C</b>        | Connection 3 | 1" ½ G     | 2" G        |
| <b>E</b>        | Connection 4 | 1" ½ G     | 2" G        |
|                 | Sensors      | ½" G       | ½" G        |

| DIMENSIONS (mm)           | 500  | 800  | 1000 | 1500 | 2000 | 3000 | 5000 |
|---------------------------|------|------|------|------|------|------|------|
| <b>A (Soft insulat.)</b>  | 210  | 260  | 310  | 372  | 328  | 390  | 495  |
| <b>B (Soft insulat.)</b>  | 605  | 630  | 745  | 817  | 885  | 1950 | 1120 |
| <b>C (Soft insulat.)</b>  | 995  | 1030 | 1250 | 1342 | 1441 | 1510 | 1745 |
| <b>E (Soft insulat.)</b>  | 1345 | 1430 | 1710 | 1752 | 1998 | 1070 | 2375 |
| <b>A (Stiff insulat.)</b> | 235  | -    | -    | -    | -    | -    | -    |
| <b>B (Stiff insulat.)</b> | 630  | -    | -    | -    | -    | -    | -    |
| <b>C (Stiff insulat.)</b> | 1020 | -    | -    | -    | -    | -    | -    |
| <b>E (Stiff insulat.)</b> | 1370 | -    | -    | -    | -    | -    | -    |

| MODEL                               |                | 500             | 800             | 1000            | 1500            | 2000            | 3000            | 5000            |
|-------------------------------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| ERP Class                           | (Class F - A*) | <b>C</b>        | N.A.            | N.A.            | N.A.            | N.A.            | N.A.            | N.A.            |
| Total volume                        | l              | 471             | 736             | 888             | 1474            | 2012            | 2673            | 4978            |
| Thermal dispersion                  | W              | 88              | 111             | 123             | 163             | 173             | 284             | 418             |
| External diameter (soft insulation) | mm             | 850             | 990             | 990             | 1200            | 1300            | 1450            | 1800            |
| Total height (soft insulation)      | mm             | 1640            | 1750            | 2050            | 2150            | 2480            | 2515            | 2895            |
| Maximum pressure in the tank        | bar            | 3               |                 |                 |                 |                 |                 |                 |
| Maximum temperature in the tank     | °C             | 95              |                 |                 |                 |                 |                 |                 |
| Empty weight                        | Kg             | 88              | 106             | 133             | 180             | 250             | 320             | 630             |
| <b>CODE</b>                         |                | <b>0YH16AXA</b> | <b>0YH18AXA</b> | <b>0YH19AXA</b> | <b>0YH1BAXA</b> | <b>0YH1CAXA</b> | <b>0YH1DAXA</b> | <b>0YH1GAXA</b> |


# ECOPUFFER H-1



## TANK FOR THE STORAGE OF TECHNICAL WATER WITH FIXED EXCHANGER

### > PRODUCT FEATURES

- Raw carbon steel tanks S235JR with exchanger with capacity from 500 lt up to 5000 lt, for the storage of technical water
- Insulated externally with a 100 mm-thick polyester spunbond non-woven fabric (VLIES) outer casing
- Energy class C up to and including 500-litre capacity
- External anti-corrosion coating

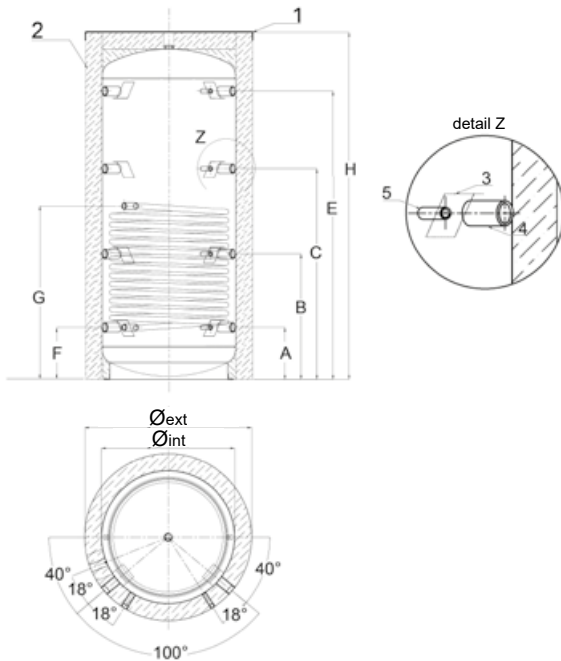

| TYPE OF FITTING           | 500 / 2000 | 3000 - 5000 |
|---------------------------|------------|-------------|
| <b>A</b> Connection       | 1" ½ G     | 2" G        |
| <b>B</b> Connection       | 1" ½ G     | 2" G        |
| <b>C</b> Connection       | 1" ½ G     | 2" G        |
| <b>E</b> Connection       | 1" ½ G     | 2" G        |
| <b>F</b> Exchanger inlet  | 1" G       | 1" G        |
| <b>G</b> Exchanger outlet | 1" G       | 1" G        |
| Sensors                   | ½" G       | ½" G        |

| DIMENSIONS (mm)           | 500  | 800  | 1000 | 1500 | 2000 | 3000 | 5000 |
|---------------------------|------|------|------|------|------|------|------|
| <b>A (Soft insulat.)</b>  | 210  | 260  | 310  | 372  | 328  | 390  | 495  |
| <b>B (Soft insulat.)</b>  | 605  | 630  | 745  | 817  | 885  | 1950 | 1120 |
| <b>C (Soft insulat.)</b>  | 995  | 1030 | 1250 | 1342 | 1441 | 1510 | 1745 |
| <b>F (Soft insulat.)</b>  | 1345 | 1430 | 1710 | 1752 | 1998 | 1070 | 2375 |
| <b>F Exchanger inlet</b>  | 210  | 260  | 310  | 372  | 328  | 390  | 495  |
| <b>G Exchanger outlet</b> | 1105 | 930  | 1030 | 1172 | 1131 | 1140 | 1265 |
| <b>A (Stiff insulat.)</b> | 235  | -    | -    | -    | -    | -    | -    |
| <b>B (Stiff insulat.)</b> | 630  | -    | -    | -    | -    | -    | -    |
| <b>C (Stiff insulat.)</b> | 1020 | -    | -    | -    | -    | -    | -    |
| <b>E (Stiff insulat.)</b> | 1370 | -    | -    | -    | -    | -    | -    |

| MODEL                              |                   | 500-1           | 800-1           | 1000-1          | 1500-1          | 2000-1          | 3000-1          | 5000-1          |
|------------------------------------|-------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| ERP Class                          | (Class F - A)     | <b>C</b>        | N.A.            | N.A.            | N.A.            | N.A.            | N.A.            | N.A.            |
| Total volume                       | l                 | 471             | 736             | 888             | 1474            | 2012            | 2673            | 4978            |
| Thermal dispersion                 | W                 | 88              | 111             | 123             | 163             | 173             | 284             | 418             |
| External diameter                  | mm                | 850             | 990             | 990             | 1200            | 1300            | 1450            | 1800            |
| Total height                       | mm                | 650             | 790             | 790             | 1000            | 1100            | 1250            | 1600            |
| Coil surface                       | m <sup>2</sup>    | 1.8             | 2.4             | 3.0             | 3.6             | 4.2             | 5.0             | 5.0             |
| Coil water content                 | l                 | 11.4            | 15.2            | 19.0            | 22.8            | 26.6            | 31.1            | 31.1            |
| Exchangeable coil power            | kW                | 53              | 72              | 89              | 107             | 125             | 148             | 148             |
| Coil domestic hot water production | m <sup>3</sup> /h | 1.3             | 1.8             | 2.2             | 2.6             | 3.1             | 3.6             | 3.6             |
| Necessary flow rate to the coil    | m <sup>3</sup> /h | 2.3             | 3.1             | 3.8             | 4.6             | 5.4             | 6.4             | 6.4             |
| Coil pressure drops                | kPa               | 1.48            | 1.88            | 2.38            | 2.88            | 3.37            | 3.99            | 3.85            |
| Maximum pressure in the tank       | bar               | 3               |                 |                 |                 |                 |                 |                 |
| Maximum pressure in the coil       | bar               | 3               |                 |                 |                 |                 |                 |                 |
| Maximum temperature in the tank    | °C                | 95              |                 |                 |                 |                 |                 |                 |
| Maximum temperature in the coil    | °C                | 110             |                 |                 |                 |                 |                 |                 |
| Empty weight                       | Kg                | 88              | 106             | 133             | 180             | 250             | 320             | 630             |
| <b>CODE</b>                        |                   | <b>OYH66AXA</b> | <b>OYH68AXA</b> | <b>OYH69AXA</b> | <b>OYH6BAXA</b> | <b>OYH6CAXA</b> | <b>OYH6DAXA</b> | <b>OYH6GAXA</b> |



# HEAT PUMPS



## PRODUCT COMPLIANT WITH ERP (ECODESIGN - LABELLING) REGULATIONS

- Minimum efficiency for DHW/heating (of 26/09/2015)
- Minimum efficiency for pump (of 01/08/2015)

|                           |     |
|---------------------------|-----|
| EGEA LT / HT              | 162 |
| AQUA <sup>1</sup> PLUS HT | 164 |
| AQUA <sup>1</sup> PLUS LT | 166 |
| OMNIA HYBRID C            | 168 |
| OMNIA HYBRID H            | 172 |
| OMNIA H                   | 176 |
| RVL-I PLUS                | 180 |

# EGEA LT / HT



## WATER HEATER WITH HEAT PUMP FOR FLOOR STANDING INSTALLATION WITH POSITIVE (MOD. HT) AND NEGATIVE (MOD. LT) AIR TEMPERATURES (LT)



### > GENERAL CHARACTERISTICS MOD HT:

- Air heat pump and integrated storage tank for the production of domestic hot water
- Passive air defrosting system that prevents the range of the inlet air temperatures from dropping below 4 °C
- Possibility of channelling ejection air
- Hung (mod. 90) and floor-standing installation (mod. 160, 200 and 260)
- Possibility of vertical or horizontal air ejection for floor-standing models
- Electrical heating element fitted in
- Simple and intuitive control panel on board the machine
- Enamelled steel water storage tank with 50 mm polyurethane insulation
- Main aluminium heat exchanger outside of the tank
- Anti-corrosion protection with magnesium anode
- With antilegionella cycle
- Set-up (2 digital inputs) for activation with availability of photovoltaic energy.

### > GENERAL CHARACTERISTICS MOD. LT:

- Air heat pump and integrated storage tank for the production of domestic hot water
- Active defrosting system to function correctly down to an air temperature of -7°C
- Possibility of ducting intake and ejection air
- Vertical column installation
- Possibility of air return or ejection in vertical or horizontal configuration
- Electrical heating element fitted in
- Simple and intuitive control panel on board the machine
- Enamelled steel water storage tanks with 50 mm polyurethane insulation
- Main aluminium heat exchanger outside of the tank
- Set-up with solar coil
- Double anti-corrosion magnesium anode
- With antilegionella cycle
- Set-up (2 digital inputs) for activation with availability of photovoltaic energy.
- Set-up (1 digital input) for deactivation with availability of solar energy.

### > CONTROL SYSTEM:


The control system, controlled by an easy to use and intuitive panel on-board the machine, uses programmable adjustments. This makes it possible to select the various operating modes (Automatic, Economy and Overboost).

The adjustment features a series of daily and weekly timed controls so as to combine operation with the various tariff time slots.

The internal adjustment system manages and optimises the integration of energy coming from other sources: it manages the supplied electrical heating element, it starts and exploits any over-production of photovoltaic electrical energy and raises the temperature of the water in the storage tank to the value set by the user (factory setting of 70°C).

## OVERALL DIMENSIONS

### MOD. 90 / 120

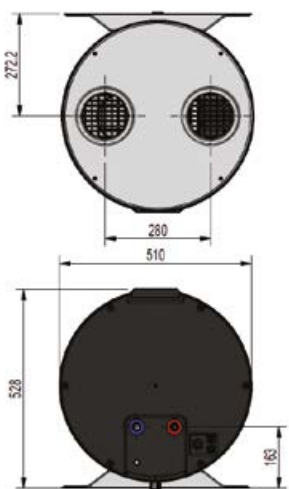

### MOD. 200 / 260



|      | 90   | 120  | 200  | 260  |
|------|------|------|------|------|
| A mm | 710  | 960  | 1607 | 1892 |
| B mm | 1380 | 1530 | -    | -    |

## GENERAL TECHNICAL DATA

| EGEA   |        | 90 LT                               | 120 LT           | 200 LT     | 260 LT     | 200 HT     | 260 HT     |
|--|--------|-------------------------------------|------------------|------------|------------|------------|------------|
| Nominal storage capacity                                       | l      | 89                                  | 118              | 187        | 247        | 192        | 250        |
| Max water flow 40°C  | l      | 94                                  | 143              | 270        | 333        | 260        | 358        |
| Storage energy losses  | W      | 40                                  | 46               | 63         | 71         | 60         | 70         |
| Electrical resistor output power                               | Wel    | 1200                                | 1200             | 1500       | 1500       | 1500       | 1500       |
| Average electrical power input                                 | Wel    | 240                                 | 245              | 430        | 430        | 370        | 370        |
| Useful output power  | Wth    | 833                                 |                  | 1820       | 1820       | 1600       | 1600       |
| Dimensions (Ø x W x H)   | mm     | 510 x 527 x 1380                    | 510 x 527 x 1530 | 621 x 1607 | 621 x 1892 | 621 x 1607 | 621 x 1892 |
| Net weight   | kg     | 60 - 150                            | 70 - 190         | 80 - 267   | 100 - 347  | 80 - 272   | 95 - 345   |
| Max water pressure   | bar    | 7                                   |                  | 7          |            | 7          |            |
| Max inlet air temperature                                      | °C     | 43                                  |                  | 38         |            | 43         |            |
| Min inlet air temperature                                      | °C     | -5                                  |                  | -7         |            | 4          |            |
| Nominal air flow   | m³/h   | 190                                 |                  | 350 / 500  |            | 350        |            |
| Min installation room volume                                   | m³     | 15                                  |                  | >20        |            | >20        |            |
| Parameters of the electrical connections                       | V - Hz | 230V - 50Hz                         |                  |            |            |            |            |
| Protection class   |        | IP - 24                             |                  |            |            |            |            |
| Sound power indoor Lw(A)                                       | dB(A)  | 54                                  | 54               | 56         | 56         | 54         | 54         |
| Anti-legio protection system                                   |        | Automatico                          |                  |            |            |            |            |
| Operating modes  |        | Auto, Eco, Boost, Elec. Heater, Fan |                  |            |            |            |            |
| Type of refrigerant  |        | R290                                |                  | R134a      |            | R134a      |            |
| Charge of refrigerant  | g      | 150                                 |                  | 900        |            | 900        |            |
| Heat-up time (EN 16147-2011) (*)                               | hh:mm  | 05:52                               | 08:15            | 08:17      | 10:14      | 07:16      | 09:44      |
| Heat-up time with BOOST mode (*)                               | hh:mm  | 02:30                               | 04:30            | 03:58      | 05:06      | 03:48      | 04:57      |
| COP - DHW (rif. EN 16147-2011) (*) (**)                        |        | 2,6(*)                              | 2,7(**)          | 3,0        | 3,1        | 2,8        | 3,1        |
| Internal solar coil heat exchanger                             |        | -                                   | -                | 0,6        | 0,6        | -          | -          |
| DHW energy efficiency class at average climate conditions      | -      | A+                                  | A+               | A+         | A+         | A+         | A+         |
| DHW energy efficiency class in % at average climate conditions | %      | 107                                 | 112              | 123        | 127        | 116        | 127        |
| Annual energy consumption kWh                                  | kWh    | 478                                 | 458              | 835        | 1323       | 883        | 1315       |
| Load profile declared  | -      | M                                   | M                | L          | XL         | L          | XL         |

### NOTES

(\*) Test referring to European standard EN16147-2011 with air inlet temperature 7°C (6°C), storage ambient room temperature 20°C, water heating from 10°C to 53°C

(\*\*) Test referring to European standard EN16147-2011 with air inlet temperature 7°C (6°C), storage ambient room temperature 20°C, water heating from 10°C to 55°C.

# AQUA<sup>1</sup> PLUS HT WATER HEATER WITH HEAT PUMP FOR HUNG AND FLOOR STANDING INSTALLATION WITH POSITIVE AIR TEMPERATURES

ERP



## > GENERAL CHARACTERISTICS:

- Air heat pump and integrated storage tank for the production of domestic hot water
- Passive air defrosting system that prevents the range of the inlet air temperatures from dropping below 4°C
- Possibility of channelling ejection air
- Hung (mod. 90) and floor-standing installation (mod. 160, 200 and 260)
- Possibility of vertical or horizontal air ejection for floor-standing models
- Electrical heating element fitted in
- Simple and intuitive control panel on board the machine
- Enamelled steel water storage tank with 50 mm polyurethane insulation
- Main aluminium heat exchanger outside of the tank
- Anti-corrosion protection with magnesium anode
- With antilegionella cycle
- Set-up (2 digital inputs) for activation with availability of photovoltaic energy.

The control system, controlled by an easy to use and intuitive panel on-board the machine, uses programmable adjustments. This makes it possible to select the various operating modes (Automatic, Economy and Overboost).


The adjustment features a series of daily and weekly timed controls so as to combine operation with the various tariff time slots.

The internal adjustment system manages and optimises the integration of energy coming from other sources: it manages the supplied electrical heating element, it starts and exploits any over-production of photovoltaic electrical energy and raises the temperature of the water in the storage tank to the value set by the user (factory setting of 70°C).

## APPLICATIONS


The air can be channelled to direct the flow appropriately for the various situations.

### Use of energy that already exists in the environment (POWER PLANT OR LAUNDRY ROOM)

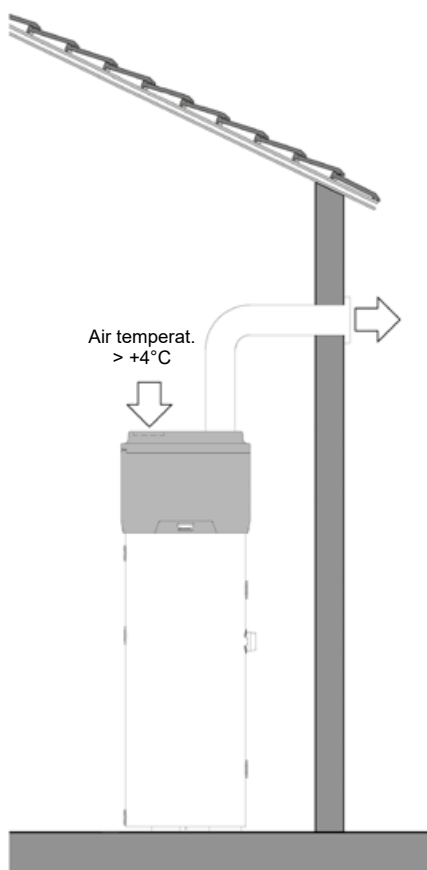

## LIMITS OF USE

**Temperature range.** The graph below indicates the temperature range of the produced air and water, which guarantees correct operation.

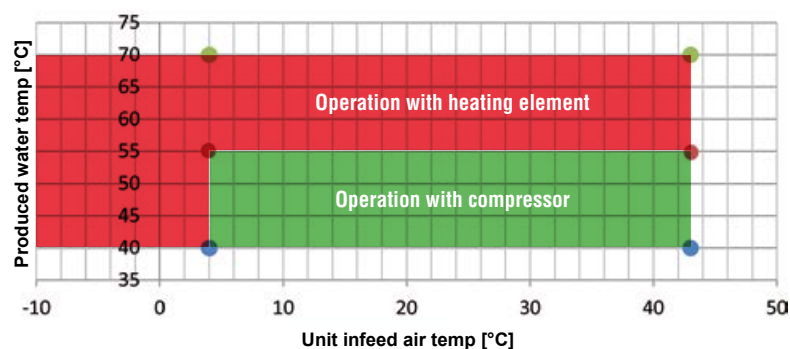

## POWER SUPPLY VOLTAGE RANGE

The table below provides the admissible variation conditions for the electrical power supply


|                          |           |         |
|--------------------------|-----------|---------|
| Standard power supply    | 230-1-50  | V-ph-Hz |
| Admissible voltage range | 207 - 254 | V       |

## GENERAL TECHNICAL DATA


| AQUA <sup>+</sup> PLUS                 |  |                             | 90 HT                                  | 160 HT          | 200 HT               | 260 HT               |      |
|--|--|-----------------------------|--|-----------------|----------------------|----------------------|------|
| Heat Pump                              | ERP Class  | (Class F - A <sup>+</sup> ) | <b>A<sup>+</sup></b>                   | <b>A</b>        | <b>A<sup>+</sup></b> | <b>A<sup>+</sup></b> |      |
|  | Power supply   | V-f-Hz                      | 230-1-50                               |                 |                      |                      |      |
|  | Heat output <sup>(ISO)</sup>   | W                           | 1005                                   | 1600            | 1600                 | 1600                 |      |
|  | Total absorbed power in heating <sup>(ISO)</sup>                             | W                           | 210                                    | 370             | 370                  | 370                  |      |
|  | COP <sup>(ISO)</sup>   | W/W                         | 4.79                                   | 4.32            | 4.32                 | 4.32                 |      |
|  | Rated current in heating <sup>(ISO)</sup>                                    | A                           | 0.95                                   | 1.70            | 1.70                 | 1.70                 |      |
|  | Total maximum absorbed power in heating                                      | W                           | 270                                    | 500             | 500                  | 500                  |      |
|  | Maximum current in heating   | A                           | 1.20                                   | 2.30            | 2.30                 | 2.30                 |      |
|  | Heating time <sup>(EN) (1)</sup>   | h:min                       | 5:30                                   | 6:41            | 7:16                 | 9:44                 |      |
|  | Heating energy <sup>(EN) (1)</sup>   | kWh                         | 1.20                                   | 2.68            | 2.83                 | 3.74                 |      |
|  | Consumption in stand-by <sup>(EN) (1)</sup>                                  | W                           | 14                                     | 29              | 27.3                 | 31                   |      |
|  | Class of use <sup>(EN) (1)</sup>   | Type                        | M                                      | L               | L                    | XL                   |      |
|  | Electrical consumption during the operating cycle WEL-TC <sup>(EN) (2)</sup> | kWh                         | 2.20                                   | 4.43            | 4.18                 | 6.17                 |      |
|  | COPDHW <sup>(EN) (1)</sup>   | W/W                         | 2.70                                   | 2.63            | 2.80                 | 3.10                 |      |
|  | Water reference temperature <sup>(EN) (1)</sup>                              | °C                          | 50.8                                   | 55.9            | 51.4                 | 53.7                 |      |
|  | Maximum quantity of usable water <sup>(EN) (2)</sup>                         | m <sup>3</sup>              | 0.094                                  | 0.233           | 0.260                | 0.358                |      |
|  | Heating efficiency ref standard <sup>(EU)</sup>                              | %                           | 104                                    | 104             | 110                  | 121                  |      |
|  | Annual consumption of electrical energy <sup>(EU)</sup>                      | kWh/year                    | 489                                    | 986             | 929                  | 1384                 |      |
|  | Electrical heating element   | Power                       | W                                      | 1200            | 1500                 | 1500                 | 1500 |
|  |  | Current                     | A                                      | 5.2             | 6.5                  | 6.5                  | 6.5  |
| Heat Pump + electrical heating element | Total absorbed power   | W                           | 1410                                   | 1870            | 1870                 | 1870                 |      |
|  | Rated current  | A                           | 6.15                                   | 8.20            | 8.20                 | 8.20                 |      |
|  | Maximum total absorbed power   | W                           | 1470                                   | 2000            | 2000                 | 2000                 |      |
|  | Maximum current  | A                           | 6.40                                   | 8.80            | 8.80                 | 8.80                 |      |
| Storage                                | Storage capacity   | l                           | 87                                     | 158             | 199                  | 255                  |      |
|  | Maximum pressure   | MPa                         | 0.7                                    | 0.7             | 0.7                  | 0.7                  |      |
|  | Material   | type                        | Enamelled steel                        |                 |                      |                      |      |
|  | Cathodic protection  | type                        | Mg anode                               |                 |                      |                      |      |
|  | Type/thickness insulation  | type/mm                     | polyurethane / 50                      |                 |                      |                      |      |
| Air circuit                            | Fan type   | type                        | Centrifugal                            |                 |                      |                      |      |
|  | Air flow rate  | m <sup>3</sup> /h           | 130                                    | 350 - 500       | 350 - 500            | 350 - 500            |      |
|  | Duct diameter  | mm                          | 125                                    | 160             | 160                  | 160                  |      |
|  | Maximum available head   | Pa                          | 120                                    | 200             | 200                  | 200                  |      |
| Cooling circuit                        | Compressor   | type                        | Rotary                                 |                 |                      |                      |      |
|  | Coolant  | type                        | R134a                                  |                 |                      |                      |      |
|  | Evaporator   | type                        | Copper-aluminium finned coil           |                 |                      |                      |      |
|  | Condenser  | type                        | Aluminium pipe wrapped around the tank |                 |                      |                      |      |
| Sound power levels                     |  | dB(A)                       | 60                                     | 59              | 59                   | 59                   |      |
| Empty weight                           | Net  | kg                          | 48.5                                   | 70              | 80                   | 100                  |      |
| <b>CODE</b>                            |  |                             | <b>2C0B600F</b>                        | <b>2C0B601F</b> | <b>2C0B602F</b>      | <b>2C0B603F</b>      |      |

## OVERALL DIMENSIONS

### MOD. 90

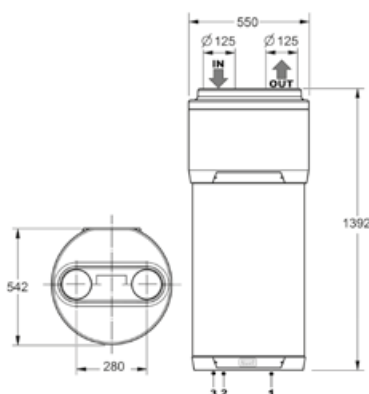

### MOD. 160 / 200 / 260

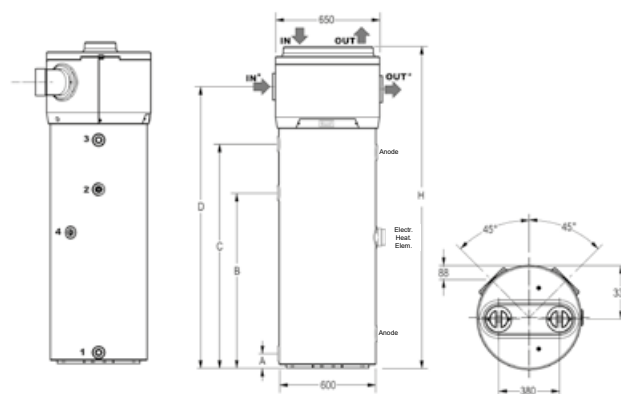

| MODEL 90               |       | UM |
|------------------------|-------|----|
| 1 Cold water inlet     | G 1/2 | "  |
| 2 Hot water outlet     | G 1/2 | "  |
| 3 Condensate discharge | G 1/2 | "  |

| MODELS 160 / 200 / 260 |       | UM |
|------------------------|-------|----|
| 1 Cold water inlet     | G 1   | "  |
| 2 Recirculation        | G 3/4 | "  |
| 3 Hot water outlet     | G 1   | "  |
| 4 Condensate discharge | G 1/2 | "  |

|          | 160  | 200  | 260  | UM |
|----------|------|------|------|----|
| <b>A</b> | 68   | 68   | 68   | mm |
| <b>B</b> | 1085 | 1085 | 1085 | mm |
| <b>C</b> | 894  | 1104 | 1394 | mm |
| <b>D</b> | 1254 | 1464 | 1754 | mm |
| <b>H</b> | 1504 | 1714 | 2004 | mm |

# AQUA<sup>1</sup> PLUS LT

## WATER HEATER WITH HEAT PUMP FOR FLOOR STANDING INSTALLATION WITH NEGATIVE AIR TEMPERATURES

ERP



### > GENERAL CHARACTERISTICS:

- Air heat pump and integrated storage tank for the production of domestic hot water
- Active defrosting system to function correctly down to an air temperature of -7°C
- Possibility of ducting intake and ejection air
- Vertical column installation
- Possibility of air return or ejection in vertical or horizontal configuration
- Electrical heating element fitted in
- Simple and intuitive control panel on board the machine
- Enamelled steel water storage tanks with 50 mm polyurethane insulation
- Main aluminium heat exchanger outside of the tank
- Set-up with solar coil
- Double anti-corrosion magnesium anode
- With antilegionella cycle
- Set-up (2 digital inputs) for activation with availability of photovoltaic energy.
- Set-up (1 digital input) for deactivation with availability of solar energy.

The control system, controlled by an easy to use and intuitive panel on-board the machine, uses programmable adjustments. This makes it possible to select the various operating modes (Automatic, Economy and Overboost).


The adjustment features a series of daily and weekly timed controls so as to combine operation with the various tariff time slots.

The internal adjustment system manages and optimises the integration of energy coming from other sources: it manages the supplied electrical heating element, it stops the heat pump when solar thermal energy is available, it starts and exploits any over-production of photovoltaic electrical energy and raises the temperature of the water in the storage tank to the value set by the user (factory setting of 70°C).

### APPLICATIONS


The inlet or outlet air can be channelled to direct the flow appropriately for the various situations.

#### Use of energy that already exists outside

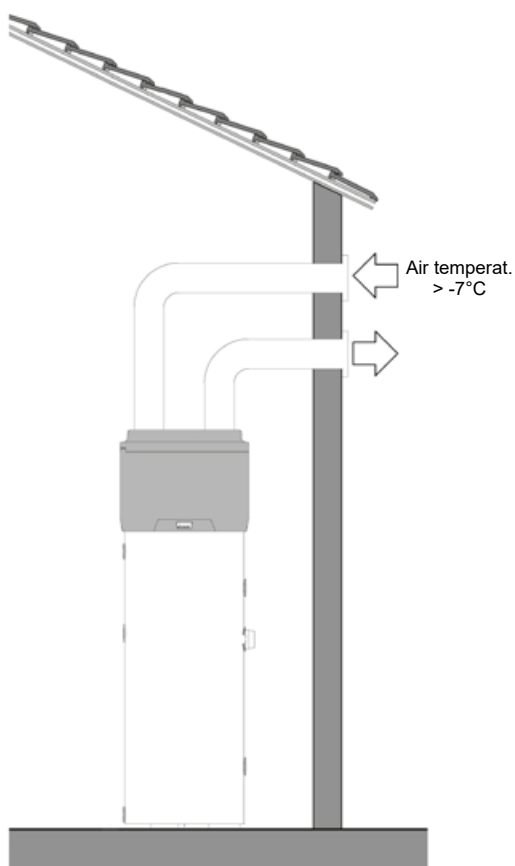

### LIMITS OF USE

**Temperature range.** The graph below indicates the temperature range of the produced air and water, which guarantees correct operation.

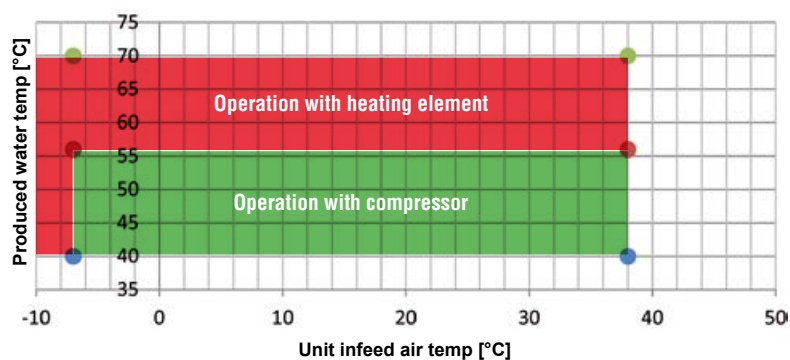

### POWER SUPPLY VOLTAGE RANGE

The table below provides the admissible variation conditions for the electrical power supply

|                          |           |         |
|--------------------------|-----------|---------|
| Standard power supply    | 230-1-50  | V-ph-Hz |
| Admissible voltage range | 207 - 254 | V       |

## GENERAL TECHNICAL DATA


| AQUA <sup>+</sup> PLUS                 |  |                   | 200 LT                                 | 260 LT          |
|--|--|-------------------|--|-----------------|
| Heat Pump                              | ERP Class  | (Class F - A*)    | <b>A*</b>                              | <b>A*</b>       |
|  | Power supply   | V-f-Hz            | 230-1-50                               |                 |
|  | Heat output <sup>(ISO)</sup>   | W                 | 1820                                   | 1820            |
|  | Total absorbed power in heating <sup>(ISO)</sup>                             | W                 | 430                                    | 430             |
|  | COP <sup>(ISO)</sup>   | W/W               | 4.23                                   | 4.23            |
|  | Rated current in heating <sup>(ISO)</sup>                                    | A                 | 2.00                                   | 2.00            |
|  | Total maximum absorbed power in heating                                      | W                 | 530                                    | 530             |
|  | Maximum current in heating   | A                 | 2.43                                   | 2.43            |
|  | Heating time <sup>(EN) (1)</sup>   | h:min             | 8:17                                   | 10:14           |
|  | Heating energy <sup>(EN) (1)</sup>   | kWh               | 3.25                                   | 3.99            |
|  | Consumption in stand-by <sup>(EN) (1)</sup>                                  | W                 | 29                                     | 29              |
|  | Class of use <sup>(EN) (1)</sup>   | Type              | L                                      | XL              |
|  | Electrical consumption during the operating cycle WEL-TC <sup>(EN) (2)</sup> | kWh               | 3.97                                   | 6.19            |
|  | COPDHW <sup>(EN) (1)</sup>   | W/W               | 2.94                                   | 3.08            |
|  | Water reference temperature <sup>(EN) (1)</sup>                              | °C                | 53.7                                   | 52.7            |
|  | Maximum quantity of usable water <sup>(EN) (2)</sup>                         | m <sup>3</sup>    | 0.275                                  | 0.342           |
|  | Heating efficiency ref standard <sup>(EU)</sup>                              | %                 | 117                                    | 121             |
|  | Annual consumption of electrical energy <sup>(EU)</sup>                      | kWh/year          | 879                                    | 1393            |
|  | Electrical heating element   | Power             | W                                      | 1500            |
| Current                                |  | A                 | 6.5                                    | 6.5             |
| Heat Pump + electrical heating element | Total absorbed power   | W                 | 1960                                   | 1960            |
|  | Rated current  | A                 | 8.5                                    | 8.5             |
|  | Maximum total absorbed power   | W                 | 2030                                   | 2030            |
| Storage                                | Maximum current  | A                 | 8.93                                   | 8.93            |
|  | Storage capacity   | l                 | 196                                    | 248             |
|  | Maximum pressure   | MPa               | 0.7                                    | 0.7             |
|  | Material   | type              | Enamelled steel                        |                 |
|  | Cathodic protection  | type              | Mg anode                               |                 |
| Air circuit                            | Type/thickness insulation  | type/mm           | polyurethane/50                        |                 |
|  | Fan type   | type              | Centrifugal                            |                 |
|  | Air flow rate  | m <sup>3</sup> /h | 350-500                                | 350-500         |
|  | Duct diameter  | mm                | 160                                    | 160             |
| Cooling circuit                        | Maximum available head   | Pa                | 200                                    | 200             |
|  | Compressor   | type              | Rotary                                 |                 |
|  | Coolant  | type              | R134a                                  |                 |
|  | Evaporator   | type              | Copper-aluminium finned coil           |                 |
|  | Condenser  | type              | Aluminium pipe wrapped around the tank |                 |
| Solar coil                             | Material   | type              | Enamelled steel                        |                 |
|  | Total surface area   | m <sup>2</sup>    | 0.6                                    | 1.0             |
|  | Maximum pressure   | Mpa               | 0.7                                    | 0.7             |
| Sound power levels                     |  | dB(A)             | 60                                     | 60              |
| Empty weight                           | Net  | kg                | 99                                     | 115.2           |
| <b>CODE</b>                            |  |                   | <b>2C0B604F</b>                        | <b>2C0B605F</b> |

**NOTES** (ISO): data according to standard ISO 255-3  
 (EN): data according to standard EN 16147:2011  
 (EU): data according to standard EU 812/2013

(1): heating cycle: Room temperature = 15°C D.B. / 12°C W.B. • Initial water temperature = 10°C  
 (2): Maximum temperature of use 40°C • Inlet water temperature 10°C

## OVERALL DIMENSIONS

### MOD. 200 / 260

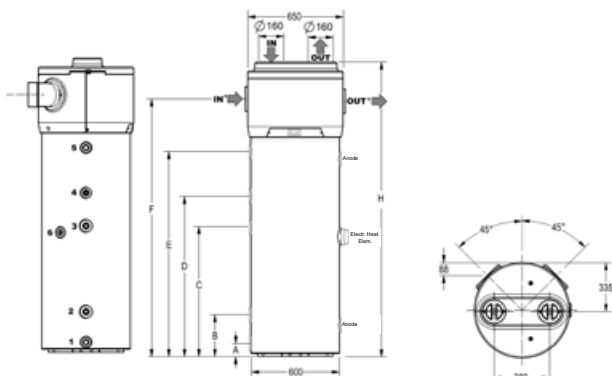

| MODELS 200 / 260       | UM         |
|------------------------|------------|
| 1 Cold water inlet     | G 1 "      |
| 2 Solar coil           | G 1" 1/4 " |
| 3 Solar coil           | G 1" 1/4 " |
| 4 Recirculation        | G 3/4 "    |
| 5 Hot water outlet     | G 1 "      |
| 6 Condensate discharge | G 1/2 "    |

|   | 200  | 260  | UM |
|---|------|------|----|
| A | 68   | 68   | mm |
| B | 275  | 275  | mm |
| C | 570  | 860  | mm |
| D | 1085 | 1085 | mm |
| E | 1104 | 1394 | mm |
| F | 1464 | 1754 | mm |
| H | 1714 | 2004 | mm |

# OMNIA HYBRID C



## REVERSIBLE HYBRID AIR-WATER HEAT PUMPS FOR SPLIT INSTALLATION WITH INSTANTANEOUS DHW PRODUCTION


### > GENERAL CHARACTERISTICS:

- The family of **OMNIA HYBRID C hybrid heat pumps** integrates the technology of the **heat pump** and the **condensing boiler** with instantaneous dhw production in a single compact product.
- This represents the **ideal solution for replacing old existing boilers, also on high temperature system with radiators.**
- The **compact dimensions**, similar to those of a wall-hung boiler, make it easier to replace without losing significant space or requiring significant restructuring work.
- **Internal electronics**, by running the boiler or the heat pump as the climatic conditions vary, **optimise the output of the system** by always working in the **most economic consumption-related modes possible.**
- **During heat pump operation** in heating or conditioning mode, **the boiler can produce dhw at the same time** without interfering on heat pump operation, **thereby maximising the comfort of both services.**
- If the **heat pump is partially or fully blocked, the boiler can operate separately in heating and dhw production.**
- IT IS composed of an **external inverter unit** available in 3 power sizes associated with an **internal condensation unit with integrated** hydronic module for cooling circuit control.
- A highly versatile system **that can operate in particularly cold climatic conditions** (outdoor air down to -20°C).
- **The split cooling circuit avoids the risk of freezing** in particularly cold outdoor applications.
- **The user interface** is composed of a **digital remote controller** equipped with a large display and simple setting controls.



### > CHARACTERISTICS OF EXTERNAL UNIT:

- Approved for **outdoor operation in completely exposed site.**
- **Breakaway starting current** thanks to Inverter technology.
- **Compressor with twin rotary DC INVERTER motor** on vibration damping supports and wrapped in double layer of soundproofing material to reduce vibrations and noise to a minimum.
- The compressor is also equipped with **casing oil heating element.**
- Two-flow electronic expansion vessel, cycle inversion valve.
- **Axial fans with brushless DC** motor complete with protective grids.
- **Outdoor air temperature probe already installed on the unit.**



### > CHARACTERISTICS OF INTERNAL UNIT:

- A particularly sturdy boiler, **suitable for replacements even in particularly critical and resistant systems.**
- **Combustion module with high modulation range (1:10) with high thickness stainless steel primary exchanger, with larger** passes maintaining high efficiency even on old systems with oxidation and soiling
- **M.G.R:** Methane, LPG, Propane air Ready, with a simple configuration the internal unit can run on natural gas, lpg without the use of any additional conversion kits.
- **MC:** Multi Combustion Control, combustion system with **gas-adaptive patented technology** for better adaptability of use to the varying gas network conditions (ex. pressure fluctuations or drops)
- **F.P.S:** Flue gas Protection System. The standard flue gas check valve offers easy connection to pressurised collective flue systems
- **Particularly suitable for operation in flues requiring "heavy duty" pipes** thanks to approval for operation with **flue gas exhaust with a diameter of 50mm.**
- **Can be combined with preheating systems for the domestic hot water.**
- **Place of installation:** also for outdoor use in a partially protected place that is up to -5°C, as standard

### > THE CONTROL SYSTEM

- Comprised of a wired-remote digital controller (max 50 m from the I.U).
- **Heating and cooling system:** for single-zone systems it is possible to use the control unit as a room thermostat.
- **Energy sources:** the boiler can be started in Integration or Replacement of the heat pump and also if the heat pump is not working.
- **Silenced mode:** according to a programmed schedule, this reduces the maximum frequency of the compressor and the fan speed, to reduce the generated noise and the power absorbed by the unit.
- **Eco Mode:** possibility of defining a time slot in hot mode where the heat pump runs with a sliding setpoint defined by the chosen climatic curve. There are 8 climatic curves for low temperature systems (radiant floor) and 8 climatic curves for fan coil or radiator systems).
- **Weekly programming:** this makes it possible to set a different schedule for each day of the week defining the operating mode for each time slot (COLD/HOT) and the work setpoint.





| GENERAL DATA  |                 | OMNIA HY 04E 28 C             |     | OMNIA HY 06E 28 C |     | OMNIA HY 08E 28 C |     |
|---|-----------------|-------------------------------|-----|-------------------|-----|-------------------|-----|
| ERP class in heating / Seasonal efficiency medium temperature (produced water 55°C) | (Class G - A++) | <b>A++</b>                    | 127 | <b>A++</b>        | 133 | <b>A++</b>        | 126 |
| ERP class in heating / Seasonal efficiency low temperature (produced water 35°C)    | (Class G - A++) | <b>A++</b>                    | 183 | <b>A++</b>        | 187 | <b>A++</b>        | 171 |
| Electric power supply   | V-ph-Hz         | 220-240V ~ 50 Hz              |     |                   |     |                   |     |
| Type of compressor  | -               | Twin Rotary                   |     |                   |     |                   |     |
| No. of compressors / No. of cooling circuits  | No.             | 1/1                           |     |                   |     |                   |     |
| Type of exchanger system side   | -               | brazed stainless steel plates |     |                   |     |                   |     |
| Type of exchanger source side   | -               | finned coil                   |     |                   |     |                   |     |
| Type of fans  | -               | brushless DC                  |     |                   |     |                   |     |
| No. of fans   | No.             | 1                             |     |                   |     |                   |     |
| Cooler fittings - liquid line   | ø               | 9.52                          |     |                   |     |                   |     |
| Cooler fittings - gas line  | ø               | 15.88                         |     |                   |     |                   |     |
| Internal unit expansion vessel volume   | l               | 8                             |     |                   |     |                   |     |
| SWL - External unit sound power level*  | dB(A)           | 62                            |     | 66                |     | 69                |     |
| SWL - Internal unit sound power level*  | dB(A)           |                               |     | 43                |     |                   |     |
| External unit weight  | kg              | 60                            |     | 60                |     | 76                |     |
| Internal unit weight  | kg              |                               |     | 28                |     |                   |     |

**NOTE:** Efficiency class calculated according to European regulation 811/2013. The values refer to units without any optional features or accessories.

\* **SWL** = Sound power levels, referring to  $1 \times 10^{-12}$  W with unit operating in **A7W55** conditions

The Total sound power level in dB(A) is measured in accordance with standard ISO 9614. The Total Sound Power in dB(A) which is therefore the only binding sound data. The sound pressure levels are values calculated from the sound power level (SWL) by applying the relations of ISO-3744.

| HEAT PUMP PERFORMANCE |                  |       | OMNIA HY 04E 28 C | OMNIA HY 06E 28 C | OMNIA HY 08E 28 C |
|-----------------------|------------------|-------|-------------------|-------------------|-------------------|
| <b>A7W35</b>          | Heat output      | kW    | 4.10              | 6.10              | 8.00              |
|                       | Absorbed power   | kW    | 0.82              | 1.29              | 1.73              |
|                       | COP              | kW/kW | 5.00              | 4.73              | 4.62              |
| <b>A7W45</b>          | Heat output      | kW    | 4.01              | 5.96              | 7.34              |
|                       | Absorbed power   | kW    | 1.13              | 1.68              | 2.13              |
|                       | COP              | kW/kW | 3.55              | 3.55              | 3.45              |
| <b>A35W18</b>         | Cooling capacity | kW    | 4.10              | 6.20              | 8.00              |
|                       | Absorbed power   | kW    | 0.84              | 1.43              | 1.93              |
|                       | EER              | kW/kW | 4.88              | 4.34              | 4.15              |
| <b>A35W7</b>          | Cooling capacity | kW    | 4.12              | 6.15              | 6.44              |
|                       | Absorbed power   | kW    | 1.30              | 2.08              | 2.24              |
|                       | EER              | kW/kW | 3.17              | 2.96              | 2.88              |

The values refer to units without any optional features or accessories.

Data declared according to **EN 14511**:

**EER** (Energy Efficiency Ratio) = ratio of cooling capacity in relation to absorbed power

**COP** (Coefficient Of Performance) = ratio of heat output in relation to absorbed power

**A7W35** = source : air in 7°C D.B. 6°C W.B. / system : water in 30°C out 35°C

**A7W45** = source : air in 7°C D.B. 6°C W.B. / system : water in 40°C out 45°C




**A35W18** = source : air in 35°C D.B. / system : water in 23°C out 18°C

**A35W7** = source : air in 35°C D.B. / system : water in 12°C out 7°C

**NOTE:** Efficiency class calculated according to European regulation **811/2013**. The values refer to units without any optional features or accessories.

| THERMAL GENERATOR PERFORMANCE          |       | OMNIA HY 04E 28 C | OMNIA HY 06E 28 C | OMNIA HY 08E 28 C |
|--|-------|-------------------|-------------------|-------------------|
| Heating max /min heat input (Hs)       | kW    |                   | 27.2 / 3.2        |                   |
| Heating max /min heat output (80/60°C) | kW    |                   | 24 / 2.8          |                   |
| Heating max /min heat output (50/30°C) | kW    |                   | 26 / 3.1          |                   |
| DHW max / min heat input (Hi)          | kW    |                   | 28.5 / 2.9        |                   |
| DHW max / min heat output              | kW    |                   | 28.0 / 2.8        |                   |
| Efficiency Pmax / Pmin (80-60°C) (Hi)  | %     |                   | 98.1 / 98         |                   |
| Efficiency Pmax / Pmin (50-30°C) (Hi)  | %     |                   | 106.1 / 107.5     |                   |
| Efficiency 30% (Hi)                    | %     |                   | 109.7             |                   |
| Max / min heating operating pressure   | bar   |                   | 3 / 0.8           |                   |
| DHW max / min operating pressure       | bar   |                   | 9 / 0.3           |                   |
| DHW flow rate Δt 25°C                  | l/min |                   | 16.1              |                   |
| DHW flow rate Δt 30°C                  | l/min |                   | 13.4              |                   |
| <b>CODE EU + IU</b>                    |       | <b>OXHO4GWA</b>   | <b>OXHO6GWA</b>   | <b>OXHO8GWA</b>   |


## OPERATING LIMITS

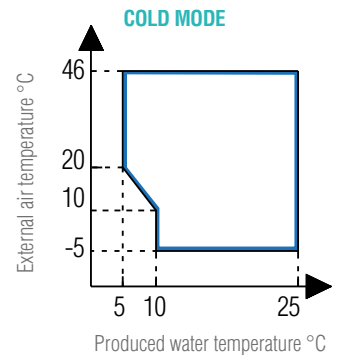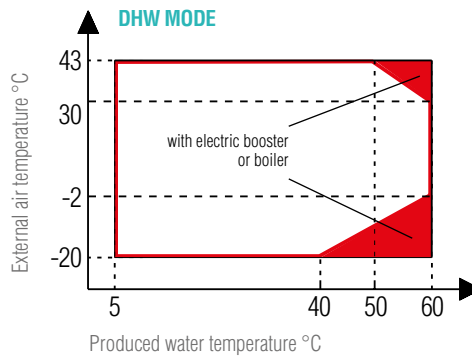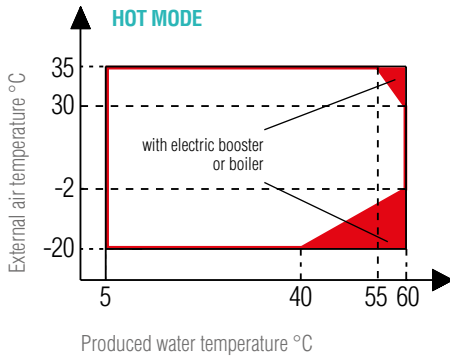


**NOTE ON DHW MODE:** Produced water temperature means the water temperature produced by the unit and not the DHW temperature available to the user which is a function of this parameter and of the surface of the coil of the DHW tank.

## OVERALL DIMENSIONS OF EXTERNAL UNIT

mod. 4 - 6

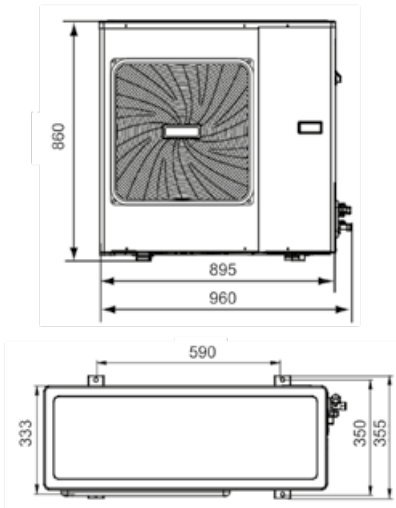


mod. 8

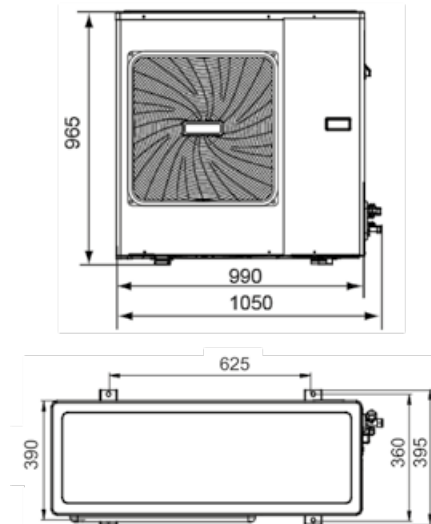


## MINIMUM OPERATING SPACES


### INTERNAL UNIT

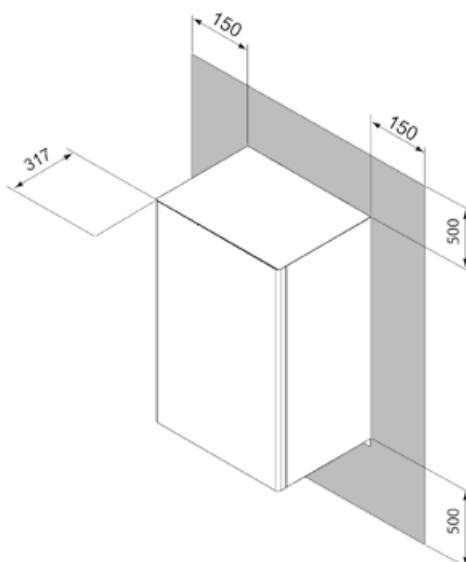

### EXTERNAL UNIT

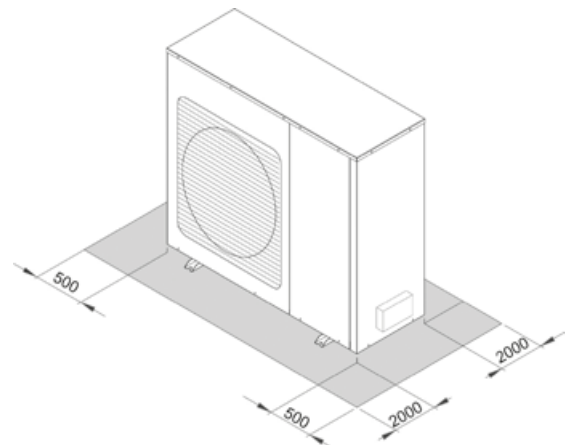


## OVERALL DIMENSIONS OF INTERNAL UNIT

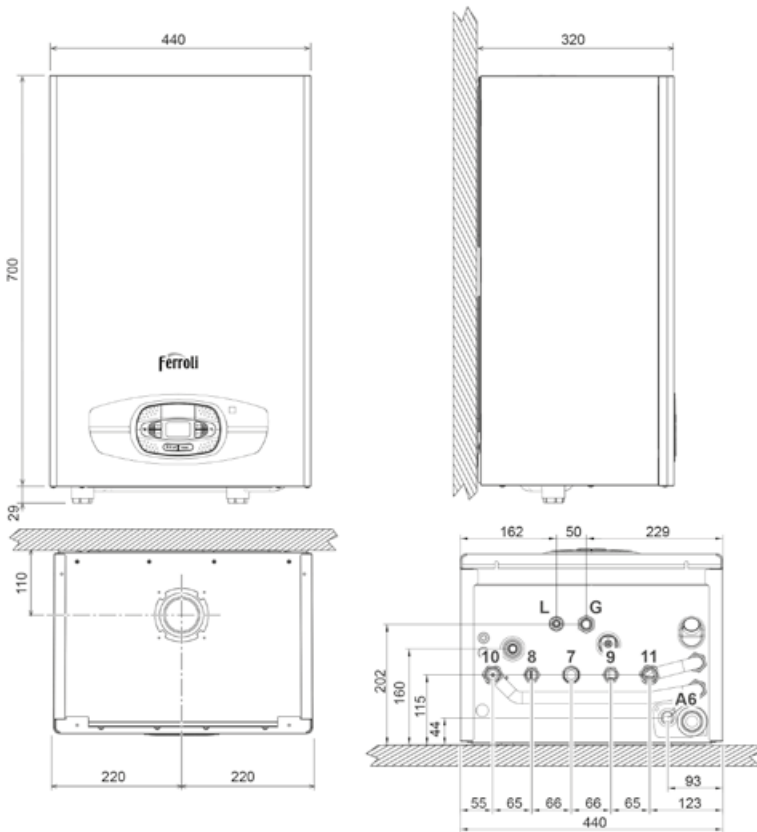

### > KEY

- 7 Gas inlet - Ø 3/4"
- 8 DHW water outlet - Ø 1/2"
- 9 DHW inlet - Ø 1/2"
- 10 System flow - Ø 3/4"
- 11 System return - Ø 3/4"
- A6 Condensate discharge connection
- L Liquid line
- G Gas line

## EXAMPLE OF SYSTEM DIAGRAM

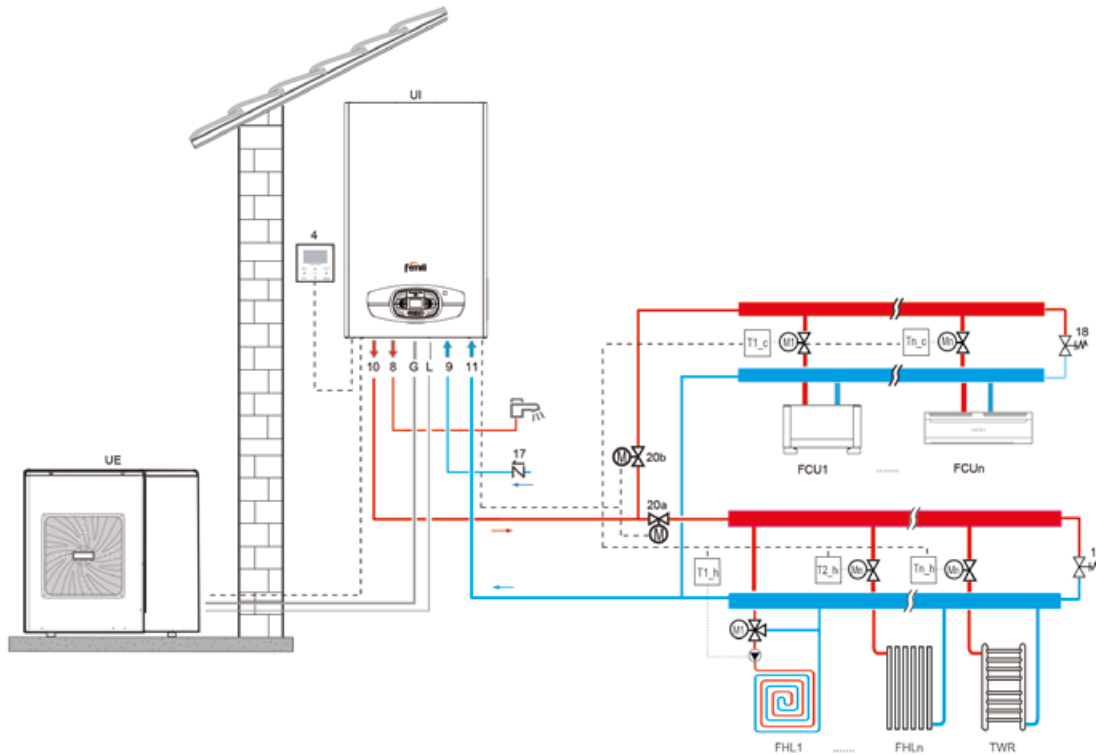

### > KEY

**IU** Internal unit **EU** External unit **4** Wired remote control (provided per standard with the heat pump) **8** DHW outlet - Ø 1/2" **9** DHW inlet - Ø 1/2" **10** System flow - Ø 3/4" **11** System return - Ø 3/4" **17** Check valve (not supplied) **18** Bypass valve (not supplied) **20a** Two-way valve (not supplied), controlled by SV2 **20b** Two-way valve (not supplied), controlled by SV2 in denied logic **G** Gas Line **L** Liquid Line **T1\_c - Tn\_c** Cold request room thermostat (not supplied) **T1\_h - Tn\_h** Hot request room thermostat (not supplied) **FCU 1...n** Air terminal: it can only be used for cooling with radiant floor heating or for cooling and heating without radiant floor **FHL 1...n** Radiant floor / radiator only heating in zones **TWR** Integration of towel warmer in bathroom: if connected to the heating system it must be integrated with an electrical resistor (R) actuated by the control (C) which closes the valve at the same time (M); if not connected to the system, heating is provided by the resistor only (R) actuated by the control (C) - - - - Electrical connections

# OMNIA HYBRID H

ERP



## AIR-WATER REVERSIBLE HYBRID HEAT PUMPS FOR SPLIT INSTALLATION, COMBINABLE WITH EXTERNAL DHW STORAGE TANK

### > GENERAL CHARACTERISTICS:

- The family of **OMNIA HYBRID H hybrid heat pumps** integrates the technology of the **heat pump** and the **heating-only condensing boiler** in a single compact product
- **It is the ideal solution for new builds and «major» renovations**
- The **compact dimensions**, similar to those of a wall-hung boiler, make it easier to replace without losing significant space or requiring significant restructuring work.
- **The internal electronics**, by turning on the boiler or heat pump as the climatic conditions vary, **optimise the efficiency of the system** by always running in the **most economically convenient modes in terms of consumption**.
- **During heat pump operation** in heating or in conditioning, **the boiler can simultaneously produce DHW in the external DHW storage** without interfering on the operation of the heat pump, **thereby maximising the comfort** of both services.
- If the **heat pump is partially or fully blocked**, the boiler can operate separately in heating and dhw production.
- IT IS comprised of an **inverter external unit** available in 3 power sizes associated to an **internal condensation unit with integrated** hydronic module to control the cooling circuit.
- A highly versatile system **that operates in particularly cold climatic conditions** (outdoor air down to -20°C).
- **The split cooling circuit avoids the risk of freezing** in particularly cold outdoor applications.
- **The user interface** is comprised of a **digital remote controller** equipped with a large screen and simple settings controls.

### > CHARACTERISTICS OF THE EXTERNAL UNIT:

- Approved for **outdoor operation in completely exposed site**.
- **Breakaway starting current** thanks to Inverter technology.
- **Compressor** with **twin rotary DC INVERTER motor** on vibration damping supports and wrapped in double layer of soundproofing material to reduce vibrations and noise to a minimum.
- The compressor is also equipped with **casing oil heating element**.
- Two-flow electronic expansion vessel, cycle inversion valve.
- **Axial fans** with **brushless DC** motor complete with protective grids.
- **Outdoor air temperature probe already installed on the unit**.

### > CHARACTERISTICS OF INTERNAL UNIT:

- **Combustion module with high modulation range with high thickness stainless steel primary exchanger with larger passes that maintains** high efficiency even on old systems with oxidation and fouling.
- **M.G.R.:** Methane, LPG, Propane air Ready, with a simple configuration the internal unit can run on natural gas, lpg without the use of any additional conversion kits.
- **MC:** Multi Combustion Control, combustion system with **gas-adaptive patented technology** for better adaptability of use to the varying gas network conditions (ex. pressure fluctuations or drops)
- **F.P.S.:** Flue gas Protection System. The standard flue gas check valve offers easy connection to pressurised collective flue systems
- **Particularly suitable for operation in flues requiring “heavy duty” pipes** thanks to approval for operation with **flue gas exhaust with a diameter of 50mm**.
- **Place of installation:** also for outdoor use in a partially protected place that is up to -5°C, as standard

### > THE CONTROL SYSTEM

- Comprised of a wired-remote digital controller (max 50 m from the I.U).
- **Heating and cooling system:** for single-zone systems it is possible to use the control unit as a room thermostat.
- **Energy sources:** the boiler can be started in Integration or Replacement of the heat pump and also if the heat pump is not working.
- **Silenced mode:** according to a programmed schedule, this reduces the maximum frequency of the compressor and the fan speed, to reduce the generated noise and the power absorbed by the unit.
- **Eco Mode:** possibility of defining a time slot in hot mode where the heat pump **runs with a sliding setpoint defined by the chosen climatic curve**. There are 8 climatic curves for low temperature systems (radiant floor) and 8 climatic curves for fan coil or radiator systems).
- **Weekly programming:** this makes it possible to set a different schedule for each day of the week defining the operating mode for each time slot (COLD/HOT) and the work setpoint.



| GENERAL DATA  |                 | OMNIA HY 04E 24 H             |     | OMNIA HY 06E 24 H |     | OMNIA HY 08E 24 H |     |
|---|-----------------|-------------------------------|-----|-------------------|-----|-------------------|-----|
| ERP class in heating / Seasonal efficiency medium temperature (produced water 55°C) | (Class G - A++) | <b>A++</b>                    | 127 | <b>A++</b>        | 133 | <b>A++</b>        | 126 |
| ERP class in heating / Seasonal efficiency low temperature (produced water 35°C)    | (Class G - A++) | <b>A++</b>                    | 183 | <b>A++</b>        | 187 | <b>A++</b>        | 171 |
| Electric power supply   | V-ph-Hz         | 220-240V ~ 50 Hz              |     |                   |     |                   |     |
| Type of compressor  | -               | Twin Rotary                   |     |                   |     |                   |     |
| No. of compressors / No. of cooling circuits  | No.             | 1/1                           |     |                   |     |                   |     |
| Type of exchanger system side   | -               | brazed stainless steel plates |     |                   |     |                   |     |
| Type of exchanger source side   | -               | finned coil                   |     |                   |     |                   |     |
| Type of fans  | -               | brushless DC                  |     |                   |     |                   |     |
| No. of fans   | No.             | 1                             |     |                   |     |                   |     |
| Cooler fittings - liquid line   | ø               | 9.52                          |     |                   |     |                   |     |
| Cooler fittings - gas line  | ø               | 15.88                         |     |                   |     |                   |     |
| Internal unit expansion vessel volume   | l               | 8                             |     |                   |     |                   |     |
| SWL - External unit sound power level*  | dB(A)           | 62                            |     | 66                |     | 69                |     |
| SWL - Internal unit sound power level*  | dB(A)           |                               |     | 43                |     |                   |     |
| External unit weight  | kg              | 60                            |     | 60                |     | 76                |     |
| Internal unit weight  | kg              |                               |     | 28                |     |                   |     |

**NOTE:** Efficiency class calculated according to European regulation 811/2013. The values refer to units without any optional features or accessories.

\* SWL = Sound power levels, referring to  $1 \times 10^{-12}$  W with unit operating in **A7W55** conditions

The Total sound power level in dB(A) is measured in accordance with standard ISO 9614. The Total Sound Power in dB(A) which is therefore the only binding sound data. The sound pressure levels are values calculated from the sound power level (SWL) by applying the relations of ISO-3744.

| HEAT PUMP PERFORMANCE |                  |       | OMNIA HY 04E 24 H | OMNIA HY 06E 24 H | OMNIA HY 08E 24 H |
|-----------------------|------------------|-------|-------------------|-------------------|-------------------|
| <b>A7W35</b>          | Heat output      | kW    | 4.10              | 6.10              | 8.00              |
|                       | Absorbed power   | kW    | 0.82              | 1.29              | 1.73              |
|                       | COP              | kW/kW | 5.00              | 4.73              | 4.62              |
| <b>A7W45</b>          | Heat output      | kW    | 4.01              | 5.96              | 7.34              |
|                       | Absorbed power   | kW    | 1.13              | 1.68              | 2.13              |
|                       | COP              | kW/kW | 3.55              | 3.55              | 3.45              |
| <b>A35W18</b>         | Cooling capacity | kW    | 4.10              | 6.20              | 8.00              |
|                       | Absorbed power   | kW    | 0.84              | 1.43              | 1.93              |
|                       | EER              | kW/kW | 4.88              | 4.34              | 4.15              |
| <b>A35W7</b>          | Cooling capacity | kW    | 4.12              | 6.15              | 6.44              |
|                       | Absorbed power   | kW    | 1.30              | 2.08              | 2.24              |
|                       | EER              | kW/kW | 3.17              | 2.96              | 2.88              |

The values refer to units without any optional features or accessories.

Data declared according to **EN 14511**:

**EER** (Energy Efficiency Ratio) = ratio of cooling capacity in relation to absorbed power

**COP** (Coefficient Of Performance) = ratio of heat output in relation to absorbed power

**A7W35** = source : air in 7°C D.B. 6°C W.B. / system : water in 30°C out 35°C

**A7W45** = source : air in 7°C D.B. 6°C W.B. / system : water in 40°C out 45°C




**A35W18** = source : air in 35°C D.B. / system : water in 23°C out 18°C

**A35W7** = source : air in 35°C D.B. / system : water in 12°C out 7°C

**NOTE:** Efficiency class calculated according to European regulation **811/2013**. The values refer to units without any optional features or accessories.

| THERMAL GENERATOR PERFORMANCE          |     | OMNIA HY 04E 24 H | OMNIA HY 06E 24 H | OMNIA HY 08E 24 H |
|--|-----|-------------------|-------------------|-------------------|
| Heating max /min heat input (Hs)       | kW  |                   | 24.2 / 3.2        |                   |
| Heating max /min heat output (80/60°C) | kW  |                   | 24 / 2.8          |                   |
| Heating max /min heat output (50/30°C) | kW  |                   | 26 / 3.1          |                   |
| Efficiency Pmax / Pmin (80-60°C) (Hi)  | %   |                   | 98.1 / 98         |                   |
| Efficiency Pmax / Pmin (50-30°C) (Hi)  | %   |                   | 106.1 / 107.5     |                   |
| Efficiency 30% (Hi)                    | %   |                   | 109.7             |                   |
| Max / min heating operating pressure   | bar |                   | 3 / 0.8           |                   |
| <b>CODE EU + IU</b>                    |     | <b>0XH04IWA</b>   | <b>0XH06IWA</b>   | <b>0XH08IWA</b>   |


## OPERATING LIMITS

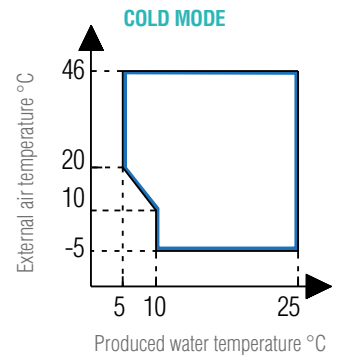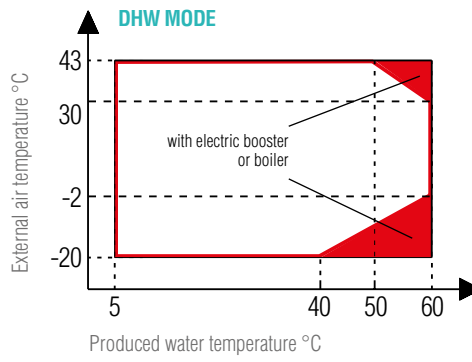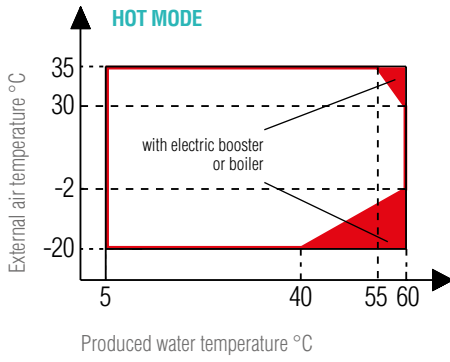


**NOTE ON DHW MODE:** Produced water temperature means the water temperature produced by the unit and not the DHW temperature available to the user which is a function of this parameter and of the surface of the coil of the DHW tank.

## OVERALL DIMENSIONS OF EXTERNAL UNIT

mod. 4 - 6

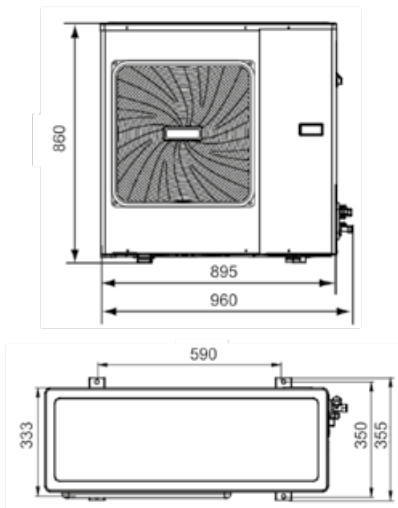


mod. 8

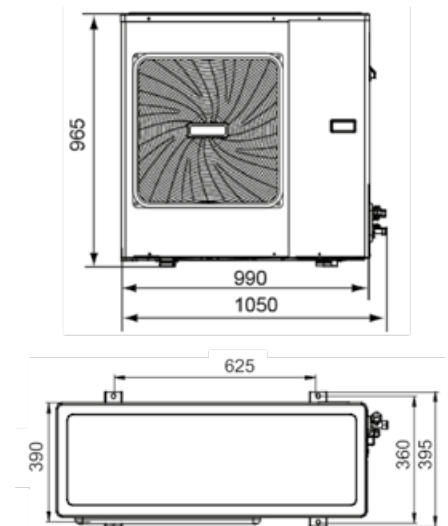


## MINIMUM OPERATING SPACES


### INTERNAL UNIT

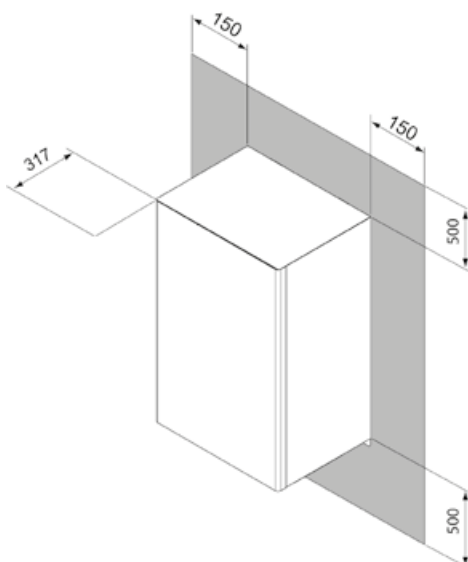

### EXTERNAL UNIT

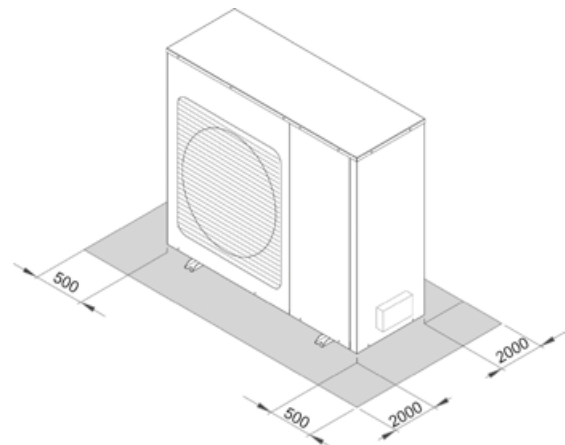


## OVERALL DIMENSIONS OF INTERNAL UNIT

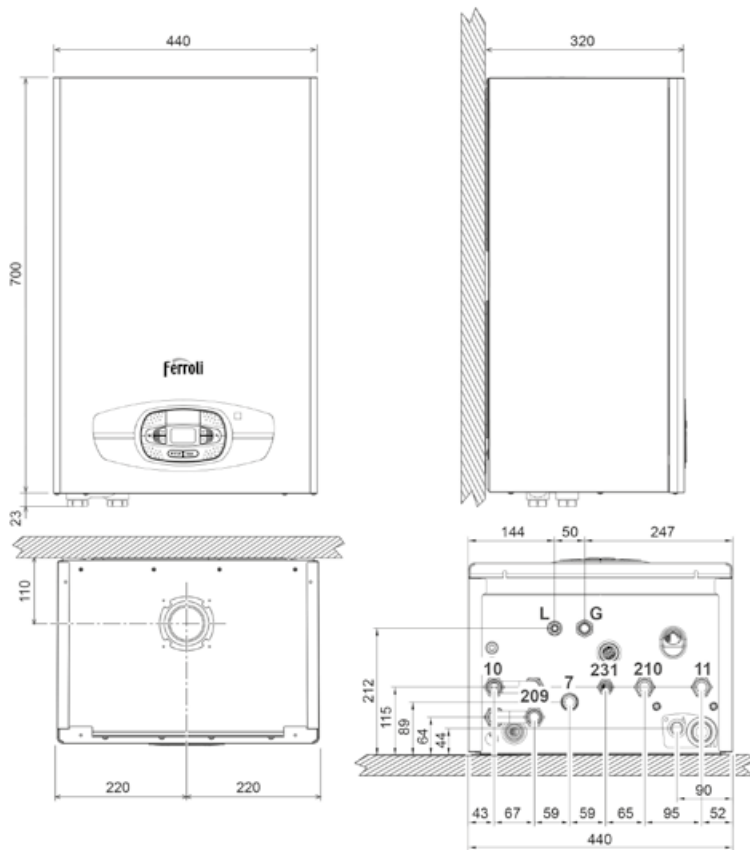

### > KEY

- 7 Gas inlet - Ø 3/4"
- 10 System flow - Ø 3/4"
- 11 System return - Ø 3/4"
- 209 Storage tank delivery - Ø 3/4"
- 210 Storage tank return - Ø 3/4"
- 231 Filling fitting - Ø 1/2"
- A6 Condensate discharge connection
- L Liquid line
- G Gas line

## EXAMPLES OF SYSTEM DIAGRAM

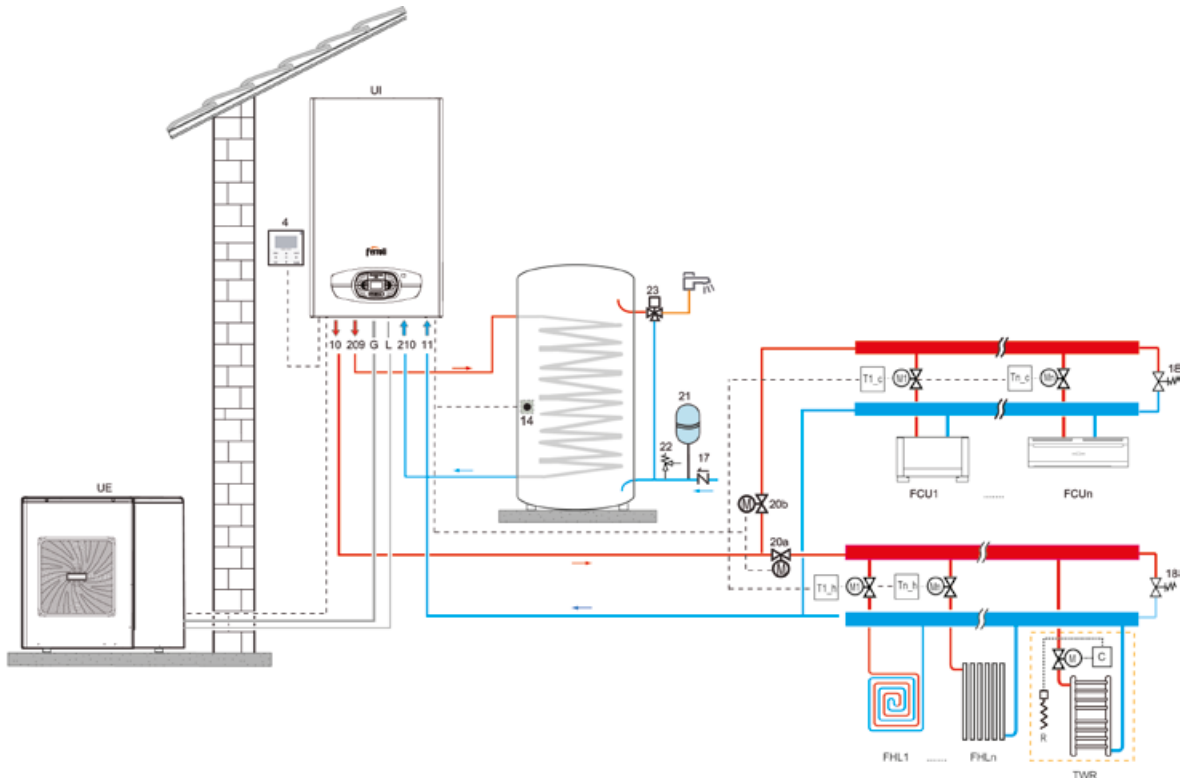

**> KEY** **IU** Internal unit **EU** External unit **4** Wired remote control (provided per standard with the heat pump) **10** System flow - Ø 3/4" **11** System return - Ø 3/4" **14** T5 temperature probe (supplied, installed by the installation technician) **17** Check valve (not supplied) **18** Bypass valve (not supplied) **20a** Two-way valve (not supplied), controlled by SV2 **20b** Two-way valve (not supplied), controlled by SV2 in denied logic **21** DHW expansion vessel (not supplied) **22** DHW safety valve (not supplied) **23** Thermostatic mixing valve (not supplied) **209** Storage tank delivery - Ø 1/2" **210** Storage tank return - Ø 1/2" **G** Gas Line **L** Liquid Line **T1\_c - Tn\_c** Cold request room thermostat (not supplied) **T1\_h - Tn\_h** Hot request room thermostat (not supplied) **FCU 1...n** Air terminal: it can only be used for cooling with radiant floor heating or for cooling and heating without radiant floor **FHL 1...n** Radiant floor / radiator only heating in zones **TWR** Integration of towel warmer in bathroom: if connected to the heating system it must be integrated with an electrical resistor (R) actuated by the control (C) which closes the valve at the same time (M); if not connected to the system, heating is provided by the resistor only (R) actuated by the control (C) - - - - Electrical connections

# OMNIA H AIR-WATER REVERSIBLE HEAT PUMPS FOR SPLIT INSTALLATION



## > GENERAL CHARACTERISTICS:

- The OMNIA H family of heat pumps meets the needs of **winter and summer air-conditioning** and the production of **domestic hot water** of small and medium power residential and commercial installations.
- IT IS comprised of an **external inverter unit** available in various power sizes associated with an internal hydronic unit available in two variants **with or without electrical integration** of 3kW **two-stage** (1.5 + 1.5), or 6 kW (models 12T and 16T) both equipped as per standard with **integrated three-way valve for the production of domestic hot water** via external storage tank.
- **The system is very versatile** and able to work at outdoor air temperatures of  $-20^{\circ}\text{C}$  and to produce **hot water up to  $60^{\circ}\text{C}$**  with the aid of electrical integration.
- Particularly suitable for use in radiant systems, fan coils, radiators and for the indirect production of domestic hot water (DHW) through an external storage tank (not supplied).
- **The split cooling circuit** avoids the risk of freezing in particularly cold outdoor applications.
- **The user interface** is comprised of a **digital remote controller** (with a max length of wire of 50 m from the internal unit) equipped with a large screen and simple settings controls.

## > CHARACTERISTICS OF OMNIA H-UE EXTERNAL UNIT:

- **Reduced breakaway starting current** thanks to Inverter technology
- **Compressor** with **twin rotary DC INVERTER motor** on rubber vibration damping supports and wrapped in double layer of soundproofing material to reduce vibrations and noise to a minimum.
- The compressor is also equipped with casing oil heating element.
- Two-flow electronic expansion vessel
- Cycle inversion valve
- **Axial fans** with brushless DC motor complete with **protective accident prevention grids**
- Finned coil made with copper pipes and aluminium fins
- **Outdoor air temperature probe already installed on the unit**
- **DHW storage tank water temperature probe supplied as per standard** (installation by the installation technician)

## > CHARACTERISTICS OF OMNIA H-UI INTERNAL UNIT:

- Available **with electrical integration** from 3kw (OMNIA HI-UI) **or without integration** (OMNIA H-UI)
- Hydraulic unit with **3-way diverter valve for DHW production supplied as per standard**
- **Water/gas exchanger** with brazed stainless steel plates
- **Low consumption plant circulator** with **brushless DC motor**
- Automatic air vent
- Water differential pressure gauge
- Water pressure gauge
- Expansion vessel
- Safety valve
- **Y water filter supplied as per standard** (installation by the installation technician)



## > THE CONTROL SYSTEM

- Comprised of a wired-remote digital controller (max 50 m from the I.U).
- **HEATING AND COOLING SYSTEM:** the compressor frequency is modulated to keep the temperature of the produced water at the established setpoint value. For single-zone systems the control unit can operate as a room thermostat.
- **DOMESTIC HOT WATER PRODUCTION (DHW):** upon request of the DHW temperature probe (supplied as per standard), operation is activated in hot mode to maintain the temperature of the DHW tank at the established setpoint value.
- **ADDITIONAL ENERGY SOURCES:** any electrical integration boiler or booster can be started in Integration or Replacement of the heat pump and also if the heat pump is not working.
- **ANTILEGIONELLA FUNCTION:** weekly antilegionella cycles can be set. The heat pump must be integrated with DHW boiler or boiler electrical heating element.
- **FAST DHW:** this function prioritises DHW by activating all the energy sources available to bring the DHW tank to the established setpoint in the shortest possible amount of time.
- **SILENCED MODE:** according to a programmed schedule, this reduces the maximum frequency of the compressor and the fan speed, to reduce the generated noise and the power absorbed by the unit.
- **ON/OFF REQUEST:** the unit can be switched on and off by an external contact.
- **HOT/COLD REQUEST:** the unit can be started and stopped in cold or hot mode by 2 external contacts (ex the thermostat for the zone that manages the request for hot and cold / remote switch).
- **ECO:** possibility of defining a time slot in hot mode where the heat pump runs with a sliding setpoint defined by the chosen climatic curve. There are 8 climatic curves for low temperature systems (radiant floor) and 8 climatic curves for fan coil or radiator systems)
- **WEEKLY SCHEDULE PROGRAMMING:** this makes it possible to set a different schedule for each day of the week defining the operating mode for each time slot (COLD/HOT/DHW) and the work setpoint.
- Antifrost protection. Guaranteed down to  $-20^{\circ}\text{C}$  outdoor air temperature thanks to the heat pump itself
- Working in hot mode, for the electric antifrost heating element (as per standard) and the electric booster (if installed).



NEW

NEW

| GENERAL DATA  |                 | 4                             | 6       | 8       | 10      | 12      | 16      | 12T                   | 16T     |
|---|-----------------|-------------------------------|---------|---------|---------|---------|---------|-----------------------|---------|
| ERP class in heating / Seasonal efficiency medium temperature (produced water 55°C) | (Class G - A++) | A++ 127                       | A++ 130 | A++ 125 | A++ 127 | A++ 127 | A++ 128 | A++ 128               | A++ 130 |
| ERP class in heating / Seasonal efficiency low temperature (produced water 35°C)    | (Class G - A++) | A++ 183                       | A++ 185 | A++ 170 | A++ 177 | A++ 175 | A++ 158 | A++ 184               | A++ 172 |
| Electric power supply   | V-ph-Hz         | 220-240V ~ 50 Hz              |         |         |         |         |         | 380-400V - 3N ~ 50 Hz |         |
| Type of compressor  | -               | Twin Rotary                   |         |         |         |         |         |                       |         |
| No. of compressors / No. of cooling circuits  | No.             | 1/1                           |         |         |         |         |         |                       |         |
| Type of exchanger system side   | -               | brazed stainless steel plates |         |         |         |         |         |                       |         |
| Type of exchanger source side   | -               | finned coil                   |         |         |         |         |         |                       |         |
| Type of fans  | -               | brushless DC                  |         |         |         |         |         |                       |         |
| No. of fans   | No.             | 1                             |         |         |         | 2       |         |                       |         |
| Cooler fittings - liquid line   | Ø               |                               |         |         |         | 9.52    |         |                       |         |
| Cooler fittings - gas line  | Ø               |                               |         |         |         | 15.88   |         |                       |         |
| Internal unit expansion vessel volume   | l               | 10                            |         |         |         |         |         |                       |         |
| Internal unit safety valve calibration  | bar             | 3                             |         |         |         |         |         |                       |         |
| Two-stage integrative electrical heating elements *                                 | kW              | 3 (1.5 + 1.5)                 |         |         |         |         |         | 6 (4 + 2)             |         |
| SWL - Sound power level*  | dB(A)           | 62                            | 66      | 69      | 67      | 68      | 72      | 70                    | 72      |
| SWL - Internal unit sound power level*  | dB(A)           |                               |         |         |         | 45      |         |                       |         |
| External unit weight  | kg              | 60                            | 60      | 76      | 99      | 99      | 99      | 115                   | 115     |
| Internal unit weight of base unit   | kg              | 31.5                          |         |         |         | 33.5    |         |                       |         |
| Internal unit weight of unit with integrative electrical heating elements           | kg              | 33                            |         |         |         | 35      |         |                       |         |

**NOTE:** Efficiency class calculated according to European regulation 811/2013. The values refer to units without any optional features or accessories.

\* SWL = Sound power levels, referring to  $1 \times 10^{-12}$  W with unit operating in A7W55 conditions

The Total sound power level in dB(A) is measured in accordance with standard ISO 9614. The Total Sound Power in dB(A) which is therefore the only binding sound data. The sound pressure levels are values calculated from the sound power level (SWL) by applying the relations of ISO-3744.




| PERFORMANCE DATA                          |                  | 4                  | 6                  | 8                  | 10                 | 12                 | 16                 | 12T                 | 16T                 |       |
|---|------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|---------------------|---------------------|-------|
| A7W35                                     | Heat output      | kW                 | 4.10               | 6.10               | 8.00               | 10.00              | 12.10              | 15.50               | 12.00               | 15.50 |
|   | Absorbed power   | kW                 | 0.82               | 1.29               | 1.73               | 2.17               | 2.74               | 3.82                | 2.66                | 3.79  |
|   | COP              | kW/kW              | 5.00               | 4.73               | 4.62               | 4.61               | 4.42               | 4.06                | 4.51                | 4.09  |
|   | Water flow rate  | l/h                | 705                | 1049               | 1376               | 1720               | 2081               | 2666                | 2064                | 2666  |
|   | Effective head   | kPa                | 79                 | 68                 | 53                 | 42                 | 21                 | 0                   | 22                  | 0     |
| A7W45                                     | Heat output      | kW                 | 4.01               | 5.96               | 7.34               | 10.12              | 11.85              | 16.05               | 11.97               | 15.48 |
|   | Absorbed power   | kW                 | 1.13               | 1.68               | 2.13               | 2.93               | 3.48               | 5.03                | 3.5                 | 4.87  |
|   | COP              | kW/kW              | 3.55               | 3.55               | 3.45               | 3.45               | 3.41               | 3.19                | 3.42                | 3.18  |
|   | Water flow rate  | l/h                | 690                | 1025               | 1262               | 1741               | 2038               | 2761                | 2059                | 2663  |
|   | Effective head   | kPa                | 79                 | 69                 | 58                 | 41                 | 24                 | 0                   | 23                  | 0     |
| A35W18                                    | Cooling capacity | kW                 | 4.10               | 6.20               | 8.00               | 10.50              | 11.70              | 13.80               | 12.00               | 14.50 |
|   | Absorbed power   | kW                 | 0.84               | 1.43               | 1.93               | 2.30               | 2.79               | 3.77                | 2.8                 | 3.94  |
|   | EER              | kW/kW              | 4.88               | 4.34               | 4.15               | 4.57               | 4.19               | 3.66                | 4.29                | 3.68  |
|   | Water flow rate  | l/h                | 705                | 1066               | 1376               | 1806               | 2012               | 2374                | 2064                | 2494  |
|   | Effective head   | kPa                | 79                 | 67                 | 53                 | 37                 | 26                 | 3                   | 22                  | 0     |
| A35W7                                     | Cooling capacity | kW                 | 4.12               | 6.15               | 6.44               | 9.39               | 11.02              | 12.85               | 11.7                | 12.91 |
|   | Absorbed power   | kW                 | 1.30               | 2.08               | 2.24               | 3.26               | 4.17               | 5.39                | 4.65                | 5.52  |
|   | EER              | kW/kW              | 3.17               | 2.96               | 2.88               | 2.88               | 2.64               | 2.38                | 2.52                | 2.34  |
|   | Water flow rate  | l/h                | 709                | 1058               | 1108               | 1615               | 1895               | 2210                | 2012                | 2221  |
|   | Effective head   | kPa                | 79                 | 67                 | 65                 | 47                 | 32                 | 13                  | 26                  | 13    |
| <b>BASE SYSTEM</b>                        |                  | <b>OMNIA H 04</b>  | <b>OMNIA H 06</b>  | <b>OMNIA H 08</b>  | <b>OMNIA H 10</b>  | <b>OMNIA H 12</b>  | <b>OMNIA H 16</b>  | <b>OMNIA H 12T</b>  | <b>OMNIA H 16T</b>  |       |
| <b>CODE EU + IU</b>                       |                  | <b>0XH04AWA</b>    | <b>0XH06AWA</b>    | <b>0XH08AWA</b>    | <b>0XHOAAWA</b>    | <b>0XHOCAWA</b>    | <b>0XHOGAWA</b>    | <b>0XHPCAWA</b>     | <b>0XHPGAWA</b>     |       |
| <b>SYSTEM WITH ELECTRICAL INTEGRATION</b> |                  | <b>OMNIA HI 04</b> | <b>OMNIA HI 06</b> | <b>OMNIA HI 08</b> | <b>OMNIA HI 10</b> | <b>OMNIA HI 12</b> | <b>OMNIA HI 16</b> | <b>OMNIA HI 12T</b> | <b>OMNIA HI 16T</b> |       |
| <b>CODE EU + IU</b>                       |                  | <b>0XH04BWA</b>    | <b>0XH06BWA</b>    | <b>0XH08BWA</b>    | <b>0XHOABWA</b>    | <b>0XHOCBWA</b>    | <b>0XHGBWA</b>     | <b>0XHPCBWA</b>     | <b>0XHPGBWA</b>     |       |

The values refer to units without any optional features or accessories.

Data declared according to EN 14511: EER (Energy Efficiency Ratio) = ratio of cooling output in relation to absorbed power COP (Coefficient Of Performance) = ratio of heating capacity in relation to absorbed power A7W35 = source : air in 7°C D.B. / system : water in 30°C out 35°C A7W45 = source : air in 7°C D.B. / system : water in 40°C out 45°C A35W18 = source : air in 35°C D.B. / system : water in 23°C out 18°C A35W7 = source : air in 35°C D.B. / system : water in 12°C out 7°C

**NOTE:** Efficiency class calculated according to European regulation 811/2013. The values refer to units without any optional features or accessories.

## OPERATING LIMITS

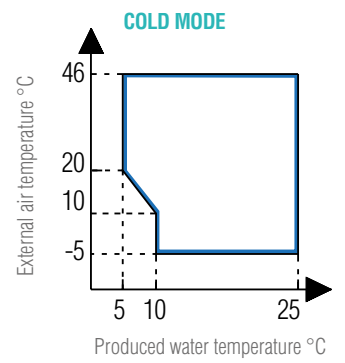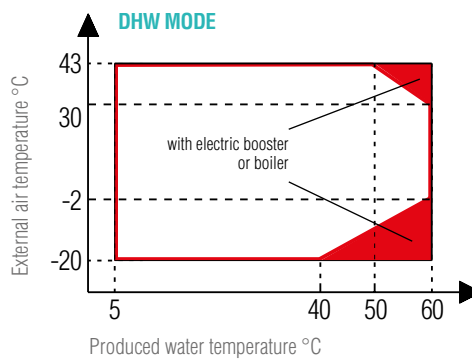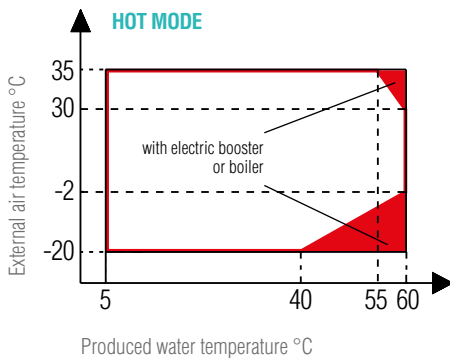




**NOTE ON DHW MODE:** Produced water temperature means the water temperature produced by the unit and not the DHW temperature available to the user which is a function of this parameter and of the surface of the coil of the DHW tank.

## OVERALL DIMENSIONS OF EXTERNAL UNIT

mod. 4 - 6


mod. 8

mod. 10 - 12 - 16 - 12T - 16T

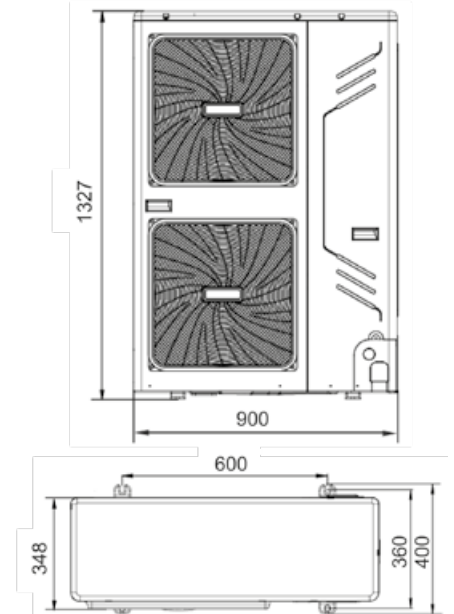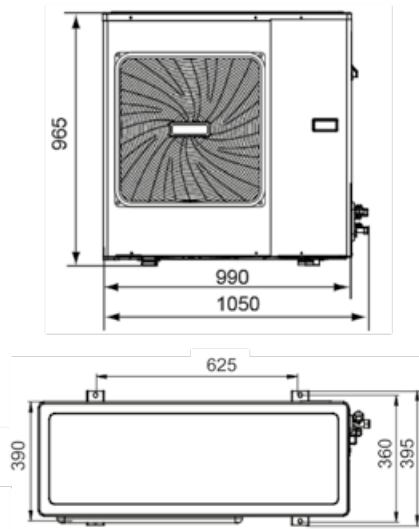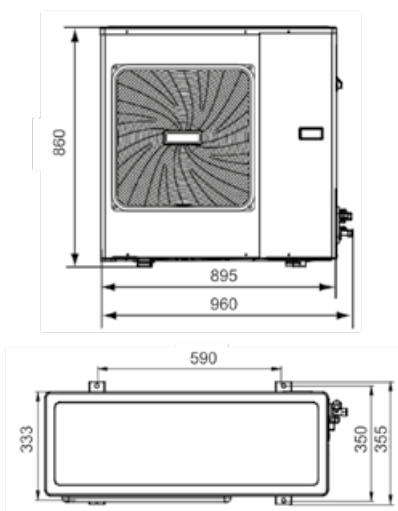


## MINIMUM OPERATING SPACES


### INTERNAL UNIT

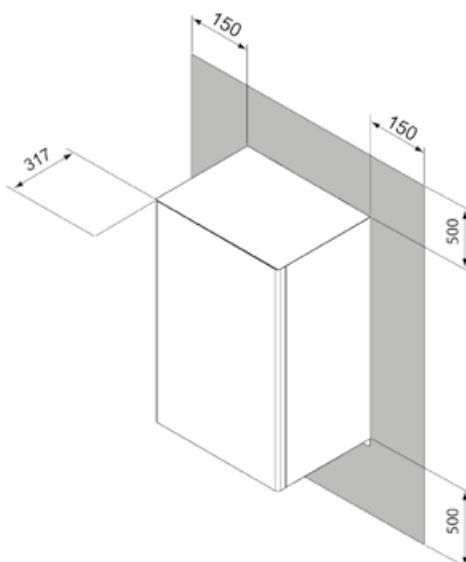

### EXTERNAL UNIT

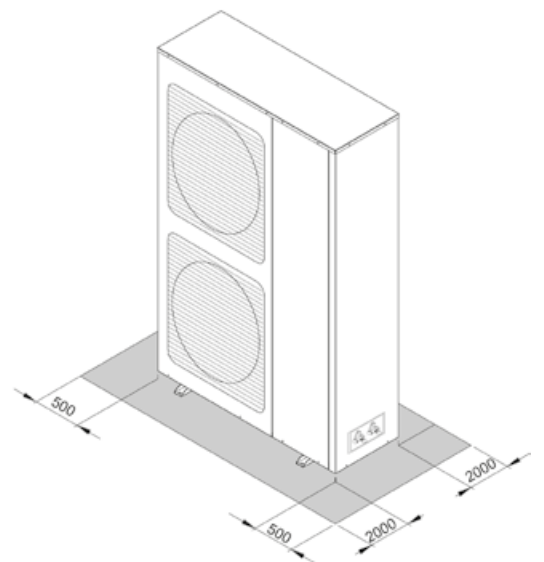

## OVERALL DIMENSIONS OF INTERNAL UNIT

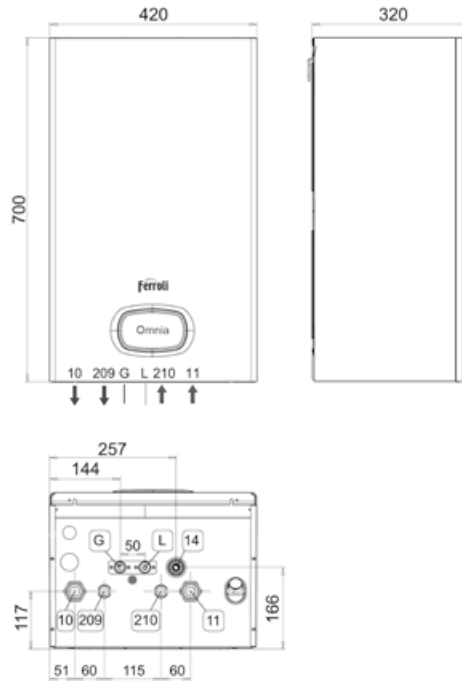


### > KEY


|    |                  |     |                            |
|----|------------------|-----|----------------------------|
| 10 | 1" system flow   | 209 | 3/4" storage tank delivery |
| 11 | 1" system return | 210 | Storage tank return 3/4"   |
| 14 | Safety valve     | L   | Liquid line                |
|    |                  | G   | Gas line                   |

## HYDRAULIC DIAGRAM

### INTERNAL UNIT WITH ELECTRICAL INTEGRATION (3 kW)

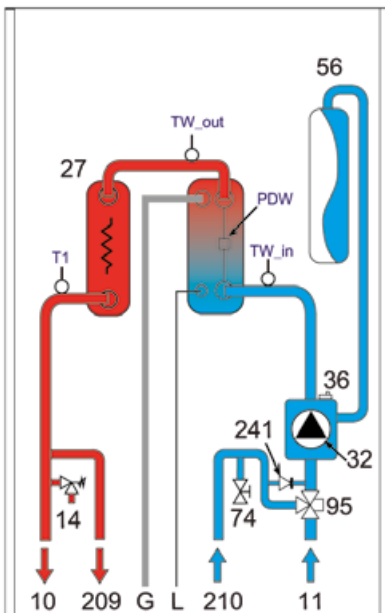

### INTERNAL UNIT WITHOUT ELECTRICAL INTEGRATION

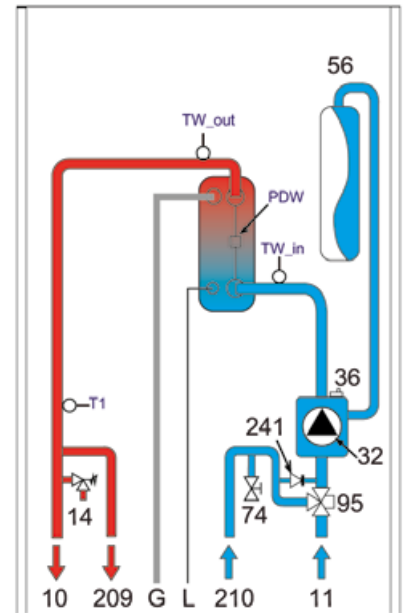

# RVL-I PLUS REVERSIBLE HEAT PUMPS FOR EXTERNAL INSTALLATION WITH DC INVERTER COMPRESSOR



## > GENERAL CHARACTERISTICS:

This series of air-water heat pumps meets the needs of winter and summer air-conditioning of small and medium power residential and commercial installations.

All the units are suitable for outdoor installation and being able to produce water up to 60°C they can be used in radiant systems, fan coils, radiators and for the indirect production of domestic hot water (DHW) via an external boiler.

The units are characterised by the use of a DC inverter compressor that modulates the supplied power and come complete with a hydronic kit composed of all the essential components for quick and safe installation. The units are characterised by high energy efficiency and contained sound levels allowing them to be used as a single generator for the plant or integrated with other energy sources such as additional electric heating elements or boiler.

All units are supplied as standard with a DHW water storage tank temperature probe (to be installed by the installer) and with an outdoor air temperature probe (already installed on the unit), to achieve climatic adjustment in heating and cooling.

All units are carefully built and individually tested in factory. Installation only requires electrical and hydraulic connections.

## > COOLING CIRCUIT

This is contained inside the unit to facilitate maintenance operations, it is equipped with **COMPRESSOR** with twin rotary DC INVERTER motor to guarantee greater dynamic balancing and reduce vibrations. It is positioned on rubber antivibration supports and wrapped in a double layer of sound-absorbing material to reduce noise. The compressor is also equipped with oil casing heating element. The circuit is completed with **BRAZE-WELDED STAINLESS STEEL PLATE HEAT EXCHANGER** complete with antifrost heating element, **AXIAL FANS WITH BRUSHLESS DC MOTOR** complete with accident prevention safety grilles, finned coil made of copper tubes and aluminium fins.

All units are equipped with variable fan speed control which allows operation at low outdoor temperatures in cooling and high outdoor temperatures in heating.

## > HYDRAULIC CIRCUIT

contained inside the unit to facilitate maintenance operations, it is fitted as per standard with **LOW CONSUMPTION CIRCULATOR** with brushless DC motor, water flow switch, automatic air vent, water pressure gauge, expansion vessel, safety valve, Y water filter (installation by the installation technician). The plate heat exchanger and all the hydraulic circuit pipes are thermally insulated to prevent condensation and reduce heat loss.

## > ACCESSORIES

- **ELECTRIC BOOSTER** Suitable for indoor installation, it consists of a power electric resistor = 3kW (230V-1-50) inserted inside a painted metal sheet box and complete with electrical command and control panel.
- **RUBBER VIBRATION DAMPERS**
- **60-LIT HORIZONTAL INERTIAL TANK**

## > THE CONTROL SYSTEM

The general control system monitors all the functions of the inverter system and correct compressor operation. It also incorporates regulation algorithms with predefined climatic curves that can be selected by the customer, the management of a DHW circuit, the setting of time slots for noise reduction at night, alarm signalling, pump block prevention and integration with external heat generators. The user interface consists of a remote wired controller that manages:

- **HEATING AND COOLING SYSTEM** If the unit is running in hot or cold mode, it works by modulating the compressor frequency to maintain the temperature of the produced water at the established setpoint value.
- **DOMESTIC HOT WATER PRODUCTION (DHW)** The unit starts in hot mode to maintain the temperature of a DHW storage tank at the established setpoint value. A 3-way diverter valve (not supplied) and a temperature probe (probe supplied) are required to be inserted in a pit of the DHW tank.
- **ADDITIONAL ENERGY SOURCES** (boiler or electric heating element) These sources can be started in Integration or replacement of the heat pump during operation in heating or for DHW production and if the heat pump does not work.
- **DHW STORAGE TANK ELECTRIC HEATING ELEMENT** IT IS possible to manage an integrating electric heating element and for the antilegionella function
- **FAST DHW** This function can be started manually to prioritise DHW by bringing the DHW storage tank to the setpoint in the quickest possible amount of time.
- **ANTILEGIONELLA FUNCTION** Weekly anti-legionella cycles can be set. The heat pump must be integrated with DHW boiler or boiler electrical heating element.
- **SILENCED MODE** When on, according to a programmed schedule, it reduces the maximum frequency of the compressor and the fan speed, to reduce the noise generated and the power absorbed by the unit.
- **ON/OFF** with an external contact. The unit can be switched on and off by an external contact.
- **HOT/COLD** with external contacts. The unit can be started and stopped in cold or hot mode by 2 external contacts (ex the thermostat for the zone that manages the request for hot and cold / remote switch).
- **ECO/COMFORT** Possibility of defining time slots in hot and cold and relative setpoints for ECO and COMFORT modes
- **WEEKLY SCHEDULE PROGRAMMING** this makes it possible to set a different schedule for each day of the week defining the operating mode for each time slot (COLD/HOT/DHW) and the work setpoint.
- **ANTIFROST PROTECTION.** Guaranteed down to -20°C outdoor air temperature thanks to the heat pump itself working in hot mode, to the electric antifrost heating element (as per standard) and the electric booster (if installed).

CONTROL THROUGH CLIMA CONTROL DISPLAY (REM CC)  
SUPPLIED AS PER STANDARD



## TECHNICAL DATA

| GENERAL DATA  |                 |                               | 5   | 7   | 9   | 12  | 12T      | 14T | 16T      |     |     |     |     |     |     |
|---|-----------------|-------------------------------|-----|-----|-----|-----|----------|-----|----------|-----|-----|-----|-----|-----|-----|
| ERP class in heating / Seasonal efficiency medium temperature (produced water 55°C) | (Class G - A++) | A++                           | 126 | A++ | 126 | A++ | 127      | A++ | 129      | A++ | 131 | A++ | 128 | A++ | 126 |
| ERP class in heating / Seasonal efficiency low temperature (produced water 35°C)    | (Class G - A++) | A++                           | 176 | A++ | 178 | A++ | 163      | A++ | 166      | A++ | 175 | A++ | 168 | A++ | 164 |
| Electric power supply   | V-ph-Hz         | 230-1-50                      |     |     |     |     | 400-3-50 |     | 400-3-50 |     |     |     |     |     |     |
| Type of compressor  | -               | Twin Rotary DC                |     |     |     |     |          |     |          |     |     |     |     |     |     |
| No. of compressors / No. of cooling circuits  | No.             | 1/1                           |     |     |     |     |          |     |          |     |     |     |     |     |     |
| Type of exchanger system side   | -               | brazed stainless steel plates |     |     |     |     |          |     |          |     |     |     |     |     |     |
| Type of exchanger source side   | -               | finned coil                   |     |     |     |     |          |     |          |     |     |     |     |     |     |
| Type of fans  | -               | DC axial                      |     |     |     |     |          |     |          |     |     |     |     |     |     |
| No. of fans   | No.             | 1                             |     |     |     |     | 2        |     |          |     |     |     |     |     |     |
| Expansion vessel volume   | l               | 2                             |     |     |     |     | 5        |     |          |     |     |     |     |     |     |
| Safety valve calibration  | bar             | 3                             |     |     |     |     | 3        |     |          |     |     |     |     |     |     |
| Connections   | "               | 1"                            |     |     |     |     | 1-1/4"   |     |          |     |     |     |     |     |     |
| Minimum system water content  | l               | 20                            |     |     |     |     | 20       |     |          |     |     |     |     |     |     |
| Minimum coil surf. for any DHW storage tank   | m <sup>2</sup>  | 1.4                           |     |     |     |     | 1.7      |     |          |     |     |     |     |     |     |
| Type of coolant   | type            | R410A                         |     |     |     |     | R410A    |     |          |     |     |     |     |     |     |
| Coolant load  | kg              | 2.40                          |     |     |     |     | 3.60     |     |          |     |     |     |     |     |     |
| Type of control   | -               | with remote wire              |     |     |     |     |          |     |          |     |     |     |     |     |     |
| SWL - Sound power level*  | dB(A)           | 61                            | 65  | 68  | 70  | 70  | 71       | 72  |          |     |     |     |     |     |     |
| SPL - Sound pressure level at 1 metre**   | dB(A)           | 46                            | 50  | 53  | 55  | 55  | 56       | 57  |          |     |     |     |     |     |     |
| Maximum absorbed current  | A               | 16                            | 16  | 20  | 32  | 16  | 16       | 16  |          |     |     |     |     |     |     |

\* SWL = Sound power levels, referring to  $1 \times 10^{-12}$  W with the unit operating in **A7W35** conditions = source : air in 7°C D.B. 6°C W.B. / system : water in 30°C out 35°C. The Total sound power level in dB(A) is measured in accordance with standard ISO 9614. The Total Sound Power in dB(A) which is therefore the only binding sound data.

\*\* SPL = Sound pressure levels, referring to  $2 \times 10^{-5}$  Pa. The sound pressure levels are values calculated from the sound power level (SWL) by applying the relations of ISO-3744.

| PERFORMANCE DATA |                  |     |         | 5               | 7               | 9               | 12              | 12T             | 14T             | 16T             |
|------------------|------------------|-----|---------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| <b>A7W35</b>     | Heat output      | W   | nom     | 4600            | 6600            | 8600            | 12170           | 12370           | 14100           | 16300           |
|                  |                  | W   | min-max | 1341-5800       | 1909-7574       | 2507-9500       | 3529-12657      | 3606-14651      | 4110-16700      | 4751-19306      |
|                  | Absorbed power   | W   | nom     | 970             | 1460            | 2000            | 2730            | 2760            | 3260            | 3880            |
|                  |                  | W   | min-max | 283-1280        | 420-1957        | 580-2561        | 792-3000        | 799-3876        | 944-4578        | 1124-5449       |
|                  | COP              | W/W |         | 4.72            | 4.52            | 4.3             | 4.46            | 4.48            | 4.33            | 4.20            |
| Water flow rate  | l/h              |     | 791     | 1135            | 1474            | 2093            | 2128            | 2425            | 2804            |                 |
| <b>A7W45</b>     | Heat output      | W   | nom     | 4700            | 6700            | 9200            | 12580           | 12020           | 14100           | 16060           |
|                  |                  | W   | min-max | 1370-5500       | 1953-7700       | 2682-9200       | 3663-13321      | 3504-12958      | 4110-15200      | 4681-17313      |
|                  | Absorbed power   | W   | nom     | 1440            | 2055            | 2640            | 3860            | 3720            | 4460            | 5230            |
|                  |                  | W   | min-max | 417-1833        | 595-2628        | 764-2636        | 1118-4451       | 1078-4371       | 1293-5241       | 1516-6146       |
|                  | COP              | W/W |         | 3.27            | 3.26            | 3.49            | 3.26            | 3.23            | 3.16            | 3.07            |
| Water flow rate  | l/h              |     | 808     | 1152            | 1577            | 2164            | 2067            | 2425            | 2762            |                 |
| <b>A35W18</b>    | Cooling capacity | W   | nom     | 4550            | 6450            | 8350            | 12190           | 12640           | 14000           | 15100           |
|                  |                  | W   | min-max | 1320-4921       | 1872-7000       | 2423-9100       | 3538-12357      | 3668-13362      | 4063-14800      | 4382-15963      |
|                  | Absorbed power   | W   | nom     | 1000            | 1470            | 2100            | 2650            | 2750            | 3260            | 3780            |
|                  |                  | W   | min-max | 304-1158        | 445-1719        | 632-2364        | 805-2806        | 837-3038        | 992-3601        | 1150-4175       |
|                  | EER              | W/W |         | 4.55            | 4.39            | 3.97            | 4.6             | 4.6             | 4.29            | 4.00            |
| Water flow rate  | l/h              |     | 783     | 1109            | 1431            | 2097            | 2174            | 2408            | 2597            |                 |
| <b>A35W7</b>     | Cooling capacity | W   | nom     | 4600            | 6700            | 8100            | 12210           | 12580           | 13800           | 15260           |
|                  |                  | W   | min-max | 1479-5430       | 1947-7000       | 2351-8300       | 3544-12210      | 3654-12580      | 4005-13800      | 4432-15260      |
|                  | Absorbed power   | W   | nom     | 1560            | 2570            | 3520            | 4170            | 4320            | 5150            | 6410            |
|                  |                  | W   | min-max | 527-2011        | 773-2857        | 1058-3756       | 1270-4165       | 1313-4319       | 1565-5149       | 1948-6409       |
|                  | EER              | W/W |         | 2.95            | 2.61            | 2.3             | 2.93            | 2.91            | 2.68            | 2.38            |
| Water flow rate  | l/h              |     | 791     | 1152            | 1389            | 2100            | 2164            | 2374            | 2625            |                 |
| <b>CODE</b>      |                  |     |         | <b>2C09700F</b> | <b>2C09701F</b> | <b>2C09705F</b> | <b>2C09706F</b> | <b>2C09707F</b> | <b>2C09704F</b> | <b>2C09709F</b> |

The values refer to units without any optional features or accessories.

Data declared according to **EN 14511**:

**EER** (Energy Efficiency Ratio) = ratio of cooling capacity in relation to absorbed power

**COP** (Coefficient Of Performance) = ratio of heat output in relation to absorbed power

**A7W35** = source : air in 7°C D.B. 6°C W.B. / system : water in 30°C out 35°C

**A7W45** = source : air in 7°C D.B. 6°C W.B. / system : water in 40°C out 45°C

**A35W18** = source : air in 35°C D.B. / system : water in 23°C out 18°C


**A35W7** = source : air in 35°C D.B. / system : water in 12°C out 7°C

**NOTE:** Efficiency class calculated according to European regulation **811/2013**. The values refer to units without any optional features or accessories.

| ACCESSORIES     | DESCRIPTION   |
|-----------------|---|
| <b>2C0970AF</b> | 3kW 230-1-50 electric heating booster for internal installation |
| <b>2C0970BF</b> | System flow temperature sensor L=10000                          |
| <b>2C0970CF</b> | RVL-I PLUS rubber vibration damping kit                         |
| <b>2C0970DF</b> | KFI inertial tank 60 lt RVL-I PLUS                              |


## > FE1S - FULL ELECTRIC EXAMPLE DIAGRAM OF SYSTEM

Hydronic single-piece reversible inverter heat pump for heating, cooling and DHW production. Heating and DHW can be integrated with dedicated electrical heating elements. The solar thermal contributes to the integration of the DHW, through dedicated electronics. The production of cooling/heating through air terminals or the presence of an inadequate minimum volume of system water requires the installation of an inertial storage tank.

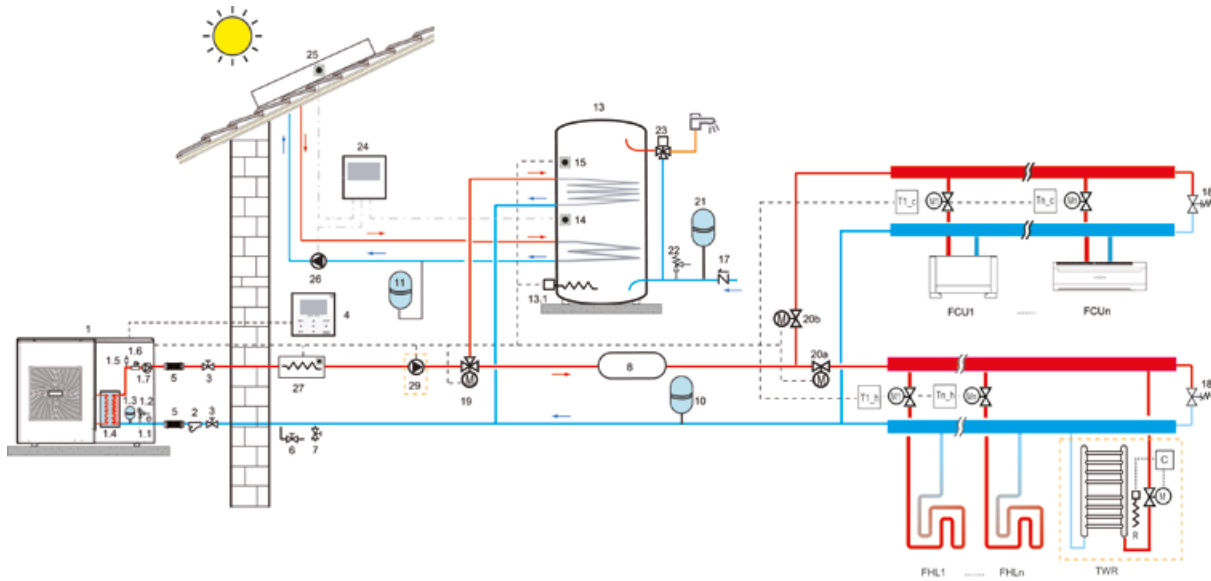

## > FE2S - FULL ELECTRIC EXAMPLE DIAGRAM OF SYSTEM

Hydronic single-piece reversible inverter heat pump for heating and cooling production. DHW production is managed by a water heater in heat pump that can be integrated with electric and solar thermal resistance, through dedicated electronics. The heating can be integrated via electrical resistances. The production of cooling/heating through air terminals or the presence of an inadequate minimum volume of system water requires the installation of an inertial storage tank.

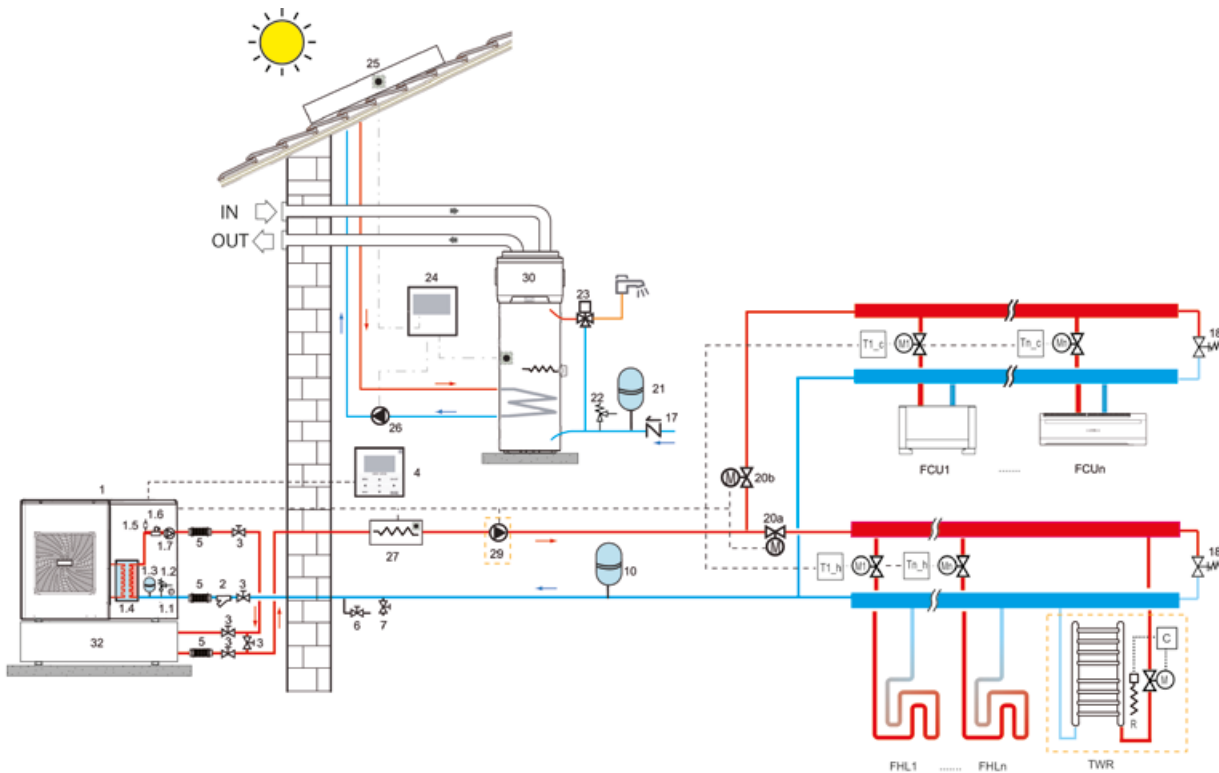

## > KEY

1 Heat pump 1.1 Water pressure gauge 1.2 Water safety valve 1.3 Expansion vessel 1.4 Plate heat exchanger (complete with electric antifrost heater) 1.5 Air vent 1.6 Flow switch 1.7 Internal unit pump (P<sub>i</sub>) 2 Y water filter (supplied, installed by the installer) 3 Tap (not supplied) 4 Remote wired controller (supplied as standard with heat pump) 5 Vibration damping joint (not supplied) 6 Water drain (not supplied) 7 Water filling (not supplied) 8 Inertial tank (not supplied): required if air terminals are used for cooling or if the system water content (excluding heat pump water content) is less than 20 litres 10 Expansion vessel (not supplied) 11 Solar expansion vessel 12 Hydraulic separator and booster pump (not supplied), to evaluate possible installation requirements in relation to plant pressure losses 13 DHW tank, minimum heat pump exchange surface (1.4 m<sup>2</sup> for mod. 5-7, 1.7 m<sup>2</sup> for mod. 10-14-14T) 13.1 Electric DHW storage tank heating element (not supplied) 14 T5 temperature probe (supplied, installation by the installer) 15 Storage tank temperature probe (available as boiler accessory) 17 Non-return valve (not supplied) 18 Bypass valve (not supplied) 19 SV1 3-way valve (not supplied) 20a Two-way valve (not supplied), controlled by SV2 - 20b Two-way valve (not supplied), commanded by SV2 in denied logic 21 DHW expansion vessel (not supplied) 22 DHW safety valve (not supplied) 23 Thermostatic mixing valve (not supplied) 24 Solar system Control unit with relative probes (not supplied) 25 Solar panel (not supplied) 26 Solar system pump (not supplied) 27 Electric booster (available as accessory) 28 Temperature probe T1B (available as an accessory to the heat pump) 29 External unit pump (P<sub>e</sub>), (not supplied), to be evaluated for possible installation based on system load losses, managed by THE heat pump 30 Heat pump water heater for floor standing installation 31 Heat pump water heater for hanging installation 32 60-litre inertial tank (available as an accessory): required if you use air terminals for cooling or if the water content of the system (except water pump content heat) is less than 20 litres T1\_c - Tn\_c Cold request room thermostat (not supplied) T1\_h - Tn\_h Hot request room thermostat (not supplied) FCU 1 ... n Air terminal: can be used for cooling only with radiant floor cooling or heating or for cooling and heating without radiant floor FHL 1 ... n Radiant floor heating only in zones TWR Bathroom integration towel warmer: if connected to the heating system heating must be integrated with an electric heating element (R) activated by the control (C) which simultaneously closes the valve (M); if not connected to the system, heating is provided only by the electric heating element (R) activated by the command (C) AHS Boiler with heating and domestic hot water integration (with antilegionella management in the heating-only versions) - - - - - electrical connections to heat pump - - - - - electrical connections to the solar plant management control unit - - - - - connection to the boiler of the DHW storage tank temperature probe (not supplied)

## > FE1S - FULL ELECTRIC SYSTEM EXAMPLE TABLE

| COMPONENTS                                       | CODE            | CONFIGURATIONS |              |              |               |                |                |                |
|--|-----------------|----------------|--------------|--------------|---------------|----------------|----------------|----------------|
| <b>A - HEAT PUMP + ACCESSORIES</b>               |                 | <b>5</b>       | <b>7</b>     | <b>9</b>     | <b>12</b>     | <b>12T</b>     | <b>14T</b>     | <b>16T</b>     |
| RVL I PLUS 5                                     | <b>2C09700F</b> | x              |              |              |               |                |                |                |
| RVL I PLUS 7                                     | <b>2C09701F</b> |                | x            |              |               |                |                |                |
| RVL I PLUS 9                                     | <b>2C09705F</b> |                |              | x            |               |                |                |                |
| RVL I PLUS 12                                    | <b>2C09706F</b> |                |              |              | x             |                |                |                |
| RVL I PLUS 12 T                                  | <b>2C09707F</b> |                |              |              |               | x              |                |                |
| RVL I PLUS 14 T                                  | <b>2C09704F</b> |                |              |              |               |                | x              |                |
| RVL I PLUS 16 T                                  | <b>2C09709F</b> |                |              |              |               |                |                | x              |
| VIBRATION DAMPERS                                | <b>2C0970CF</b> | x              | x            | x            | x             | x              | x              | x              |
| 3 KW HEATING ELECTRIC BOOSTER                    | <b>2C0970AF</b> | (0)            | (0)          | (0)          | (0)           | (0)            | (0)            | (0)            |
| INERTIAL TANK (1)                                | NOT PROVIDED    | (1)            | (1)          | (1)          | (1)           | (1)            | (1)            | (1)            |
| 3-WAY DIVERTER VALVE (4)                         | NOT SUPPLIED    | (4)            | (4)          | (4)          | (4)           | (4)            | (4)            | (4)            |
| <b>B - DHW PRODUCTION WITHOUT SOLAR THERMAL</b>  |                 | <b>5FE1</b>    | <b>7FE1</b>  | <b>9FE1</b>  | <b>12FE1</b>  | <b>12TFE1</b>  | <b>14TFE1</b>  | <b>16TFE1</b>  |
| ECOUNIT 200 - 1C                                 | <b>GRZ4110A</b> | (5)            | (5)          | nd           | nd            | nd             | nd             | nd             |
| ECOUNIT 300 - 1C                                 | <b>GRZ6310A</b> | x              | x            | nd           | nd            | nd             | nd             | nd             |
| ECOUNIT 400 - 1C                                 | <b>GRZ7410A</b> | (5)            | (5)          | (5)          | (5)           | (5)            | (5)            | (5)            |
| ECOUNIT 500 - 1C                                 | <b>GRZ8410A</b> | (5)            | (5)          | x            | x             | x              | x              | x              |
| THERMOSTATIC MIXER KIT                           | <b>013002X0</b> | x              | x            | x            | x             | x              | x              | x              |
| <b>C - DHW PRODUCTION WITH SOLAR THERMAL (3)</b> |                 | <b>5FE1S</b>   | <b>7FE1S</b> | <b>9FE1S</b> | <b>12FE1S</b> | <b>12TFE1S</b> | <b>14TFE1S</b> | <b>16TFE1S</b> |
| ECOGEO H-2 SP 350                                | <b>20Z14980</b> | x              | x            | x            | x             | x              | x              | x              |
| ECOGEO H-2 SP 500                                | <b>20Z14990</b> | (5)            | (5)          | (5)          | (5)           | (5)            | (5)            | (5)            |
| THERMOSTATIC MIXER KIT                           | <b>013002X0</b> | x              | x            | x            | x             | x              | x              | x              |

## > FE2S - FULL ELECTRIC SYSTEM EXAMPLE TABLE


| COMPONENTS                                       | CODE            | CONFIGURATIONS |              |              |               |               |                |                |
|--|-----------------|----------------|--------------|--------------|---------------|---------------|----------------|----------------|
| <b>A - HEAT PUMP + ACCESSORIES</b>               |                 | <b>5</b>       | <b>7</b>     | <b>9</b>     | <b>12</b>     | <b>12T</b>    | <b>14T</b>     | <b>16T</b>     |
| RVL I PLUS 5                                     | <b>2C09700F</b> | x              |              |              |               |               |                |                |
| RVL I PLUS 7                                     | <b>2C09701F</b> |                | x            |              |               |               |                |                |
| RVL I PLUS 9                                     | <b>2C09705F</b> |                |              | x            |               |               |                |                |
| RVL I PLUS 12                                    | <b>2C09706F</b> |                |              |              | x             |               |                |                |
| RVL I PLUS 12 T                                  | <b>2C09707F</b> |                |              |              |               | x             |                |                |
| RVL I PLUS 14 T                                  | <b>2C09704F</b> |                |              |              |               |               | x              |                |
| RVL I PLUS 16 T                                  | <b>2C09709F</b> |                |              |              |               |               |                | x              |
| VIBRATION DAMPERS                                | <b>2C0970CF</b> | x              | x            | x            | x             | x             | x              | x              |
| 3 KW HEATING ELECTRIC BOOSTER                    | <b>2C0970AF</b> | (0)            | (0)          | (0)          | (0)           | (0)           | (0)            | (0)            |
| INERTIAL TANK 60 L (1)                           | <b>2C0970DF</b> | (1)            | (1)          | (1)          | (1)           | (1)           | (1)            | (1)            |
| <b>B - DHW PRODUCTION WITHOUT SOLAR THERMAL</b>  |                 | <b>5FE2</b>    | <b>7FE2</b>  | <b>9FE2</b>  | <b>12FE2</b>  | <b>12TFE2</b> | <b>14TFE2</b>  | <b>16TFE2</b>  |
| AQUA1 PLUS 90 HT                                 | <b>2C0B600F</b> | (5)            | (5)          | (5)          | (5)           | (5)           | (5)            | (5)            |
| AQUA1 PLUS 160 HT                                | <b>2C0B601F</b> | (5)            | (5)          | (5)          | (5)           | (5)           | (5)            | (5)            |
| AQUA1 PLUS 200 HT                                | <b>2C0B602F</b> | x              | x            | x            | x             | x             | x              | x              |
| AQUA1 PLUS 260 HT                                | <b>2C0B603F</b> | (5)            | (5)          | (5)          | (5)           | (5)           | (5)            | (5)            |
| AQUA1 PLUS 200 LT                                | <b>2C0B604F</b> | (5)            | (5)          | (5)          | (5)           | (5)           | (5)            | (5)            |
| AQUA1 PLUS 260 LT                                | <b>2C0B605F</b> | (5)            | (5)          | (5)          | (5)           | (5)           | (5)            | (5)            |
| THERMOSTATIC MIXER KIT                           | <b>013002X0</b> | x              | x            | x            | x             | x             | x              | x              |
| <b>C - DHW PRODUCTION WITH SOLAR THERMAL (3)</b> |                 | <b>5FE2S</b>   | <b>7FE2S</b> | <b>9FE2S</b> | <b>12FE2S</b> | <b>10FE2S</b> | <b>14TFE2S</b> | <b>16TFE2S</b> |
| AQUA1 PLUS 200 LT (3)                            | <b>2C0B604F</b> | x              | x            | x            | x             | x             | x              | x              |
| AQUA1 PLUS 260 LT (3)                            | <b>2C0B605F</b> | (5)            | (5)          | (5)          | (5)           | (5)           | (5)            | (5)            |
| THERMOSTATIC MIXER KIT                           | <b>013002X0</b> | x              | x            | x            | x             | x             | x              | x              |

### NOTES

(0) Optional component - (1) Not required if the system water content is greater than 25 litres in both the heating circuit and, if applicable, in the cooling circuit. - (2) Not provided - guarantee greater exchange surface 1.4m<sup>2</sup> (RVL I 5/7) and greater 1.7m<sup>2</sup> (RVL I 10/14) - (3) For solar components, refer to the SOLAR THERMAL price list section, checking the correct combination of solar collectors and DHW storage. Solar Thermal not electronically managed by the HP. - (4) Use valves with a maximum switching time of less than 60 seconds. (5) Alternative solution - x proposed solution - nd Not combinable


## > HY1 - HYBRID EXAMPLE DIAGRAM OF SYSTEM

Hydronic single-piece reversible inverter heat pump for heating, cooling and DHW production. Heating and DHW can be integrated with a heating-only boiler. DHW is integrated with the boiler separately from the heat pump through a dedicated coil in the storage tank. The integration of heating with the boiler is managed by the electronics of the heat pump. The production of cooling/heating through air terminals or the presence of an inadequate minimum volume of system water requires the installation of an inertial storage tank.

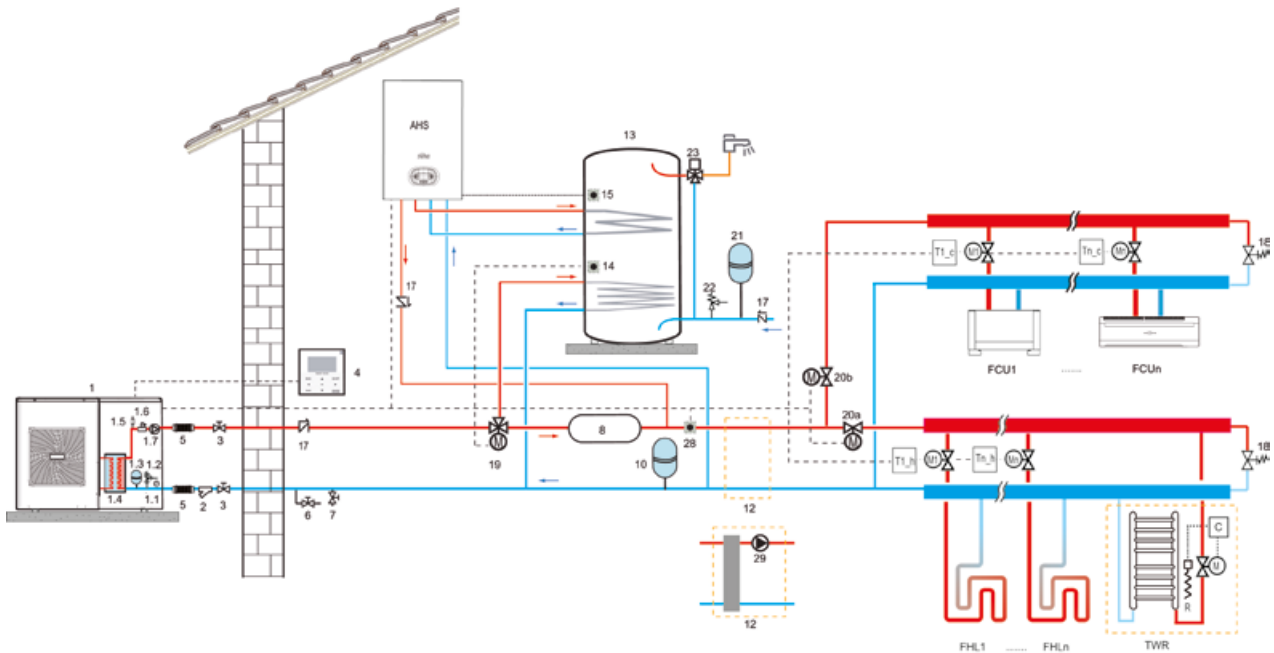

## > HY2 - HYBRID EXAMPLE DIAGRAM OF SYSTEM

Hydronic single-piece reversible inverter heat pump for heating and cooling production. The production of the DHW is managed by a wall-hung water heater in heat pump that can be integrated as needed through an instantaneous boiler with specific electronics. The integration of heating with the boiler is managed by the electronics of the heat pump. The production of cooling/heating through air terminals or the presence of an inadequate minimum volume of system water requires the installation of an inertial storage tank.

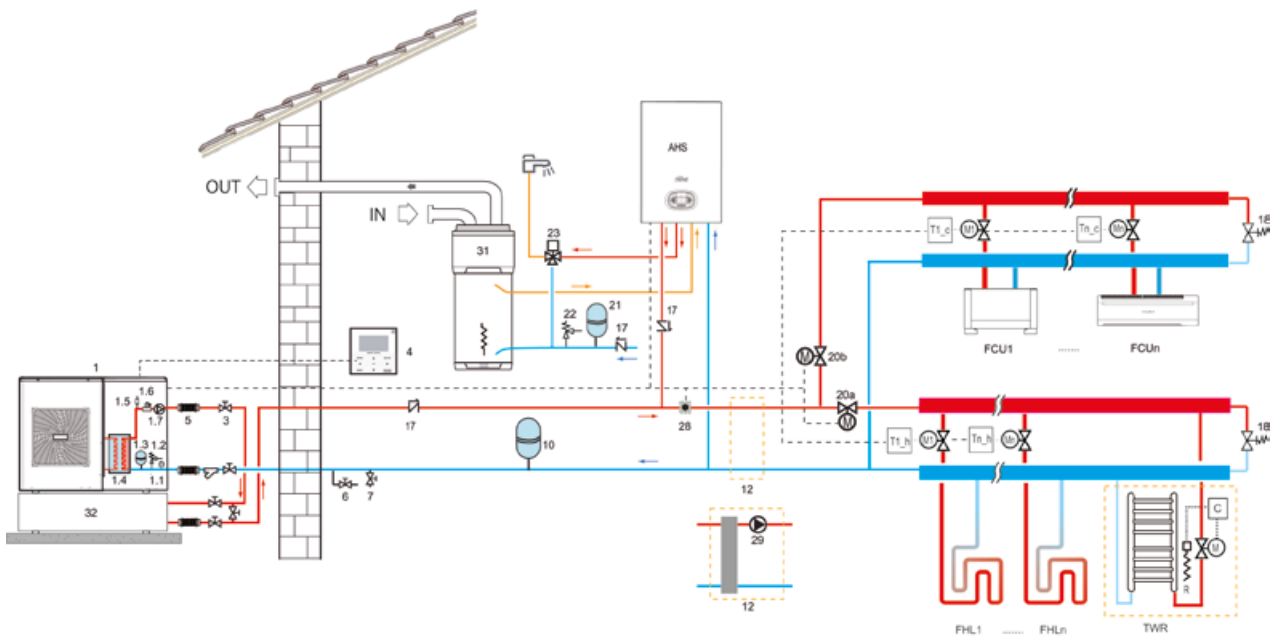

**> KEY** 1 Heat pump 1.1 Water pressure gauge 1.2 Water safety valve 1.3 Expansion vessel 1.4 Plate heat exchanger (complete with electric antifrost heater) 1.5 Air vent 1.6 Flow switch 1.7 Internal unit pump (P<sub>i</sub>) 2 Y water filter (supplied, installed by the installer) 3 Tap (not supplied) 4 Remote wired controller (supplied as standard with heat pump) 5 Vibration damping joint (not supplied) 6 Water drain (not supplied) 7 Water filling (not supplied) 8 Inertial tank (not supplied): required if air terminals are used for cooling or if the system water content (excluding heat pump water content) is less than 20 litres 10 Expansion vessel (not supplied) 11 Solar expansion vessel 12 Hydraulic separator and booster pump (not supplied), to evaluate possible installation requirements in relation to plant pressure losses 13 DHW tank, minimum heat pump exchange surface (1.4 m<sup>2</sup> for mod. 5-7, 1.7 m<sup>2</sup> for mod. 10-14-14T) 13.1 Electric DHW storage tank heating element (not supplied) 14 T5 temperature probe (supplied, installation by the installer) 15 Storage tank temperature probe (available as boiler accessory) 17 Non-return valve (not supplied) 18 Bypass valve (not supplied) 19 SV1 3-way valve (not supplied) 20a Two-way valve (not supplied), controlled by SV2 - 20b Two-way valve (not supplied), commanded by SV2 in denied logic 21 DHW expansion vessel (not supplied) 22 DHW safety valve (not supplied) 23 Thermostatic mixing valve (not supplied) 24 Solar system Control unit with relative probes (not supplied) 25 Solar panel (not supplied) 26 Solar system pump (not supplied) 27 Electric booster (available as accessory) 28 Temperature probe T1B (available as an accessory to the heat pump) 29 External unit pump (P<sub>o</sub>), (not supplied), to be evaluated for possible installation based on system load losses, managed by THE heat pump 30 Heat pump water heater for floor standing installation 31 Heat pump water heater for hanging installation 32 60-litre inertial tank (available as an accessory): required if you use air terminals for cooling or if the water content of the system (except water pump content heat) is less than 20 litres T1\_c - Tn\_c Cold request room thermostat (not supplied) T1\_h - Tn\_h Hot request room thermostat (not supplied) FCU 1 ... n Air terminal: can be used for cooling only with radiant floor cooling or heating or for cooling and heating without radiant floor FHL 1 ... n Radiant floor heating only in zones TWR Bathroom integration towel warmer: if connected to the heating system heating must be integrated with an electric heating element (R) activated by the control (C) which simultaneously closes the valve (M); if not connected to the system, heating is provided only by the electric heating element (R) activated by the command (C) AHS Boiler with heating and domestic hot water integration (with antilegionella management in the heating-only versions) - - - - - electrical connections to heat pump - - - - - electrical connections to the solar plant management control unit - - - - - connection to the boiler of the DHW storage tank temperature probe (not supplied)



## > HY1 - HYBRID SYSTEM EXAMPLE TABLE

| COMPONENTS                     | CODE            | CONFIGURATIONS |      |      |       |        |        |        |
|--------------------------------|-----------------|----------------|------|------|-------|--------|--------|--------|
| HEAT PUMP + ACCESSORIES        |                 | 5HY1           | 7HY1 | 9HY1 | 12HY1 | 12THY1 | 14THY1 | 16THY1 |
| RVL I PLUS 5                   | <b>2C09700F</b> | x              |      |      |       |        |        |        |
| RVL I PLUS 7                   | <b>2C09701F</b> |                | x    |      |       |        |        |        |
| RVL I PLUS 9                   | <b>2C09705F</b> |                |      | x    |       |        |        |        |
| RVL I PLUS 12                  | <b>2C09706F</b> |                |      |      | x     |        |        |        |
| RVL I PLUS 12 T                | <b>2C09707F</b> |                |      |      |       | x      |        |        |
| RVL I PLUS 14 T                | <b>2C09704F</b> |                |      |      |       |        | x      |        |
| RVL I PLUS 16 T                | <b>2C09709F</b> |                |      |      |       |        |        | x      |
| VIBRATION-DAMPING              | <b>2C0970CF</b> | x              | x    | x    | x     | x      | x      | x      |
| T1B SYSTEM FLOW TEMP. PROBE    | <b>2C0970BF</b> | x              | x    | x    | x     | x      | x      | x      |
| INERTIAL TANK (1)              | NOT PROVIDED    | (1)            | (1)  | (1)  | (1)   | (1)    | (1)    | (1)    |
| 3-WAY DIVERTER VALVE (4)       | NOT SUPPLIED    | (4)            | (4)  | (4)  | (4)   | (4)    | (4)    | (4)    |
| BOILER + ACCESSORIES           |                 |                |      |      |       |        |        |        |
| BLUEHELIX TECH RRT 24 H        | <b>0T3D2BWA</b> | x              | x    | x    | x     | x      | x      | x      |
| 5m STORAGE TANK PROBE KIT      | <b>043005X0</b> | x              | x    | x    | x     | x      | x      | x      |
| 80/80 TWIN PIPES DISCHARGE KIT | <b>041082X0</b> | x              | x    | x    | x     | x      | x      | x      |
| DHW PRODUCTION                 |                 |                |      |      |       |        |        |        |
| ECOGEO H-2 PC 350              | <b>20Z14A30</b> | x              | x    | x    | x     | x      | x      | x      |
| ECOGEO H-2 PC 500              | <b>20Z14A40</b> | (5)            | (5)  | (5)  | (5)   | (5)    | (5)    | (5)    |
| THERMOSTATIC MIXER KIT         | <b>013002X0</b> | x              | x    | x    | x     | x      | x      | x      |

## > HY2 - HYBRID SYSTEM EXAMPLE TABLE


| COMPONENTS                               | CODE            | CONFIGURATIONS |      |      |       |       |        |        |
|--|-----------------|----------------|------|------|-------|-------|--------|--------|
| HEAT PUMP + ACCESSORIES                  |                 | 5HY2           | 7HY2 | 9HY2 | 12HY2 | 12TY2 | 14THY2 | 16THY2 |
| RVL I PLUS 5                             | <b>2C09700F</b> | x              |      |      |       |       |        |        |
| RVL I PLUS 7                             | <b>2C09701F</b> |                | x    |      |       |       |        |        |
| RVL I PLUS 9                             | <b>2C09705F</b> |                |      | x    |       |       |        |        |
| RVL I PLUS 12                            | <b>2C09706F</b> |                |      |      | x     |       |        |        |
| RVL I PLUS 12 T                          | <b>2C09707F</b> |                |      |      |       | x     |        |        |
| RVL I PLUS 14 T                          | <b>2C09704F</b> |                |      |      |       |       | x      |        |
| RVL I PLUS 16 T                          | <b>2C09709F</b> |                |      |      |       |       |        | x      |
| VIBRATION DAMPERS                        | <b>2C0970CF</b> | x              | x    | x    | x     | x     | x      | x      |
| TEMP. SENSOR T1B SYSTEM FLOW             | <b>2C0970BF</b> | x              | x    | x    | x     | x     | x      | x      |
| INERTIAL TANK 60 L (1)                   | <b>2C0970DF</b> | (1)            | (1)  | (1)  | (1)   | (1)   | (1)    | (1)    |
| BOILER + ACCESSORIES                     |                 |                |      |      |       |       |        |        |
| BLUEHELIX PRO RRT 24 C                   | <b>0T3B2HWA</b> | x              | x    | x    | x     | x     | x      | x      |
| KIT FOR CONNECTION OF HYDRAULIC FITTINGS | <b>012043W0</b> | (0)            | (0)  | (0)  | (0)   | (0)   | (0)    | (0)    |
| 80/80 TWIN PIPES DISCHARGE KIT           | <b>041082X0</b> | x              | x    | x    | x     | x     | x      | x      |
| DHW PRODUCTION                           |                 |                |      |      |       |       |        |        |
| AQUA1 PLUS 90 HT                         | <b>2C0B600F</b> | x              | x    | x    | x     | x     | x      | x      |
| THERMOSTATIC MIXER KIT                   | <b>013002X0</b> | x              | x    | x    | x     | x     | x      | x      |

### NOTES

(0) Optional component - (1) Not required if the system water content is greater than 25 litres in both the heating circuit and, if applicable, in the cooling circuit. - (2) Not provided - guarantee greater exchange surface 1.4m<sup>2</sup> (RVL I 5/7) and greater 1.7m<sup>2</sup> (RVL I 10/14) - (3) For solar components, refer to the SOLAR THERMAL price list section, checking the correct combination of solar collectors and DHW storage. Solar Thermal not electronically managed by the HP. - (4) Use valves with a maximum switching time of less than 60 seconds. (5) Alternative solution - x proposed solution - nd Not combinable


## > HY3S - HYBRID EXAMPLE DIAGRAM OF SYSTEM

Hydronic single-piece reversible inverter heat pump for heating and cooling production. The production of the DHW is managed by a water heater in heat pump that can be integrated as needed through an instantaneous boiler with specific electronics and solar thermal, through dedicated electronics. The integration of heating with the boiler is managed by the electronics of the heat pump. The production of cooling/heating through air terminals or the presence of an inadequate minimum volume of system water requires the installation of an inertial storage tank.

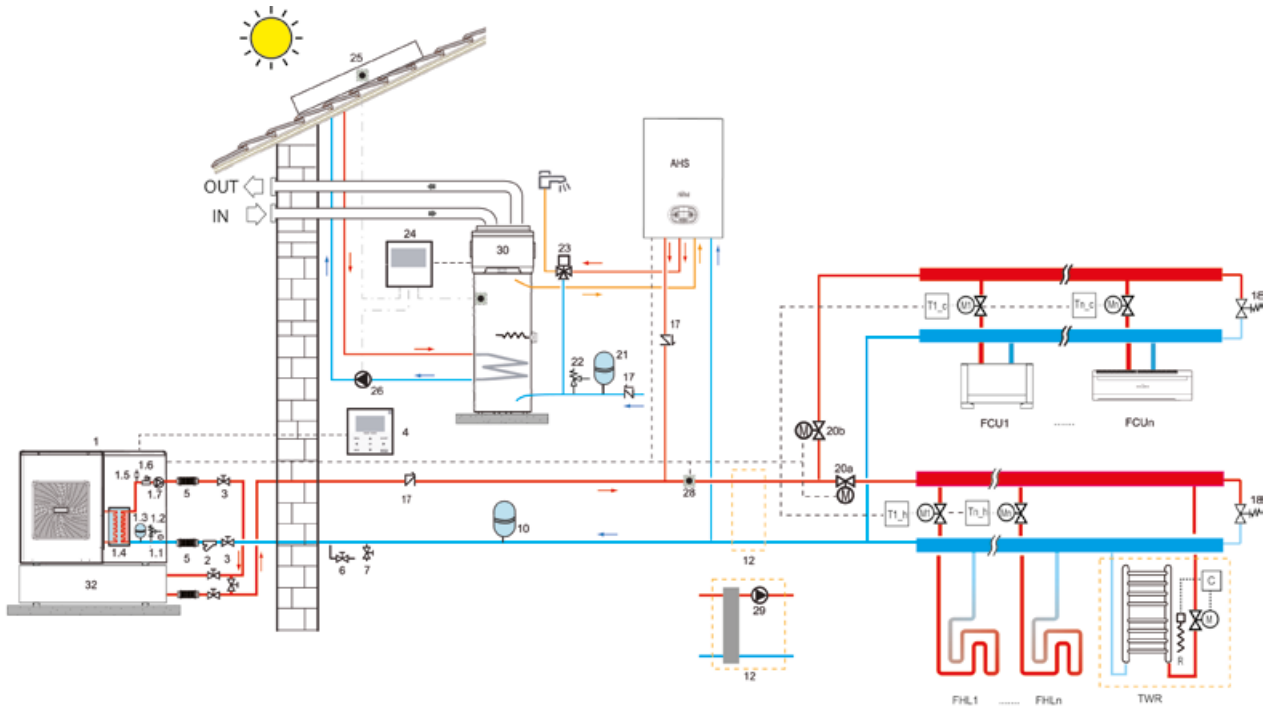

## > HY4S - HYBRID EXAMPLE DIAGRAM OF SYSTEM

Hydronic single-piece reversible inverter heat pump for heating and cooling production. DHW production is managed with solar thermal, through dedicated electronics and that can be integrated with a heating-only boiler with dedicated coil in the storage tank. The integration of heating with the boiler is managed by the electronics of the heat pump. The production of cooling/heating through air terminals or the presence of an inadequate minimum volume of system water requires the installation of an inertial storage tank.

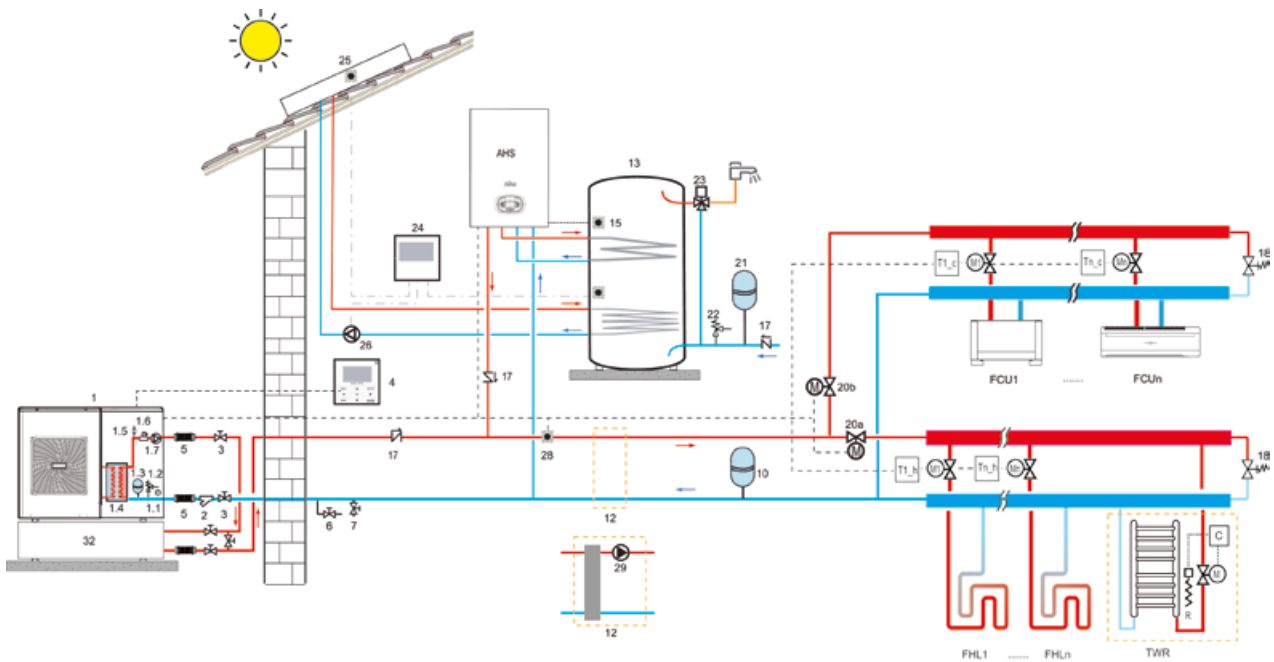

## > KEY

1 Heat pump 1.1 Water pressure gauge 1.2 Water safety valve 1.3 Expansion vessel 1.4 Plate heat exchanger (complete with electric antifrost heater) 1.5 Air vent 1.6 Flow switch 1.7 Internal unit pump (P<sub>i</sub>) 2 Y water filter (supplied, installed by the installer) 3 Tap (not supplied) 4 Remote wired controller (supplied as standard with heat pump) 5 Vibration damping joint (not supplied) 6 Water drain (not supplied) 7 Water filling (not supplied) 8 Inertial tank (not supplied): required if air terminals are used for cooling or if the system water content (excluding heat pump water content) is less than 20 litres 10 Expansion vessel (not supplied) 11 Solar expansion vessel 12 Hydraulic separator and booster pump (not supplied), to evaluate possible installation requirements in relation to plant pressure losses 13 DHW tank, minimum heat pump exchange surface (1.4 m<sup>2</sup> for mod. 5-7, 1.7 m<sup>2</sup> for mod. 10-14-14T) 13.1 Electric DHW storage tank heating element (not supplied) 14 T5 temperature probe (supplied, installation by the installer) 15 Storage tank temperature probe (available as boiler accessory) 17 Non-return valve (not supplied) 18 Bypass valve (not supplied) 19 SV1 3-way valve (not supplied) 20a Two-way valve (not supplied), controlled by SV2 - 20b Two-way valve (not supplied), commanded by SV2 in denied logic 21 DHW expansion vessel (not supplied) 22 DHW safety valve (not supplied) 23 Thermostatic mixing valve (not supplied) 24 Solar system Control unit with relative probes (not supplied) 25 Solar panel (not supplied) 26 Solar system pump (not supplied) 27 Electric booster (available as accessory) 28 Temperature probe T1B (available as an accessory to the heat pump) 29 External unit pump (P<sub>e</sub>), (not supplied), to be evaluated for possible installation based on system load losses, managed by THE heat pump 30 Heat pump water heater for floor standing installation 31 Heat pump water heater for hanging installation 32 60-litre inertial tank (available as an accessory): required if you use air terminals for cooling or if the water content of the system (except water pump content heat) is less than 20 litres T1\_c - Tn\_c Cold request room thermostat (not supplied) T1\_h - Tn\_h Hot request room thermostat (not supplied) FCU 1 ... n Air terminal: can be used for cooling only with radiant floor cooling or heating or for cooling and heating without radiant floor FHL 1 ... n Radiant floor heating only in zones TWR Bathroom integration towel warmer: if connected to the heating system heating must be integrated with an electric heating element (R) activated by the control (C) which simultaneously closes the valve (M); if not connected to the system, heating is provided only by the electric heating element (R) activated by the command (C) AHS Boiler with heating and domestic hot water integration (with antilegionella management in the heating-only versions) - - - - - electrical connections to heat pump - - - - - electrical connections to the solar plant management control unit - - - - - connection to the boiler of the DHW storage tank temperature probe (not supplied)

## > HY3S - HYBRID SYSTEM EXAMPLE TABLE

| COMPONENTS                                       | CODE            | CONFIGURATIONS |              |              |               |                |                |                |
|--|-----------------|----------------|--------------|--------------|---------------|----------------|----------------|----------------|
| <b>A - HEAT PUMP + ACCESSORIES</b>               |                 | <b>5</b>       | <b>7</b>     | <b>9</b>     | <b>12</b>     | <b>12T</b>     | <b>14T</b>     | <b>16T</b>     |
| RVL I PLUS 5                                     | <b>2C09700F</b> | x              |              |              |               |                |                |                |
| RVL I PLUS 7                                     | <b>2C09701F</b> |                | x            |              |               |                |                |                |
| RVL I PLUS 9                                     | <b>2C09705F</b> |                |              | x            |               |                |                |                |
| RVL I PLUS 12                                    | <b>2C09706F</b> |                |              |              | x             |                |                |                |
| RVL I PLUS 12 T                                  | <b>2C09707F</b> |                |              |              |               | x              |                |                |
| RVL I PLUS 14 T                                  | <b>2C09704F</b> |                |              |              |               |                | x              |                |
| RVL I PLUS 16 T                                  | <b>2C09709F</b> |                |              |              |               |                |                | x              |
| VIBRATION DAMPERS                                | <b>2C0970CF</b> | x              | x            | x            | x             | x              | x              | x              |
| TEMP. SENSOR T1B SYSTEM FLOW                     | <b>2C0970BF</b> | x              | x            | x            | x             | x              | x              | x              |
| INERTIAL TANK 60 L (1)                           | <b>2C0970DF</b> | (1)            | (1)          | (1)          | (1)           | (1)            | (1)            | (1)            |
| <b>B - BOILER + ACCESSORIES</b>                  |                 |                |              |              |               |                |                |                |
| BLUEHELIX TECH RRT 24 C                          | <b>0T3B2BWA</b> | x              | x            | x            | x             | x              | x              | x              |
| KIT FOR CONNECTION OF HYDRAULIC FITTINGS         | <b>012043W0</b> | (0)            | (0)          | (0)          | (0)           | (0)            | (0)            | (0)            |
| 80/80 TWIN PIPES DISCHARGE KIT                   | <b>041082X0</b> | x              | x            | x            | x             | x              | x              | x              |
| <b>C - DHW PRODUCTION WITHOUT SOLAR THERMAL</b>  |                 | <b>5HY3</b>    | <b>7HY3</b>  | <b>9HY3</b>  | <b>12HY3</b>  | <b>12THY3</b>  | <b>14THY3</b>  | <b>16THY3</b>  |
| AQUA1 PLUS 160 HT                                | <b>2C0B601F</b> | (5)            | (5)          | (5)          | (5)           | (5)            | (5)            | (5)            |
| AQUA1 PLUS 200 HT                                | <b>2C0B602F</b> | x              | x            | x            | x             | x              | x              | x              |
| AQUA1 PLUS 260 HT                                | <b>2C0B603F</b> | (5)            | (5)          | (5)          | (5)           | (5)            | (5)            | (5)            |
| AQUA1 PLUS 200 LT                                | <b>2C0B604F</b> | (5)            | (5)          | (5)          | (5)           | (5)            | (5)            | (5)            |
| AQUA1 PLUS 260 LT                                | <b>2C0B605F</b> | (5)            | (5)          | (5)          | (5)           | (5)            | (5)            | (5)            |
| THERMOSTATIC MIXER KIT                           | <b>013002X0</b> | x              | x            | x            | x             | x              | x              | x              |
| <b>D - DHW PRODUCTION WITH SOLAR THERMAL (3)</b> |                 | <b>5HY3S</b>   | <b>7HY3S</b> | <b>9HY3S</b> | <b>12HY3S</b> | <b>12THY3S</b> | <b>14THY3S</b> | <b>16THY3S</b> |
| AQUA1 PLUS 200 LT (3)                            | <b>2C0B604F</b> | x              | x            | x            | x             | x              | x              | x              |
| AQUA1 PLUS 260 LT (3)                            | <b>2C0B605F</b> | (5)            | (5)          | (5)          | (5)           | (5)            | (5)            | (5)            |
| THERMOSTATIC MIXER KIT                           | <b>013002X0</b> | x              | x            | x            | x             | x              | x              | x              |


## > HY4S - HYBRID SYSTEM EXAMPLE TABLE

| COMPONENTS                                   | CODE            | CONFIGURATIONS |              |              |               |                |                |                |
|--|-----------------|----------------|--------------|--------------|---------------|----------------|----------------|----------------|
| <b>HEAT PUMP + ACCESSORIES</b>               |                 | <b>5HY4S</b>   | <b>7HY4S</b> | <b>9HY4S</b> | <b>12HY4S</b> | <b>12THY4S</b> | <b>14THY4S</b> | <b>16THY4S</b> |
| RVL I PLUS 5                                 | <b>2C09700F</b> | x              |              |              |               |                |                |                |
| RVL I PLUS 7                                 | <b>2C09701F</b> |                | x            |              |               |                |                |                |
| RVL I PLUS 9                                 | <b>2C09705F</b> |                |              | x            |               |                |                |                |
| RVL I PLUS 12                                | <b>2C09706F</b> |                |              |              | x             |                |                |                |
| RVL I PLUS 12 T                              | <b>2C09707F</b> |                |              |              |               | x              |                |                |
| RVL I PLUS 14 T                              | <b>2C09704F</b> |                |              |              |               |                | x              |                |
| RVL I PLUS 16 T                              | <b>2C09709F</b> |                |              |              |               |                |                | x              |
| VIBRATION DAMPERS                            | <b>2C0970CF</b> | x              | x            | x            | x             | x              | x              | x              |
| TEMP. SENSOR T1B SYSTEM FLOW                 | <b>2C0970BF</b> | x              | x            | x            | x             | x              | x              | x              |
| INERTIAL TANK 60 L (1)                       | <b>2C0970DF</b> | (1)            | (1)          | (1)          | (1)           | (1)            | (1)            | (1)            |
| <b>BOILER + ACCESSORIES</b>                  |                 |                |              |              |               |                |                |                |
| BLUEHELIX TECH RRT 24 H                      | <b>0T3D2BWA</b> | x              | x            | x            | x             | x              | x              | x              |
| 5m STORAGE TANK PROBE KIT                    | <b>043005X0</b> | x              | x            | x            | x             | x              | x              | x              |
| 80/80 TWIN PIPES DISCHARGE KIT               | <b>041082X0</b> | x              | x            | x            | x             | x              | x              | x              |
| <b>DHW PRODUCTION WITH SOLAR THERMAL (3)</b> |                 |                |              |              |               |                |                |                |
| ECOUNIT 200 - 2C                             | <b>GRZ4120A</b> | x              | x            | (5)          | (5)           | (5)            | (5)            | (5)            |
| ECOUNIT 300 - 2C                             | <b>GRZ6320A</b> | (5)            | (5)          | x            | x             | x              | x              | x              |
| ECOUNIT 400 - 2C                             | <b>GRZ7420A</b> | (5)            | (5)          | (5)          | (5)           | (5)            | (5)            | (5)            |
| ECOUNIT 500 - 2C                             | <b>GRZ8420A</b> | (5)            | (5)          | (5)          | (5)           | (5)            | (5)            | (5)            |
| THERMOSTATIC MIXER KIT                       | <b>013002X0</b> | x              | x            | x            | x             | x              | x              | x              |

**NOTES:** (0) Optional component - (1) Not required if the system water content is greater than 25 litres in both the heating circuit and, if applicable, in the cooling circuit. - (2) Not provided - guarantee greater exchange surface 1.4m<sup>2</sup> (RVL I 5/7) and greater 1.7m<sup>2</sup> (RVL I 10/14) - (3) For solar components, refer to the SOLAR THERMAL price list section, checking the correct combination of solar collectors and DHW storage. Solar Thermal not electronically managed by the HP. - (4) Use valves with a maximum switching time of less than 60 seconds. (5) Alternative solution - x proposed solution - nd Not combinable


## > HY5S - HYBRID EXAMPLE DIAGRAM OF SYSTEM

Hydronic single-piece reversible inverter heat pump for heating, cooling and DHW production. Heating and DHW can be integrated with an instantaneous boiler. The solar thermal contributes to the integration of the DHW, through dedicated electronics. The integration of heating with the boiler is managed by the electronics of the heat pump. The production of cooling/heating through air terminals or the presence of an inadequate minimum volume of system water requires the installation of an inertial storage tank.

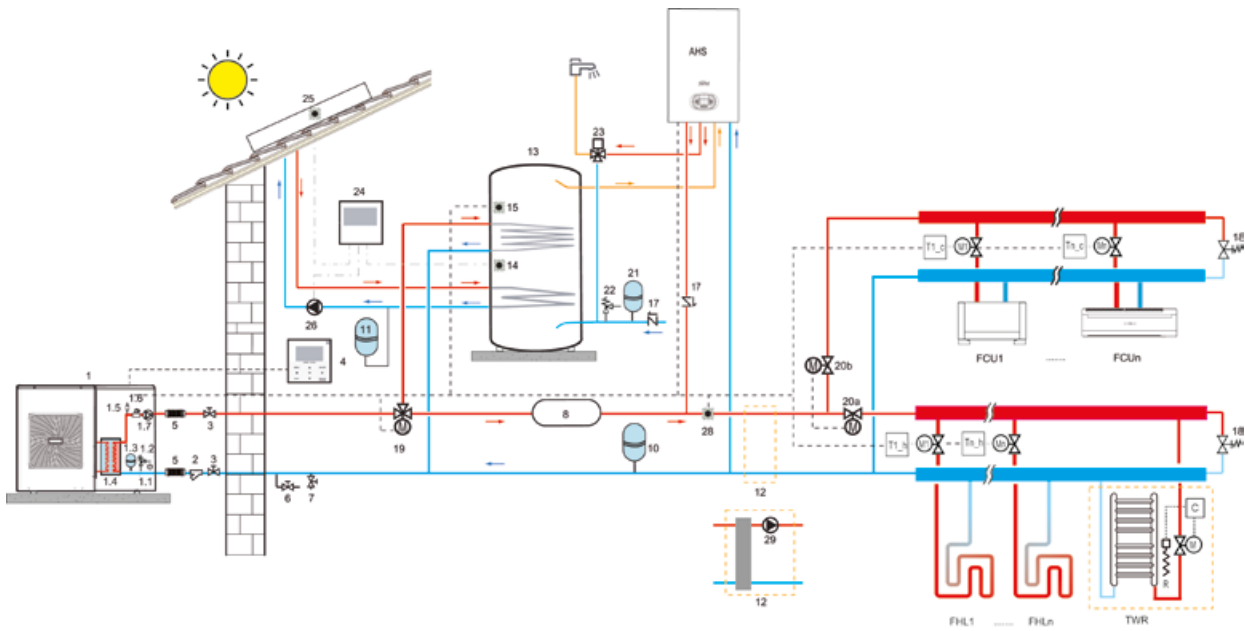

## > HY6 - HYBRID EXAMPLE DIAGRAM OF SYSTEM

Hydronic single-piece reversible inverter heat pump for heating and cooling production. The production of the DHW is managed by a water heater in heat pump that can be integrated as needed through a heating-only boiler. The integration of heating with the boiler is managed by the electronics of the heat pump. The production of cooling/heating through air terminals or the presence of an inadequate minimum volume of system water requires the installation of an inertial storage tank.

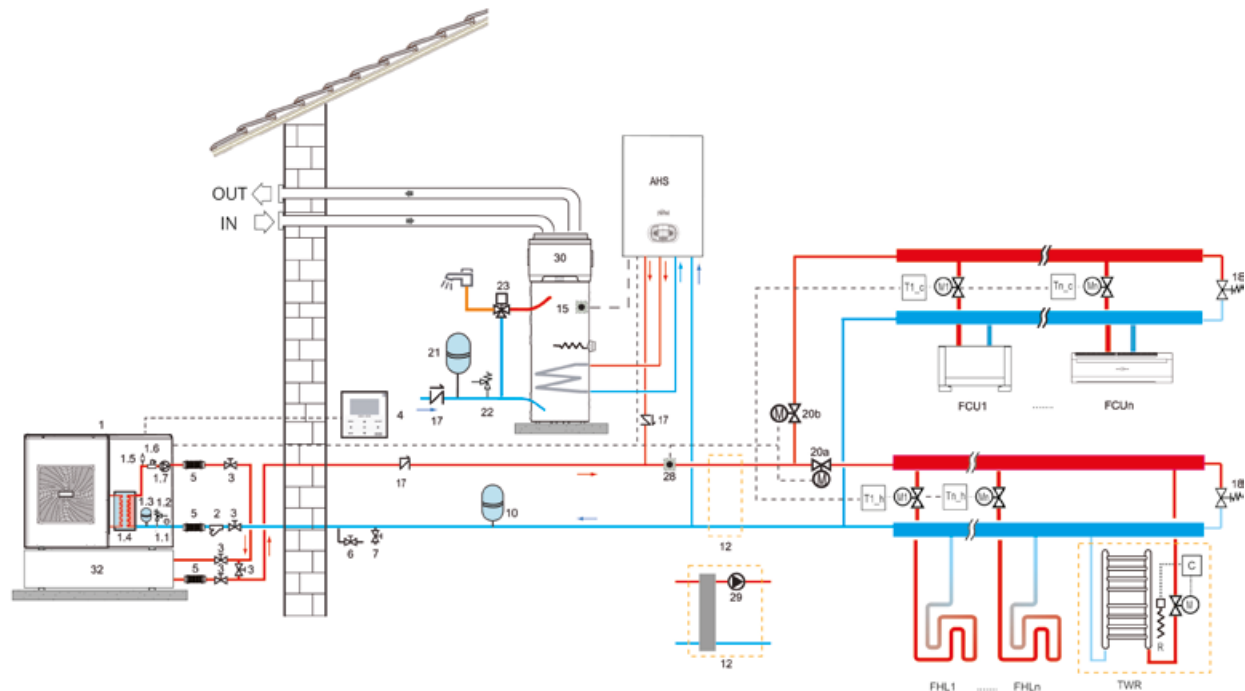

## > KEY

1 Heat pump 1.1 Water pressure gauge 1.2 Water safety valve 1.3 Expansion vessel 1.4 Plate heat exchanger (complete with electric antifrost heater) 1.5 Air vent 1.6 Flow switch 1.7 Internal unit pump (P<sub>i</sub>) 2 Y water filter (supplied, installed by the installer) 3 Tap (not supplied) 4 Remote wired controller (supplied as standard with heat pump) 5 Vibration damping joint (not supplied) 6 Water drain (not supplied) 7 Water filling (not supplied) 8 Inertial tank (not supplied): required if air terminals are used for cooling or if the system water content (excluding heat pump water content) is less than 20 litres 10 Expansion vessel (not supplied) 11 Solar expansion vessel 12 Hydraulic separator and booster pump (not supplied), to evaluate possible installation requirements in relation to plant pressure losses 13 DHW tank, minimum heat pump exchange surface (1.4 m<sup>2</sup> for mod. 5-7, 1.7 m<sup>2</sup> for mod. 10-14-14T) 13.1 Electric DHW storage tank heating element (not supplied) 14 T5 temperature probe (supplied, installation by the installer) 15 Storage tank temperature probe (available as boiler accessory) 17 Non-return valve (not supplied) 18 Bypass valve (not supplied) 19 SV1 3-way valve (not supplied) 20a Two-way valve (not supplied), controlled by SV2 - 20b Two-way valve (not supplied), commanded by SV2 in denied logic 21 DHW expansion vessel (not supplied) 22 DHW safety valve (not supplied) 23 Thermostatic mixing valve (not supplied) 24 Solar system Control unit with relative probes (not supplied) 25 Solar panel (not supplied) 26 Solar system pump (not supplied) 27 Electric booster (available as accessory) 28 Temperature probe T1B (available as an accessory to the heat pump) 29 External unit pump (P<sub>e</sub>), (not supplied), to be evaluated for possible installation based on system load losses, managed by THE heat pump 30 Heat pump water heater for floor standing installation 31 Heat pump water heater for hanging installation 32 60-litre inertial tank (available as an accessory): required if you use air terminals for cooling or if the water content of the system (except water pump content heat) is less than 20 litres T1\_c - Tn\_c Cold request room thermostat (not supplied) T1\_h - Tn\_h Hot request room thermostat (not supplied) FCU 1 ... n Air terminal: can be used for cooling only with radiant floor cooling or heating or for cooling and heating without radiant floor FHL 1 ... n Radiant floor heating only in zones TWR Bathroom integration towel warmer: if connected to the heating system heating must be integrated with an electric heating element (R) activated by the control (C) which simultaneously closes the valve (M); if not connected to the system, heating is provided only by the electric heating element (R) activated by the command (C) AHS Boiler with heating and domestic hot water integration (with antilegionella management in the heating-only versions) - - - - - electrical connections to heat pump - - - - - electrical connections to the solar plant management control unit - - - - - connection to the boiler of the DHW storage tank temperature probe (not supplied)

## > HY5S - HYBRID SYSTEM EXAMPLE TABLE

| COMPONENTS                                       | CODE            | CONFIGURATIONS |              |              |               |                |                 |                 |
|--|-----------------|----------------|--------------|--------------|---------------|----------------|-----------------|-----------------|
|  |                 | 5              | 7            | 9            | 12            | 12T            | 14T             | 16T             |
| <b>A - HEAT PUMP + ACCESSORIES</b>               |                 |                |              |              |               |                |                 |                 |
| RVL I PLUS 5                                     | <b>2C09700F</b> | x              |              |              |               |                |                 |                 |
| RVL I PLUS 7                                     | <b>2C09701F</b> |                | x            |              |               |                |                 |                 |
| RVL I PLUS 9                                     | <b>2C09705F</b> |                |              | x            |               |                |                 |                 |
| RVL I PLUS 12                                    | <b>2C09706F</b> |                |              |              | x             |                |                 |                 |
| RVL I PLUS 12 T                                  | <b>2C09707F</b> |                |              |              |               | x              |                 |                 |
| RVL I PLUS 14 T                                  | <b>2C09704F</b> |                |              |              |               |                | x               |                 |
| RVL I PLUS 16 T                                  | <b>2C09709F</b> |                |              |              |               |                |                 | x               |
| VIBRATION DAMPERS                                | <b>2C0970CF</b> | x              | x            | x            | x             | x              | x               | x               |
| TEMP. SENSOR T1B SYSTEM FLOW                     | <b>2C0970BF</b> | x              | x            | x            | x             | x              | x               | x               |
| INERTIAL TANK (1)                                | NOT PROVIDED    | (1)            | (1)          | (1)          | (1)           | (1)            | (1)             | (1)             |
| 3-WAY DIVERTER VALVE (4)                         | NOT SUPPLIED    | (4)            | (4)          | (4)          | (4)           | (4)            | (4)             | (4)             |
| <b>B - BOILER + ACCESSORIES</b>                  |                 |                |              |              |               |                |                 |                 |
| BLUEHELIX PRO RRT 24 C                           | <b>0T3B2HWA</b> | x              | x            | x            | x             | x              | x               | x               |
| KIT FOR CONNECTION OF HYDRAULIC FITTINGS         | <b>012043W0</b> | (0)            | (0)          | (0)          | (0)           | (0)            | (0)             | (0)             |
| 80/80 TWIN PIPES DISCHARGE KIT                   | <b>041082X0</b> | x              | x            | x            | x             | x              | x               | x               |
| <b>C - DHW PRODUCTION WITHOUT SOLAR THERMAL</b>  |                 | <b>5HY5</b>    | <b>7HY5</b>  | <b>9HY5</b>  | <b>12HY5</b>  | <b>12THY5</b>  | <b>14THY5</b>   | <b>16THY5</b>   |
| ECOUNT 200 - 1C                                  | <b>GRZ4110A</b> | (5)            | (5)          | nd           | nd            | nd             | nd              | nd              |
| ECOUNT 300 - 1C                                  | <b>GRZ6310A</b> | x              | x            | nd           | nd            | nd             | nd              | nd              |
| ECOUNT 400 - 1C                                  | <b>GRZ7410A</b> | (5)            | (5)          | (5)          | (5)           | (5)            | (5)             | (5)             |
| ECOUNT 500 - 1C                                  | <b>GRZ8410A</b> | (5)            | (5)          | x            | x             | x              | x               | x               |
| THERMOSTATIC MIXER KIT                           | <b>013002X0</b> | x              | x            | x            | x             | x              | x               | x               |
| <b>D - DHW PRODUCTION WITH SOLAR THERMAL (3)</b> |                 | <b>5HY5S</b>   | <b>7HY5S</b> | <b>9HY5S</b> | <b>12HY5S</b> | <b>12THY5S</b> | <b>1S4THY5S</b> | <b>1S4THY5S</b> |
| ECOGEO H-2 SP 350                                | <b>20Z14980</b> | x              | x            | x            | x             | x              | x               | x               |
| ECOGEO H-2 SP 500                                | <b>20Z14990</b> | (5)            | (5)          | (5)          | (5)           | (5)            | (5)             | (5)             |
| THERMOSTATIC MIXER KIT                           | <b>013002X0</b> | x              | x            | x            | x             | x              | x               | x               |

## > HY6 - HYBRID SYSTEM EXAMPLE TABLE


| COMPONENTS                     | CODE            | CONFIGURATIONS |      |      |       |        |        |        |
|--------------------------------|-----------------|----------------|------|------|-------|--------|--------|--------|
|                                |                 | 5HY6           | 7HY6 | 9HY6 | 12HY6 | 12THY6 | 14THY6 | 16THY6 |
| <b>HEAT PUMP + ACCESSORIES</b> |                 |                |      |      |       |        |        |        |
| RVL I PLUS 5                   | <b>2C09700F</b> | x              |      |      |       |        |        |        |
| RVL I PLUS 7                   | <b>2C09701F</b> |                | x    |      |       |        |        |        |
| RVL I PLUS 9                   | <b>2C09705F</b> |                |      | x    |       |        |        |        |
| RVL I PLUS 12                  | <b>2C09706F</b> |                |      |      | x     |        |        |        |
| RVL I PLUS 12 T                | <b>2C09707F</b> |                |      |      |       | x      |        |        |
| RVL I PLUS 14 T                | <b>2C09704F</b> |                |      |      |       |        | x      |        |
| RVL I PLUS 16 T                | <b>2C09709F</b> |                |      |      |       |        |        | x      |
| VIBRATION DAMPERS              | <b>2C0970CF</b> | x              | x    | x    | x     | x      | x      | x      |
| TEMP. SENSOR T1B SYSTEM FLOW   | <b>2C0970BF</b> | x              | x    | x    | x     | x      | x      | x      |
| INERTIAL TANK 60 L (1)         | <b>2C0970DF</b> | (1)            | (1)  | (1)  | (1)   | (1)    | (1)    | (1)    |
| <b>BOILER + ACCESSORIES</b>    |                 |                |      |      |       |        |        |        |
| BLUEHELIX TECH RRT 24 H        | <b>0T3D2BWA</b> | x              | x    | x    | x     | x      | x      | x      |
| 5m STORAGE TANK PROBE KIT      | <b>043005X0</b> | x              | x    | x    | x     | x      | x      | x      |
| 80/80 TWIN PIPES DISCHARGE KIT | <b>041082X0</b> | x              | x    | x    | x     | x      | x      | x      |
| <b>DHW PRODUCTION</b>          |                 |                |      |      |       |        |        |        |
| AQUA1 PLUS 200 LT              | <b>2C0B604F</b> | x              | x    | x    | x     | x      | x      | x      |
| AQUA1 PLUS 260 LT              | <b>2C0B605F</b> | (5)            | (5)  | (5)  | (5)   | (5)    | (5)    | (5)    |
| THERMOSTATIC MIXER KIT         | <b>013002X0</b> | x              | x    | x    | x     | x      | x      | x      |

### NOTES


(0) Optional component - (1) Not required if the system water content is greater than 25 litres in both the heating circuit and, if applicable, in the cooling circuit. - (2) Not provided - guarantee greater exchange surface 1.4m<sup>2</sup> (RVL I 5/7) and greater 1.7m<sup>2</sup> (RVL I 10/14) - (3) For solar components, refer to the SOLAR THERMAL price list section, checking the correct combination of solar collectors and DHW storage. Solar Thermal not electronically managed by the HP. - (4) Use valves with a maximum switching time of less than 60 seconds. (5) Alternative solution - x proposed solution - nd Not combinable

## OVERALL DIMENSIONS

mod. 5 - 7 - 9



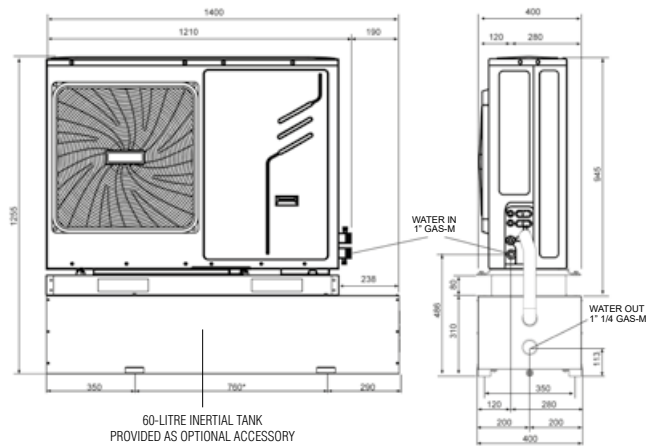


mod. 12 - 12T - 14T - 16T


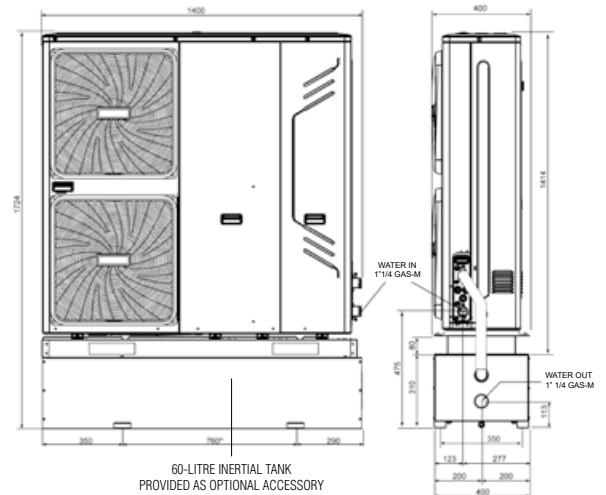


| MODEL                        | 5             | 7 | 9 | 12            | 12T       | 14T       | 16T       |
|------------------------------|---------------|---|---|---------------|-----------|-----------|-----------|
| Packaging dimensions (mm)    | 1500x1140x450 |   |   | 1475x1580x440 |           |           |           |
| Net \ Gross unit weight (kg) | 99 / 117      |   |   | 162 / 178     | 177 / 193 | 177 / 193 | 177 / 193 |

## OPERATING LIMITS

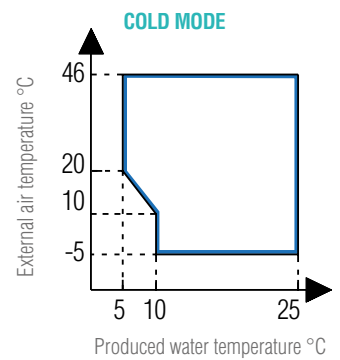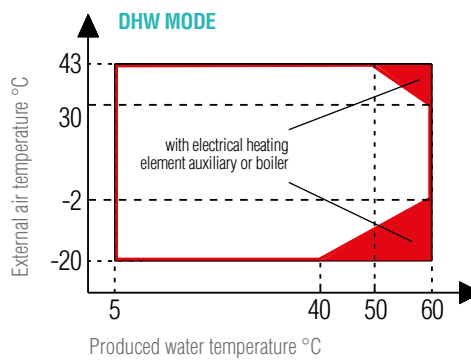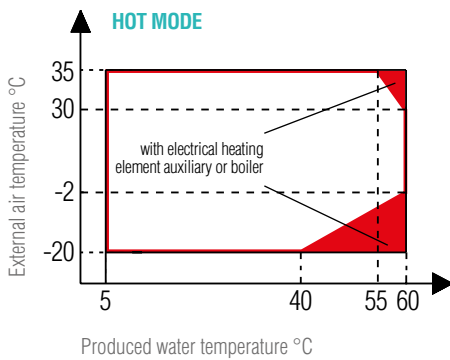

## MINIMUM OPERATING SPACES

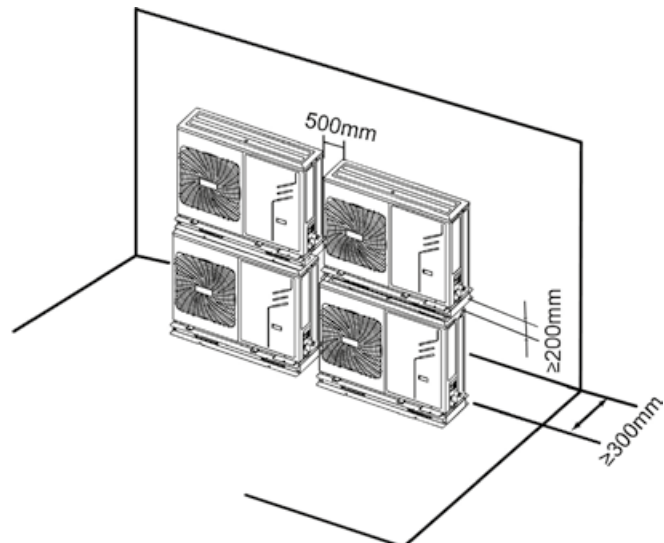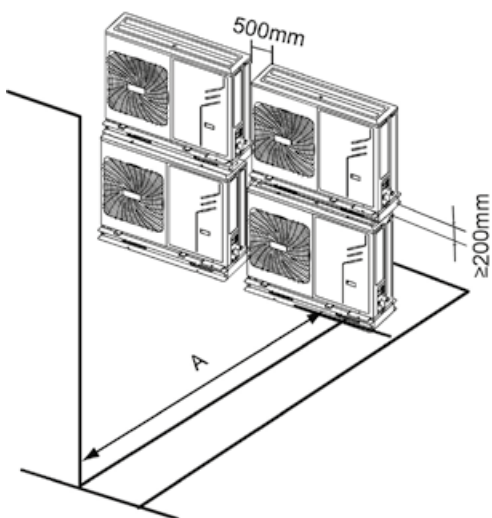

| MODEL  | 5    | 7 | 9 | 12   | 12T | 14T | 16T |
|--------|------|---|---|------|-----|-----|-----|
| A (mm) | 1000 |   |   | 1500 |     |     |     |

# AIR CONDITIONING

KEY OF SYMBOLS 192

## **DIRECT EXPANSION**

GOLD 3.2 193  
MULTI M 3.2 194  
COMMERCIAL 3.2 200  
ASTER S 205

# KEY OF SYMBOLS



Infrared remote control to control all of the functions of the DC air



Activated charcoal electrostatic filters provided



Anti-bacterial filters



SWING function (motorised deflecting fin)



Timer



Maintaining the memory and automatic restart-up in case of power outages



AUTO operating mode, enables Cool/Heat operation automatically based on room temperature and Set Point



DRY operating mode, it accentuates summer dehumidification phenomenon



FAN operating mode, starts the internal unit in ventilation only



Automatic fan speed regulation



Night operation (SLEEP). This increases night-time comfort by automatically adjusting fan speed and the set temperature



TURBO function brings operation to maximum load to reach the SET POINT quickly



Condensing drain pump on board the internal unit



Air ionisation



Can be connected with wall panel



Universal internal units combinable with external mono or multi split units



Frost Protection function, sets a minimum antifrost safety set point of 8°C



I FEEL function for local reading of the room temperature



## Direct current (DC) INVERTER technology

The direct current compressor installed on these units guarantees an **electromechanical efficiency of 30% more than TRADITIONAL INVERTER (AC) compressors.**



The products marked with this symbol are EUROVENT certified



R410A Eco Coolant. It observes the Montreal protocol, it does not damage the ozone because it is HCFC-free



R134A Eco Coolant. It observes the Montreal protocol, it does not damage the ozone because it is HCFC-free



R32 Eco Coolant. It observes the Montreal protocol, it does not damage the ozone because it is HCFC-free



The products are all ROHS-compatible according to Directive 2002/95/EC



Max temperature of produced water



Operating Mode in Cooling



Operating Mode in Heating



Auto Clean function, dries the internal battery after cold operation or dehumidification to avoid the formation of unpleasant odours



This guarantees cold operation also with outdoor temperature of -15°C



Coolant leak signalling system



Self-diagnosis System and description of any anomalies



# GOLD 3.2

## WALL-HUNG MONOSPLIT DC INVERTER IN HEAT PUMP

**NEW**




### > GENERAL CHARACTERISTICS:

- R32 Eco Coolant
- Efficiency Class A++ / A+
- Temperature display on board the machine
- Featuring direct current inverter technology
- Internal unit with particularly appealing and modern design
- External unit equipped with fitting covers and sound absorbent jacket
- Easily removable intake grid and filters for quick cleaning
- Automatic restart in case of power outage
- Night operating mode / "AUTOMATIC" mode / Timer function
- External unit treated with protective anti-rust substances




#### INTERNAL UNIT



| MODEL | L mm | H mm | D mm |
|-------|------|------|------|
| 9     | 821  | 283  | 201  |
| 12    | 884  | 298  | 205  |
| 18    | 1003 | 310  | 222  |
| 22    | 1110 | 330  | 240  |

#### EXTERNAL UNIT



| MODEL | L mm | H mm | D mm |
|-------|------|------|------|
| 9     | 762  | 540  | 257  |
| 12    | 762  | 540  | 257  |
| 18    | 820  | 598  | 302  |
| 22    | 890  | 700  | 340  |



| MODELS  |                         |                 | 9                     | 12                    | 18                    | 22                      |
|---|-------------------------|-----------------|-----------------------|-----------------------|-----------------------|-------------------------|
| ERP Class   | in Cold                 | (Class E - A++) | A++                   | A++                   | A++                   | A++                     |
|   | in Hot                  | (Class E - A++) | A+                    | A+                    | A+                    | A+                      |
| Power supply  |                         | V-f-Hz          | 230-1-50              |                       |                       |                         |
| Cooling capacity <sup>(1)</sup>                     | Nom-Min-Max             | W               | 2600-400-3300         | 3500-550-4000         | 5270-1000-6700        | 6450-1400-7000          |
| Total power absorbed in cooling <sup>(1)</sup>      | Nom-Min-Max             | W               | 750-150-1430          | 1010-180-1560         | 1540-320-2460         | 1840-380-2800           |
| Nominal current in cooling <sup>(1)</sup>           |                         | A               | 3.3                   | 4.5                   | 6.8                   | 8.2                     |
| Dehumidification <sup>(1)</sup>                     |                         | l/h             | 0.8                   | 1.4                   | 1.8                   | 2.4                     |
| EER ref. Standard EN14511 (nominal) <sup>(1)</sup>  |                         | W/W             | 3.47                  | 3.47                  | 3.42                  | 3.51                    |
| SEER ref. Standard EN14825                          |                         | W/W             | 6.7                   | 6.5                   | 6.3                   | 6.4                     |
| PdesigC   |                         | kW              | 2.6                   | 3.5                   | 5.2                   | 6.4                     |
| Heat output <sup>(2)</sup>                          | Nom-Min-Max             | W               | 2800-400-4100         | 3650-600-5130         | 5500-1100-6800        | 6600-1500-7900          |
| Total absorbed power in heating <sup>(2)</sup>      | Nom-Min-Max             | W               | 745-180-1550          | 970-220-1800          | 1430-350-2300         | 1750-400-2500           |
| Rated current in heating <sup>(2)</sup>             |                         | A               | 3.3                   | 4.3                   | 6.3                   | 7.8                     |
| COP ref. Standard EN14511 (nominal) <sup>(2)</sup>  |                         | W/W             | 3.76                  | 3.76                  | 3.85                  | 3.77                    |
| SCOP ref. Standard EN14825                          |                         | W/W             | 4.00                  | 4.00                  | 4.00                  | 4.00                    |
| Reference climatic zone ref. Standard EN14825       |                         | Type            | A (temperate)         |                       |                       |                         |
| PdesigH   |                         | kW              | 2.6                   | 3.2                   | 5.0                   | 6.2                     |
| Internal unit air flow rate                         | S-Max / Max / Med / Min | m³/h            | 530 / 490 / 430 / 330 | 660 / 540 / 460 / 330 | 870 / 720 / 610 / 520 | 1150 / 1050 / 950 / 850 |
| Internal unit sound pressure <sup>(3)</sup>         | S-Max / Max / Med / Min | dB(A)           | 39 / 36 / 44 / 38     | 54 / 51 / 45 / 38     | 58 / 54 / 51 / 48     | 60 / 57 / 54 / 51       |
| External unit air flow rate                         |                         | m³/h            | 1800                  | 1800                  | 2800                  | 3300                    |
| External unit sound pressure / power <sup>(3)</sup> |                         | dB(A)           | 52 / 61               | 53 / 62               | 56 / 63               | 60 / 68                 |
| Liquid / gas line fittings                          |                         | inch            | 1/4 - 3/8             | 1/4 - 3/8             | 1/4 - 1/2             | 1/4 - 5/8               |
| Maximum cooling line length                         |                         | m               | 20                    | 20                    | 25                    | 25                      |
| Maximum gradient                                    |                         | m               | 10                    | 10                    | 10                    | 10                      |
| Internal / external unit net weight                 |                         | Kg              | 9.5 / 29              | 10.5 / 30             | 14 / 40               | 16.5 / 43.5             |
| CODE  | INTERNALUNIT            |                 | 2C0A901F              | 2C0A902F              | 2C0A903F              | 2C0A904F                |
|   | EXTERNALUNIT            |                 | 2C0A921F              | 2C0A922F              | 2C0A923F              | 2C0A924F                |

(1) Outdoor air temperature = 35°C D.B. • Room air temperature = 27°C D.B. / 19°C W.B. - (2) Outdoor air temperature = 7°C D.B. / 6°C W.B. • Room air temperature = 20°C D.B. - (3) Sound pressure measured at distance of 1 m: E.U. in open field, I.U. in space of 100 m³ with reverberation time of 0.5 seconds

# MULTI M 3.2

## MULTISPLIT DC INVERTER IN HEAT PUMP


**NEW**



### > GENERAL CHARACTERISTICS:


- R32 Eco Coolant
- Efficiency Class A++ / A+
- Broad range of combinable powers
- Featuring direct current inverter technology
- External unit can be combined with different types of internal units
- External unit equipped with fitting covers and sound absorbent jacket
- Automatic restart in case of power outage
- Easily removable intake grid and filters for quick cleaning
- Night operating mode / "AUTOMATIC" mode / Timer function
- Unit equipped with remote control (wall hung and cassette units) and wired control (ducted units)
- External unit treated with protective anti-rust substances

### WALL-HUNG INTERNAL UNIT




| U.I. | L mm | H mm | D mm |
|------|------|------|------|
| 7    | 821  | 283  | 201  |
| 9    | 821  | 283  | 201  |
| 12   | 884  | 298  | 205  |
| 18   | 1003 | 310  | 222  |

### EXTERNAL UNIT

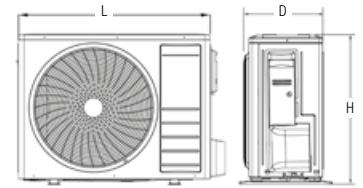


| U.E. | L mm | H mm | D mm |
|------|------|------|------|
| 18-2 | 960  | 700  | 340  |
| 24-3 | 990  | 790  | 370  |
| 28-4 | 990  | 790  | 370  |

### DUCTED INTERNAL UNIT

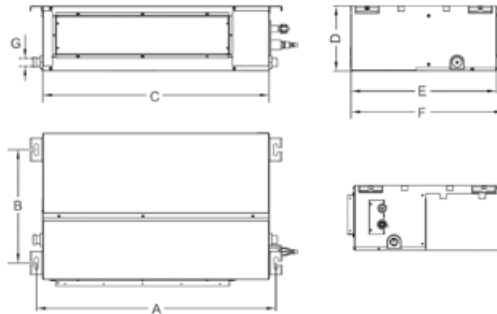

| DUCTED | A mm | B mm | C mm | D mm | E mm | F mm | G mm |
|--------|------|------|------|------|------|------|------|
| 9      | 740  | 350  | 700  | 200  | 450  | 472  | 26   |
| 12     | 740  | 350  | 700  | 200  | 450  | 472  | 26   |
| 18     | 1040 | 350  | 1000 | 200  | 450  | 472  | 26   |

### INTERNAL CASSETTE UNIT

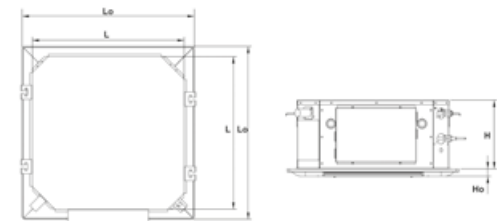

| CASSETTE | H mm | Ho mm | L mm | Lo mm |
|----------|------|-------|------|-------|
| 12       | 258  | 28    | 574  | 650   |
| 18       | 258  | 28    | 574  | 650   |



#### GENERAL



#### STANDARD SUPPLY



#### STANDARD FUNCTIONS



#### SPECIAL FUNCTIONS





| EXTERNAL UNIT                          |           |                             | 18-2            | 24-3            | 28-4            |
|--|-----------|-----------------------------|-----------------|-----------------|-----------------|
| Nominal combination                    |           |                             | 9 + 9           | 7 + 9 + 9       | 7 + 7 + 7 + 7   |
| ERP Class                              | when cold | (Class E - A <sup>+</sup> ) | A <sup>++</sup> | A <sup>++</sup> | A <sup>++</sup> |
|  | when hot  | (Class E - A <sup>+</sup> ) | A <sup>+</sup>  | A <sup>+</sup>  | A <sup>+</sup>  |
| Power supply                           |           | V-Ph-Hz                     | 230/1/50        |                 |                 |
| Cooling Capacity*                      | Nominal   | W                           | 5200            | 7000            | 8200            |
|  | Min-Max   | W                           | 2100-5900       | 2300-8450       | 2300-10550      |
| Total power absorbed in cooling*       | Nominal   | W                           | 1400            | 1900            | 2300            |
|  | Min-Max   | W                           | 560-1590        | 1050-2850       | 1200 - 3000     |
| Nominal current in cooling*            |           | A                           | 6.17            | 8.38            | 10.2            |
| EER ref. Standard EN14511 (nominal) *  |           | W/W                         | 3.71            | 3.68            | 3.57            |
| SEER ref. Standard EN14825             |           | W/W                         | 6.10            | 6.10            | 6.1             |
| PdesigC                                |           | kW                          | 5.2             | 7.0             | 8.2             |
| Heat Output                            | Nominal   | W                           | 5200            | 7000            | 8200            |
|  | Min-Max   | W                           | 2550-5950       | 3500-8600       | 4100 - 10700    |
| Total absorbed power in heating        | Nominal   | W                           | 1250            | 1650            | 2100            |
|  | Min-Max   | W                           | 800-1800        | 950-2800        | 1100 - 2900     |
| Rated current in heating*              |           | A                           | 5.5             | 7.2             | 9.32            |
| COP ref. Standard EN14511 (nominal) *  |           | W/W                         | 4.16            | 4.24            | 3.9             |
| SCOP * ref. Standard EN14825           |           | W/W                         | 4.00            | 4.00            | 4               |
| PdesigH                                |           | kW                          | 5.2             | 7.0             | 8.2             |
| Reference climatic zone                |           | Type                        | A (temperate)   |                 |                 |
| Equilibrium temp T <sub>biv</sub>      |           | °C                          | -7              |                 |                 |
| Maximum time for use Tol               |           | °C                          | -10             |                 |                 |
| Air flow rate                          |           | m <sup>3</sup> /h           | 3000            | 3500            | 3500            |
| Sound power **                         |           | dB(A)                       | 54              | 55              | 55              |
| Coolant                                |           | type                        | R32             |                 |                 |
| Packaging dimensions                   | L         | mm                          | 1029            | 1083            | 1083            |
|  | H         | mm                          | 750             | 855             | 855             |
|  | D         | mm                          | 458             | 488             | 488             |
| Net weight / Gross weight              |           | kg                          | 51/55.5         | 68/73           | 68/77           |
| Liquid line fittings (Q.ty x Diameter) |           | No. x inch                  | 2x1/4"          | 3x1/4"          | 4x1/4"          |
| Gas line fittings (Q.ty x Diameter)    |           | No. x inch                  | 2x3/8"          | 3x3/8"          | 4x3/8"          |
| <b>CODE</b>                            |           |                             | <b>2C0A9A3F</b> | <b>2C0A9A4F</b> | <b>2C0A9A5F</b> |

Notes: In cooling: Room air temperature 27°C B.S 19°C B.U Outdoor temperature 35°C B.S - In heating: Room air temperature 20°C B.S Outdoor temperature 7°C B.S 6°C B.U  
 \*: Data referring to the stated nominal combination \*\*: Data referring to 1 m of distance from the unit



| WALL-HUNG INTERNAL UNIT                                |   |                   | 7               | 9               | 12              | 18              |
|--|---|-------------------|-----------------|-----------------|-----------------|-----------------|
| Power supply   |   | V-F-Hz            | 230/1/50        |                 |                 |                 |
| Cooling Capacity                                       |   | W                 | 2100            | 2600            | 3500            | 5270            |
| Heating Capacity                                       |   | W                 | 2300            | 2800            | 3650            | 5500            |
| Flow rate of internal unit (S-Max - Max-med-min)       |   | m <sup>3</sup> /h | 480/440/380/330 | 530/490/430/330 | 660/540/460/330 | 870/720/610/520 |
| Sound pressure of internal unit* (S-Max - Max-med-min) |   | dB(A)             | 37/33/31/26     | 39/36/32/26     | 42/39/33/26     | 46/42/39/36     |
|  |   | mm                | 871             | 871             | 930             | 1047            |
| Packaging dimensions                                   | H | mm                | 290             | 290             | 297             | 314             |
|  | L | mm                | 352             | 352             | 352             | 377             |
|  | D | mm                | 9.5/12          | 9.5/12          | 10.5/14         | 14/17           |
| Net weight / Gross weight                              |   | kg                | 9.5/12          | 9.5/12          | 10.5/14         | 14/17           |
| Liquid line fittings                                   |   | inch              | 1/4"            | 1/4"            | 1/4"            | 1/4"            |
| Gas line fittings                                      |   | inch              | 3/8"            | 3/8"            | 3/8"            | 1/2"            |
| <b>CODE</b>  |   |                   | <b>2C0A900F</b> | <b>2C0A901F</b> | <b>2C0A902F</b> | <b>2C0A903F</b> |

Notes:  
 In cooling Room air temperature 27°C B.S 19°C B.U Outdoor temperature 35°C B.S - In heating Room air temperature 20°C B.S Outdoor temperature 7°C B.S 6°C B.U  
 \*: Sound pressure measures at 1 meter of distance: in a space of 100m<sup>3</sup> with reverberation time of 0.5 seconds.



| DUCTED INTERNAL UNIT                             |        |    | 9               | 12              | 18              |
|--|--------|----|-----------------|-----------------|-----------------|
| Power supply                                     | V-F-Hz |    | 230/1/50        |                 |                 |
| Cooling Capacity                                 | W      |    | 2600            | 3500            | 5200            |
| Heating Capacity                                 | W      |    | 2600            | 3500            | 5200            |
| Flow rate of internal unit (S.Max - Max-med-min) | m³/h   |    | 600/550/380/300 | 800/730/440/350 | 920/800/630/460 |
| Sound pressure (S-Max - Max-med-min)             | dB(A)  |    | 40/39/30/26     | 42/41/30/27     | 43/42/37/33     |
| Sound power (S.Max - Max-med-min)                | dB(A)  |    | 52/51/42/38     | 54/53/42/39     | 55/54/49/45     |
| Packaging dimensions                             | H      | mm | 887             | 887             | 1188            |
|  | L      | mm | 263             | 263             | 263             |
|  | D      | mm | 536             | 536             | 539             |
| Net weight / Gross weight                        | kg     |    | 16/18.5         | 17/19           | 23/25.5         |
| Liquid line fittings                             | inch   |    | 1/4"            | 1/4"            | 1/4"            |
| Gas line fittings                                | inch   |    | 3/8"            | 3/8"            | 1/2"            |
| <b>CODE</b>                                      |        |    | <b>2C0A831F</b> | <b>2C0A832F</b> | <b>2C0A833F</b> |

**Notes:**

**In cooling** Room air temperature 27°C B.S 19°C B.U Outdoor temperature 35°C B.S

**In heating** Room air temperature 20°C B.S Outdoor temperature 7°C B.S 6°C B.U

\*: **Sound pressure measures at 1 meter of distance:** in a space of 100m³ with reverberation time of 0.5 seconds.



| INTERNAL CASSETTE UNIT                 |         |    | 12              | 18              |
|--|---------|----|-----------------|-----------------|
| Power supply                           | V-Ph-Hz |    | 230/1/50        |                 |
| Cooling Capacity                       | W       |    | 3500            | 5200            |
| Heating Capacity                       | W       |    | 3500            | 5200            |
| Air flow rate max - med - min          | m³/h    |    | 700/620/540     | 760/650/580     |
| Maximum electrical absorption          | W       |    | 60              | 73              |
| Sound pressure max - med - min         | dB(A)   |    | 47/44/39        | 48/45/42        |
| Sound power max - med - min            | dB(A)   |    | 59/56/51        | 60/57/54        |
| Unit packaging dimensions              | H       | mm | 300             | 300             |
|  | L       | mm | 730             | 730             |
|  | D       | mm | 730             | 730             |
| Grid packaging dimensions              | H       | mm | 100             | 100             |
|  | L       | mm | 750             | 750             |
|  | D       | mm | 750             | 750             |
| Net weight / Gross weight of unit      | kg      |    | 19 / 22         | 19 / 22         |
| Net weight / Gross weight of grid      | kg      |    | 2.2 / 4.0       | 2.2 / 4.0       |
| Liquid line fittings (Q.ty x Diameter) | inch    |    | 1/4"            | 1/4"            |
| Gas line fittings (Q.ty x Diameter)    | inch    |    | 3/8"            | 1/2"            |
| <b>CODE</b>                            |         |    | <b>2C0A812F</b> | <b>2C0A813F</b> |



**Universal grid to be associated**

|             |                 |
|-------------|-----------------|
| <b>CODE</b> | <b>2C0A90AF</b> |
|-------------|-----------------|

**Notes:**


**In cooling** Room air temperature 27°C B.S 19°C B.U Outdoor temperature 35°C B.S

**In heating** Room air temperature 20°C B.S Outdoor temperature 7°C B.S 6°C B.U

\*: **Sound pressure measures at 1 meter of distance:** in a space of 100m³ with reverberation time of 0.5 seconds.

## LIMITS ON LENGTH AND GRADIENT OF COOLANT PIPES

The length of the coolant pipes between the indoor and outdoor units must be as short as possible, and is, in any case, limited by observing the maximum gradient between the units. As the difference in height between the units (H1, H2) and the length of the pipes (L) decreases, the pressure drops will decrease, thereby increasing the overall efficiency of the machine. Observe the limitations provided in the following tables

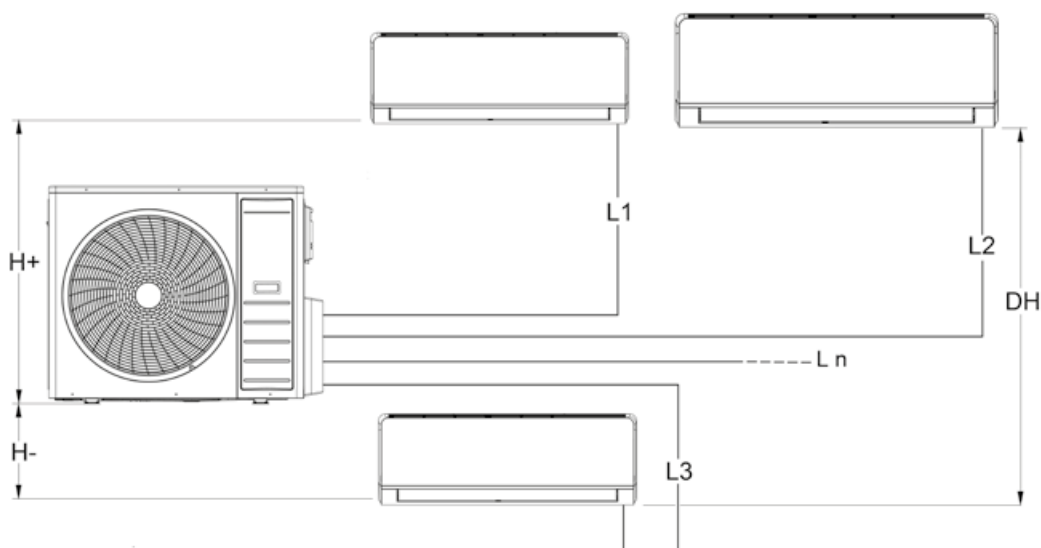

| EXTERNAL UNIT                                    |        |     | 18-2 |     | 24-3 |     |     | 28-4 |     |     |     |
|--|--------|-----|------|-----|------|-----|-----|------|-----|-----|-----|
| Diameter   | Liquid | "   | 1/4  | 1/4 | 1/4  | 1/4 | 1/4 | 1/4  | 1/4 | 1/4 | 1/4 |
|  | Gas    | "   | 3/8  | 3/8 | 3/8  | 3/8 | 3/8 | 3/8  | 3/8 | 3/8 | 3/8 |
| Total maximum length                             |        | m   | 30   |     | 60   |     |     | 70   |     |     |     |
| Maximum length of single unit                    |        | m   | 15   |     | 20   |     |     | 20   |     |     |     |
| Maximum gradient                                 | H+     | m   | 5    |     | 10   |     |     | 10   |     |     |     |
|  | H-     | m   | 5    |     | 10   |     |     | 10   |     |     |     |
|  | DH     | m   | 5    |     | 5    |     |     | 5    |     |     |     |
| Total maximum length of pipes with standard load |        | m   | 10   |     | 30   |     |     | 10   |     |     |     |
| Type of coolant                                  |        | -   | R32  |     |      |     |     |      |     |     |     |
| Additional amount of coolant per meter           |        | g/m | 22   | 22  | 22   | 22  | 22  | 22   | 22  | 22  | 22  |

## TABLE OF POSSIBLE COMBINATIONS

| EXTERNAL UNIT | CONNECTED INTERNAL UNITS |         |         |              |             |              |               |               |  |
|---------------|--------------------------|---------|---------|--------------|-------------|--------------|---------------|---------------|--|
|               | 1                        | 2       |         | 3            |             |              | 4             |               |  |
| 18-2          | 7K                       | 7K+7K   | 7K+9K   | not required |             |              |               | not required  |  |
|               | 9K                       | 7K+12K  | 9K+9K   | not required |             |              |               | not required  |  |
|               | 12K                      | 9K+12K  | 12K+12K | not required |             |              |               | not required  |  |
| 24-3          | not required             | 7K+7K   | 7K+9K   | 7K+7K+7K     | 7K+7K+9K    | 7K+7K+12K    | not required  |               |  |
|               |                          | 7K+12K  | 7K+18K  | 7K+7K+18K    | 7K+9K+9K    | 7K+9K+12K    | not required  |               |  |
|               |                          | 9K+9K   | 9K+12K  | 7K+9K+18K    | 7K+12K+12K  | 9K+9K+18K    | not required  |               |  |
|               |                          | 9K+18K  | 12K+12K | 9K+9K+9K     | 9K+9K+12K   | not required | not required  |               |  |
|               |                          | 12K+18K | 18K+18K | 9K+12K+12K   | 12K+12K+12K | not required | not required  |               |  |
| 28-4          | not required             | 7K+7K   | 7K+9K   | 7K+7K+7K     | 7K+7K+9K    | 7K+7K+12K    | 7K+7K+7K+7K   | 7K+7K+7K+9K   |  |
|               |                          | 7K+12K  | 7K+18K  | 7K+7K+18K    | 7K+9K+12K   | 7K+9K+9K     | 7K+7K+7K+12K  | 7K+7K+7K+18K  |  |
|               |                          | -       | -       | 7K+9K+18K    | -           | 7K+12K+12K   | 7K+7K+9K+9K   | 7K+7K+9K+12K  |  |
|               |                          | 9K+9K   | 9K+12K  | 7K+12K+18K   | -           | 9K+12K+12K   | 7K+7K+9K+18K  | 7K+7K+12K+12K |  |
|               |                          | 9K+18K  | 12K+12K | 9K+9K+12K    | 9K+9K+18K   | 9K+12K+18K   | 7K+9K+9K+9K   | 7K+9K+9K+12K  |  |
|               |                          | 12K+18K | 18K+18K | 12K+12K+12K  | 12K+12K+18K | -            | 7K+9K+12K+12K | 9K+9K+9K+9K   |  |
|               |                          | -       | -       | -            | -           | -            | 9K+9K+9K+12K  | 9K+9K+12K+12K |  |

NOTE: • combinations where the total power required by the indoor units is compatible with the nominal power of the outdoor unit.

• combinations where the total power required by the indoor units is greater than the nominal power of the outdoor unit. When there is a simultaneous request of power by all the connected units, the power available for the single units will be in line with the contents of the previous table.

• THE NOMINAL COMBINATIONS OF REFERENCE ARE HIGHLIGHTED IN BLUE.

## COLD PERFORMANCE

| Model         | No. unit    | Combination | COLD Operation        |             |             |             |                |            |              |                  |            |             |                       |             |              |             | Class Energy |            |
|---------------|-------------|-------------|-----------------------|-------------|-------------|-------------|----------------|------------|--------------|------------------|------------|-------------|-----------------------|-------------|--------------|-------------|--------------|------------|
|               |             |             | Partial capacity Room |             |             |             | Total capacity |            |              | Total absorption |            |             | Total absorption 230V |             |              | EER         |              | SEER       |
|               |             |             | kW                    |             |             |             | kW             |            |              | kW               |            |             | Ampere                |             |              | W/W         |              | W/W        |
|               |             |             | A                     | B           | C           | D           | Min            | Nom        | Max          | Min              | Nom        | Max         | Min                   | Nom         | Max          | Nom         |              | W/W        |
| 18-2          | 1 unit      | 7K          | 2.1                   | -           | -           | -           | 1.6            | 2.1        | 3.05         | 0.53             | 0.79       | 1.27        | 2.33                  | 3.48        | 5.58         | 2.65        | 6.3          | A++        |
|               |             | 9K          | 2.6                   | -           | -           | -           | 1.7            | 2.6        | 3.25         | 0.57             | 0.79       | 1.27        | 2.5                   | 3.48        | 5.58         | 3.28        | 6.3          | A++        |
|               |             | 12K         | 3.5                   | -           | -           | -           | 2.05           | 3.5        | 4.05         | 0.51             | 1.03       | 1.27        | 2.24                  | 4.51        | 5.58         | 3.41        | 6.3          | A++        |
|               | 2 units     | 7K+7K       | 2.3                   | 2.3         | -           | -           | 2.1            | 4.6        | 4.9          | 0.56             | 1.19       | 1.59        | 2.46                  | 5.24        | 6.98         | 3.85        | 6.2          | A++        |
|               |             | 7K+9K       | 2.2                   | 2.5         | -           | -           | 2.1            | 4.7        | 5            | 0.56             | 1.22       | 1.63        | 2.46                  | 5.36        | 7.16         | 3.85        | 6.2          | A++        |
|               |             | 7K+12K      | 2.1                   | 3.1         | -           | -           | 2.2            | 5.2        | 5.9          | 0.57             | 1.35       | 1.59        | 2.5                   | 5.94        | 6.98         | 3.84        | 6.1          | A++        |
|               |             | 9K+9K       | <b>2.6</b>            | <b>2.6</b>  | -           | -           | <b>2.1</b>     | <b>5.2</b> | <b>5.9</b>   | <b>0.56</b>      | <b>1.4</b> | <b>1.59</b> | <b>2.46</b>           | <b>6.17</b> | <b>6.98</b>  | <b>3.72</b> | <b>6.1</b>   | <b>A++</b> |
|               |             | 9K+12K      | 2.4                   | 2.9         | -           | -           | 2.2            | 5.3        | 5.95         | 0.57             | 1.42       | 1.59        | 2.5                   | 6.23        | 6.98         | 3.74        | 6.1          | A++        |
|               |             | 12K+12K     | 2.75                  | 2.75        | -           | -           | 2.2            | 5.5        | 6            | 0.57             | 1.45       | 1.59        | 2.5                   | 6.35        | 6.98         | 3.8         | 6.1          | A++        |
|               |             | 7K+7K       | 2.35                  | 2.35        | -           | -           | 2.05           | 4.7        | 5.5          | 0.95             | 1.31       | 1.96        | 4.2                   | 5.79        | 8.6          | 3.58        | 6.3          | A++        |
|               |             | 7K+9K       | 2.1                   | 2.7         | -           | -           | 2.05           | 4.8        | 5.5          | 0.95             | 1.33       | 1.96        | 4.2                   | 5.88        | 8.6          | 3.61        | 6.3          | A++        |
|               |             | 7K+12K      | 2                     | 3.3         | -           | -           | 2.15           | 5.3        | 6.15         | 0.96             | 1.47       | 2.02        | 4.2                   | 6.42        | 8.9          | 3.62        | 6.2          | A++        |
| 24-3          | 2 units     | 7K+18K      | 1.7                   | 4.4         | -           | -           | 2.15           | 6.1        | 6.5          | 1                | 1.69       | 2.12        | 4.4                   | 7.42        | 9.3          | 3.61        | 6.1          | A++        |
|               |             | 9K+9K       | 2.65                  | 2.65        | -           | -           | 2.05           | 5.3        | 6.15         | 0.95             | 1.47       | 1.97        | 4.2                   | 6.42        | 8.6          | 3.62        | 6.2          | A++        |
|               |             | 9K+12K      | 2.45                  | 3.25        | -           | -           | 2.15           | 5.7        | 6.35         | 1                | 1.58       | 2.02        | 4.4                   | 6.97        | 8.9          | 3.6         | 6.2          | A++        |
|               |             | 9K+18K      | 2.05                  | 4.15        | -           | -           | 2.15           | 6.2        | 6.75         | 1                | 1.74       | 2.18        | 4.4                   | 7.6         | 9.6          | 3.57        | 6.1          | A++        |
|               |             | 12K+12K     | 3.05                  | 3.05        | -           | -           | 2.15           | 6.1        | 6.55         | 1                | 1.69       | 2.13        | 4.4                   | 7.42        | 9.4          | 3.61        | 6.1          | A++        |
|               |             | 12K+18K     | 2.5                   | 3.7         | -           | -           | 2.15           | 6.2        | 6.7          | 1                | 1.74       | 2.17        | 4.4                   | 7.6         | 9.5          | 3.57        | 6.1          | A++        |
|               |             | 18K+18K     | 3.2                   | 3.2         | -           | -           | 2.15           | 6.4        | 6.7          | 1                | 1.78       | 2.17        | 4.4                   | 7.78        | 9.5          | 3.59        | 6.1          | A++        |
|               |             | 7K+7K+7K    | 2.27                  | 2.27        | 2.26        | -           | 2.2            | 6.8        | 8.45         | 1.05             | 1.85       | 2.85        | 4.6                   | 8.23        | 12.5         | 3.68        | 6.1          | A++        |
|               |             | 7K+7K+9K    | 2.2                   | 2.2         | 2.6         | -           | 2.3            | 7          | 8.45         | 1.05             | 1.9        | 2.85        | 4.6                   | 8.38        | 12.5         | 3.68        | 6.1          | A++        |
|               |             | 7K+7K+12K   | 1.9                   | 1.9         | 3.3         | -           | 2.3            | 7.1        | 8.4          | 1.05             | 1.9        | 2.84        | 4.6                   | 8.38        | 12.5         | 3.74        | 6.1          | A++        |
|               |             | 7K+7K+18K   | 1.6                   | 1.6         | 4           | -           | 2.3            | 7.2        | 8.4          | 1.15             | 1.92       | 2.84        | 5.1                   | 8.42        | 12.5         | 3.75        | 6.1          | A++        |
|               |             | 7K+9K+9K    | <b>2</b>              | <b>2.5</b>  | <b>2.5</b>  | -           | <b>2.3</b>     | <b>7</b>   | <b>8.45</b>  | <b>1.05</b>      | <b>1.9</b> | <b>2.85</b> | <b>4.6</b>            | <b>8.34</b> | <b>12.5</b>  | <b>3.68</b> | <b>6.1</b>   | <b>A++</b> |
|               | 3 units     | 7K+9K+12K   | 1.8                   | 2.25        | 3.05        | -           | 2.3            | 7.1        | 8.4          | 1.05             | 1.9        | 2.84        | 4.6                   | 8.34        | 12.5         | 3.74        | 6.1          | A++        |
|               |             | 7K+9K+18K   | 1.5                   | 1.9         | 3.85        | -           | 2.3            | 7.25       | 8.4          | 1.15             | 1.93       | 2.84        | 5.1                   | 8.46        | 12.5         | 3.76        | 6.1          | A++        |
|               |             | 7K+12K+12K  | 1.7                   | 2.75        | 2.75        | -           | 2.3            | 7.2        | 8.4          | 1.15             | 1.92       | 2.84        | 5.1                   | 8.42        | 12.5         | 3.75        | 6.1          | A++        |
|               |             | 9K+9K+9K    | 2.37                  | 2.37        | 2.36        | -           | 2.3            | 7.1        | 8.4          | 0.96             | 1.9        | 2.84        | 4.2                   | 8.34        | 12.5         | 3.74        | 6.1          | A++        |
|               |             | 9K+9K+12K   | 2.2                   | 2.2         | 2.9         | -           | 2.3            | 7.2        | 8.4          | 1.05             | 1.92       | 2.84        | 4.6                   | 8.42        | 12.5         | 3.75        | 6.1          | A++        |
|               |             | 9K+9K+18K   | 1.85                  | 1.85        | 3.6         | -           | 2.3            | 7.3        | 8.4          | 1.15             | 1.95       | 2.84        | 5.1                   | 8.59        | 12.5         | 3.74        | 6.1          | A++        |
| 2 units       | 9K+12K+12K  | 2           | 2.6                   | 2.6         | -           | 2.3         | 7.2            | 8.4        | 1.15         | 1.92             | 2.84       | 5.1         | 8.42                  | 12.5        | 3.75         | 6.1         | A++          |            |
|               | 12K+12K+12K | 2.42        | 2.42                  | 2.41        | -           | 2.3         | 7.25           | 8.4        | 1.15         | 1.94             | 2.84       | 5.1         | 8.5                   | 12.5        | 3.74         | 6.1         | A++          |            |
|               | 7K+7K       | 2.5         | 2.5                   | -           | -           | 2.18        | 5              | 6.38       | 1.01         | 1.54             | 2.09       | 4.44        | 6.77                  | 9.16        | 3.24         | 6.3         | A++          |            |
|               | 7K+9K       | 2.3         | 2.8                   | -           | -           | 2.18        | 5.1            | 6.37       | 1.01         | 1.56             | 2.08       | 4.43        | 6.86                  | 9.15        | 3.27         | 6.3         | A++          |            |
|               | 7K+12K      | 2.15        | 3.45                  | -           | -           | 2.27        | 5.6            | 7.09       | 1.01         | 1.71             | 2.13       | 4.45        | 7.52                  | 9.37        | 3.27         | 6.2         | A++          |            |
|               | 7K+18K      | 1.9         | 4.6                   | -           | -           | 2.29        | 6.5            | 7.55       | 1.07         | 1.99             | 2.26       | 4.68        | 8.75                  | 9.92        | 3.26         | 6.2         | A++          |            |
|               | 9K+9K       | 2.8         | 2.8                   | -           | -           | 2.17        | 5.6            | 7.09       | 1            | 1.71             | 2.08       | 4.41        | 7.52                  | 9.14        | 3.27         | 6.2         | A++          |            |
|               | 9K+12K      | 2.6         | 3.4                   | -           | -           | 2.26        | 6              | 7.29       | 1.05         | 1.84             | 2.13       | 4.62        | 8.09                  | 9.34        | 3.26         | 6.2         | A++          |            |
|               | 9K+18K      | 2.25        | 4.4                   | -           | -           | 2.31        | 6.65           | 7.89       | 1.07         | 2.06             | 2.34       | 4.71        | 9.04                  | 10.27       | 3.23         | 6.1         | A++          |            |
|               | 12K+12K     | 3.3         | 3.3                   | -           | -           | 2.33        | 6.6            | 7.73       | 1.08         | 2.02             | 2.3        | 4.75        | 8.89                  | 10.12       | 3.26         | 6.1         | A++          |            |
|               | 12K+18K     | 2.75        | 3.95                  | -           | -           | 2.32        | 6.7            | 7.89       | 1.08         | 2.07             | 2.35       | 4.75        | 9.11                  | 10.3        | 3.23         | 6.1         | A++          |            |
|               | 18K+18K     | 3.45        | 3.45                  | -           | -           | 2.32        | 6.9            | 7.88       | 1.08         | 2.12             | 2.34       | 4.73        | 9.33                  | 10.27       | 3.25         | 6.1         | A++          |            |
| 28-4          | 3 units     | 7K+7K+7K    | 2.3                   | 2.3         | 2.3         | -           | 2.23           | 6.9        | 9.35         | 1.07             | 2.07       | 2.89        | 4.68                  | 9.09        | 12.7         | 3.33        | 6.1          | A++        |
|               |             | 7K+7K+9K    | 2.3                   | 2.3         | 2.65        | -           | 2.38           | 7.25       | 9.54         | 1.09             | 2.18       | 2.95        | 4.78                  | 9.55        | 12.96        | 3.33        | 6.1          | A++        |
|               |             | 7K+7K+12K   | 2.1                   | 2.1         | 3.35        | -           | 2.45           | 7.55       | 9.74         | 1.12             | 2.23       | 3.02        | 4.9                   | 9.81        | 13.26        | 3.38        | 6.1          | A++        |
|               |             | 7K+7K+18K   | 1.8                   | 1.8         | 4.05        | -           | 2.44           | 7.65       | 9.73         | 1.22             | 2.25       | 3.02        | 5.37                  | 9.89        | 13.25        | 3.4         | 6.1          | A++        |
|               |             | 7K+9K+9K    | 2.05                  | 2.55        | 2.55        | -           | 2.35           | 7.15       | 9.41         | 1.07             | 2.15       | 2.91        | 4.71                  | 9.42        | 12.78        | 3.33        | 6.1          | A++        |
|               |             | 7K+9K+12K   | 1.9                   | 2.3         | 3.1         | -           | 2.36           | 7.3        | 9.42         | 1.08             | 2.16       | 2.92        | 4.74                  | 9.48        | 12.82        | 3.38        | 6.1          | A++        |
|               |             | 7K+9K+18K   | 1.6                   | 1.95        | 3.9         | -           | 2.36           | 7.45       | 9.41         | 1.18             | 2.19       | 2.92        | 5.19                  | 9.61        | 12.82        | 3.4         | 6.1          | A++        |
|               |             | 7K+12K+12K  | 1.8                   | 2.8         | 2.8         | -           | 2.36           | 7.4        | 9.41         | 1.18             | 2.18       | 2.92        | 5.19                  | 9.57        | 12.82        | 3.4         | 6.1          | A++        |
|               |             | 7K+12K+18K  | 1.6                   | 2.4         | 3.6         | -           | 2.46           | 7.6        | 9.8          | 1.03             | 2.25       | 3.04        | 4.51                  | 9.87        | 13.35        | 3.38        | 6.1          | A++        |
|               |             | 9K+9K+9K    | 2.55                  | 2.55        | 2.55        | -           | 2.44           | 7.65       | 9.73         | 1.12             | 2.25       | 3.02        | 4.9                   | 9.89        | 13.25        | 3.4         | 6.1          | A++        |
|               |             | 9K+9K+12K   | 2.5                   | 2.5         | 2.85        | -           | 2.47           | 7.85       | 9.85         | 1.24             | 2.32       | 3.05        | 5.43                  | 10.2        | 13.41        | 3.38        | 6.1          | A++        |
|               |             | 9K+9K+18K   | 2.3                   | 2.3         | 3.4         | -           | 2.56           | 8          | 10.18        | 1.28             | 2.36       | 3.16        | 5.61                  | 10.34       | 13.86        | 3.4         | 6.1          | A++        |
|               | 4 units     | 9K+12K+12K  | 2.2                   | 2.9         | 2.9         | -           | 2.54           | 8          | 10.11        | 1.27             | 2.36       | 3.13        | 5.57                  | 10.37       | 13.76        | 3.39        | 6.1          | A++        |
|               |             | 9K+12K+18K  | 2.1                   | 2.8         | 3.25        | -           | 2.57           | 8.15       | 10.23        | 1.28             | 2.41       | 3.17        | 5.64                  | 10.59       | 13.92        | 3.38        | 6.1          | A++        |
|               |             | 12K+12K+12K | 2.75                  | 2.75        | 2.75        | -           | 2.64           | 8.25       | 10.49        | 1.32             | 2.43       | 3.25        | 5.79                  | 10.67       | 14.29        | 3.4         | 6.1          | A++        |
|               |             | 12K+12K+18K | 2.6                   | 2.6         | 3.2         | -           | 2.66           | 8.4        | 10.61        | 1.33             | 2.48       | 3.29        | 5.85                  | 10.89       | 14.45        | 3.39        | 6.1          | A++        |
|               |             | 7K+7K+7K+7K | <b>2.05</b>           | <b>2.05</b> | <b>2.05</b> | <b>2.05</b> | <b>2.3</b>     | <b>8.2</b> | <b>10.55</b> | <b>1.2</b>       | <b>2.3</b> | <b>3</b>    | <b>5.3</b>            | <b>10.2</b> | <b>13.33</b> | <b>3.57</b> | <b>6.1</b>   | <b>A++</b> |
|               |             | 7K+7K+7K+9K | 2                     | 2           | 2           | 2.3         | 2.32           | 8.3        | 10.68        | 1.23             | 2.34       | 3.09        | 5.39                  | 10.27       | 13.55        | 3.55        | 6.1          | A++        |
| 7K+7K+7K+12K  | 1.9         | 1.9         | 1.9                   | 2.7         | 2.35        | 8.4         | 10.81          | 1.24       | 2.37         | 3.12             | 5.46       | 10.39       | 13.72                 | 3.55        | 6.1          | A++         |              |            |
| 7K+7K+7K+18K  | 1.8         | 1.8         | 1.8                   | 3.1         | 2.38        | 8.5         | 10.94          | 1.26       | 2.39         | 3.16             | 5.52       | 10.52       | 13.88                 | 3.55        | 6.1          | A++         |              |            |
| 7K+7K+9K+9K   | 1.9         | 1.9         | 2.3                   | 2.3         | 2.35        | 8.4         | 10.81          | 1.24       | 2.37         | 3.12             | 5.46       | 10.39       | 13.72                 | 3.55        | 6.1          | A++         |              |            |
| 7K+7K+9K+12K  | 1.8         | 1.8         | 2.25                  | 2.6         | 2.37        | 8.45        | 10.87          | 1.25       | 2.38         | 3.14             | 5.49       | 10.45       | 13.8                  | 3.55        | 6.1          | A++         |              |            |
| 7K+7K+9K+18K  | 1.7         | 1.7         | 2.15                  | 3           | 2.39        | 8.55        | 11             | 1.26       | 2.41         | 3.18             | 5.55       | 10.58       | 13.96                 | 3.55        | 6.1          | A++         |              |            |
| 7K+7K+12K+12K | 1.7         | 1.7         | 2.55                  | 2.55        | 2.38        | 8.5         | 10.94          | 1.26       | 2.39         | 3.16             | 5.52       | 10.52       | 13.88                 | 3.55        | 6.1          | A++         |              |            |
| 7K+9K+9K+9K   | 1.85        | 2.2         | 2.2                   | 2.2         | 2.37        | 8.45        | 10.87          | 1.25       | 2.38         | 3.14             | 5.49       | 10.45       | 13.8                  | 3.55        | 6.1          | A++         |              |            |
| 7K+9K+9K+12K  | 1.8         | 2.05        | 2.05                  | 2.6         | 2.38        | 8.5         | 10.94          | 1.26       | 2.39         | 3.16             | 5.52       | 10.52       | 13.88                 | 3.55        | 6.1          | A++         |              |            |
| 7K+9K+12K+12K | 1.8         | 1.9         | 2.25                  | 2.6         | 2.39        | 8.55        | 11             | 1.26       | 2.41         | 3.18             | 5.55       | 10.58       | 13.96                 | 3.55        | 6.1          | A++         |              |            |
| 9K+9K+9K+9K   | 2.13        | 2.13        | 2.13                  | 2.13        | 2.39        | 8.52        | 10.96          | 1.26       | 2.4          | 3.               |            |             |                       |             |              |             |              |            |

# HOT PERFORMANCE

| Model         | No. unit    | Combination  | HOT Operation         |             |             |             |                |            |             |                  |             |            |                       |             |              |             | Class Energ |           |
|---------------|-------------|--------------|-----------------------|-------------|-------------|-------------|----------------|------------|-------------|------------------|-------------|------------|-----------------------|-------------|--------------|-------------|-------------|-----------|
|               |             |              | Partial capacity Room |             |             |             | Total capacity |            |             | Total absorption |             |            | Total absorption 230V |             |              | COP         |             | SCOP      |
|               |             |              | kW                    |             |             |             | kW             |            |             | kW               |             |            | Ampere                |             |              | W/W         |             | W/W       |
|               |             |              | A                     | B           | C           | D           | Min            | Nom        | Max         | Min              | Nom         | Max        | Min                   | Nom         | Max          | Nom         |             | Nom       |
| 18-2          | 1 unit      | 7K           | 2.3                   | -           | -           | -           | 1.65           | 2.3        | 4.1         | 0.72             | 0.63        | 1.59       | 3.17                  | 2.78        | 6.98         | 3.63        | 4           | A+        |
|               |             | 9K           | 2.8                   | -           | -           | -           | 1.75           | 2.8        | 4.25        | 0.77             | 0.76        | 1.57       | 3.36                  | 3.33        | 6.89         | 3.69        | 4           | A+        |
|               |             | 12K          | 3.65                  | -           | -           | -           | 2.1            | 3.65       | 4.55        | 0.82             | 0.95        | 1.57       | 3.59                  | 4.14        | 6.88         | 3.86        | 4           | A+        |
|               | 2 units     | 7K+7K        | 2.35                  | 2.35        | -           | -           | 2.55           | 4.7        | 5.45        | 0.77             | 1.13        | 1.8        | 3.36                  | 4.99        | 7.89         | 4.14        | 4           | A+        |
|               |             | 7K+9K        | 2.1                   | 2.7         | -           | -           | 2.55           | 4.8        | 5.5         | 0.77             | 1.16        | 1.81       | 3.36                  | 5.1         | 7.96         | 4.14        | 4           | A+        |
|               |             | 7K+12K       | 2                     | 3.3         | -           | -           | 2.7            | 5.3        | 5.95        | 0.79             | 1.36        | 1.8        | 3.49                  | 5.96        | 7.88         | 3.91        | 4           | A+        |
|               |             | 9K+9K        | <b>2.6</b>            | <b>2.6</b>  | -           | -           | <b>2.55</b>    | <b>5.2</b> | <b>5.95</b> | <b>0.8</b>       | <b>1.25</b> | <b>1.8</b> | <b>3.49</b>           | <b>5.5</b>  | <b>7.88</b>  | <b>4.16</b> | <b>4</b>    | <b>A+</b> |
|               |             | 9K+12K       | 2.3                   | 3.1         | -           | -           | 2.7            | 5.4        | 6           | 0.79             | 1.41        | 1.78       | 3.49                  | 6.2         | 7.82         | 3.83        | 4           | A+        |
|               |             | 12K+12K      | 2.8                   | 2.8         | -           | -           | 2.7            | 5.6        | 6.05        | 0.79             | 1.46        | 1.79       | 3.49                  | 6.43        | 7.88         | 3.82        | 4           | A+        |
|               |             | 18K+18K      | 3.35                  | 3.35        | -           | -           | 2.5            | 6.7        | 7.6         | 0.83             | 1.58        | 2.71       | 3.65                  | 6.94        | 11.9         | 4.24        | 4           | A+        |
| 24-3          | 2 units     | 7K+7K        | 2.4                   | 2.4         | -           | -           | 2.4            | 4.8        | 6.7         | 0.82             | 1.19        | 2.49       | 3.58                  | 5.21        | 10.94        | 4.05        | 4           | A+        |
|               |             | 7K+9K        | 2.2                   | 2.8         | -           | -           | 2.4            | 5          | 6.7         | 0.82             | 1.22        | 2.49       | 3.58                  | 5.35        | 10.94        | 4.11        | 4           | A+        |
|               |             | 7K+12K       | 2.15                  | 3.35        | -           | -           | 2.5            | 5.5        | 7.1         | 0.83             | 1.34        | 2.48       | 3.65                  | 5.87        | 10.89        | 4.12        | 4           | A+        |
|               |             | 7K+18K       | 1.8                   | 4.5         | -           | -           | 2.4            | 6.3        | 7.1         | 0.84             | 1.5         | 2.48       | 3.71                  | 6.59        | 10.89        | 4.2         | 4           | A+        |
|               |             | 9K+9K        | 2.8                   | 2.8         | -           | -           | 2.5            | 5.6        | 7.6         | 0.83             | 1.35        | 2.71       | 3.65                  | 5.93        | 11.9         | 4.14        | 4           | A+        |
|               |             | 9K+12K       | 2.5                   | 3.4         | -           | -           | 2.5            | 5.9        | 7.6         | 0.83             | 1.41        | 2.71       | 3.65                  | 6.22        | 11.9         | 4.17        | 4           | A+        |
|               |             | 9K+18K       | 2.15                  | 4.3         | -           | -           | 2.5            | 6.45       | 7.6         | 0.83             | 1.53        | 2.71       | 3.65                  | 6.73        | 11.9         | 4.21        | 4           | A+        |
|               |             | 12K+12K      | 3.25                  | 3.25        | -           | -           | 2.5            | 6.5        | 7.6         | 0.83             | 1.54        | 2.71       | 3.65                  | 6.77        | 11.9         | 4.22        | 4           | A+        |
|               |             | 12K+18K      | 2.7                   | 3.9         | -           | -           | 2.5            | 6.6        | 7.6         | 0.83             | 1.56        | 2.71       | 3.65                  | 6.87        | 11.9         | 4.22        | 4           | A+        |
|               |             | 18K+18K      | 3.35                  | 3.35        | -           | -           | 2.5            | 6.7        | 7.6         | 0.83             | 1.58        | 2.71       | 3.65                  | 6.94        | 11.9         | 4.24        | 4           | A+        |
|               | 3 units     | 7K+7K+7K     | 2.3                   | 2.3         | 2.3         | -           | 3.5            | 6.9        | 8.6         | 0.95             | 1.63        | 2.8        | 4.18                  | 7.14        | 12.32        | 4.24        | 4           | A+        |
|               |             | 7K+7K+9K     | 2.3                   | 2.3         | 2.4         | -           | 3.5            | 7          | 8.6         | 0.95             | 1.65        | 2.8        | 4.18                  | 7.24        | 12.32        | 4.24        | 4           | A+        |
|               |             | 7K+7K+12K    | 2                     | 2           | 3.4         | -           | 3.5            | 7.4        | 8.6         | 0.95             | 1.73        | 2.8        | 4.18                  | 7.59        | 12.32        | 4.28        | 4           | A+        |
|               |             | 7K+7K+18K    | 1.7                   | 1.7         | 4.1         | -           | 3.5            | 7.5        | 8.6         | 0.95             | 1.75        | 2.8        | 4.18                  | 7.69        | 12.32        | 4.28        | 4           | A+        |
|               |             | 7K+9K+9K     | <b>2</b>              | <b>2.5</b>  | <b>2.5</b>  | -           | <b>3.5</b>     | <b>7</b>   | <b>8.6</b>  | <b>0.95</b>      | <b>1.65</b> | <b>2.8</b> | <b>4.18</b>           | <b>7.2</b>  | <b>12.32</b> | <b>4.24</b> | <b>4</b>    | <b>A+</b> |
|               |             | 7K+9K+12K    | 1.85                  | 2.35        | 3.1         | -           | 3.5            | 7.3        | 8.6         | 0.95             | 1.71        | 2.8        | 4.18                  | 7.52        | 12.32        | 4.26        | 4           | A+        |
|               |             | 7K+9K+18K    | 1.6                   | 1.95        | 3.9         | -           | 3.5            | 7.45       | 8.6         | 0.95             | 1.74        | 2.8        | 4.18                  | 7.63        | 12.32        | 4.29        | 4           | A+        |
|               |             | 7K+12K+12K   | 1.8                   | 2.8         | 2.8         | -           | 3.5            | 7.4        | 8.6         | 0.95             | 1.73        | 2.8        | 4.18                  | 7.59        | 12.32        | 4.28        | 4           | A+        |
|               |             | 9K+9K+9K     | 2.4                   | 2.4         | 2.4         | -           | 3.5            | 7.2        | 8.6         | 0.95             | 1.69        | 2.8        | 4.18                  | 7.42        | 12.32        | 4.26        | 4           | A+        |
|               |             | 9K+9K+12K    | 2.25                  | 2.25        | 3           | -           | 3.5            | 7.5        | 8.6         | 0.95             | 1.75        | 2.8        | 4.18                  | 7.69        | 12.32        | 4.28        | 4           | A+        |
| 9K+9K+18K     | 1.9         | 1.9          | 3.7                   | -           | 3.5         | 7.5         | 8.6            | 0.95       | 1.75        | 2.8              | 4.18        | 7.69       | 12.32                 | 4.28        | 4            | A+          |             |           |
| 9K+12K+12K    | 2.1         | 2.7          | 2.7                   | -           | 3.5         | 7.5         | 8.6            | 0.95       | 1.75        | 2.8              | 4.18        | 7.69       | 12.32                 | 4.28        | 4            | A+          |             |           |
| 12K+12K+12K   | 2.5         | 2.5          | 2.5                   | -           | 3.5         | 7.5         | 8.6            | 0.95       | 1.75        | 2.8              | 4.18        | 7.69       | 12.32                 | 4.28        | 4            | A+          |             |           |
| 28-4          | 2 units     | 7K+7K        | 2.5                   | 2.5         | -           | -           | 2.5            | 5          | 7.78        | 1.04             | 1.57        | 2.76       | 4.43                  | 6.91        | 11.74        | 3.18        | 4           | A+        |
|               |             | 7K+9K        | 2.3                   | 2.8         | -           | -           | 2.45           | 5.1        | 7.62        | 1.02             | 1.58        | 2.7        | 4.34                  | 6.94        | 11.5         | 3.23        | 4           | A+        |
|               |             | 7K+12K       | 2.15                  | 3.45        | -           | -           | 2.55           | 5.6        | 8.06        | 1.03             | 1.73        | 2.68       | 4.39                  | 7.6         | 11.43        | 3.24        | 4           | A+        |
|               |             | 7K+18K       | 1.9                   | 4.6         | -           | -           | 2.48           | 6.5        | 8.17        | 1.06             | 1.97        | 2.72       | 4.5                   | 8.65        | 11.58        | 3.3         | 4           | A+        |
|               |             | 9K+9K        | 2.8                   | 2.8         | -           | -           | 2.5            | 5.6        | 8.48        | 1.01             | 1.72        | 2.88       | 4.31                  | 7.55        | 12.27        | 3.26        | 4           | A+        |
|               |             | 9K+12K       | 2.6                   | 3.4         | -           | -           | 2.54           | 6          | 8.62        | 1.03             | 1.83        | 2.93       | 4.38                  | 8.04        | 12.47        | 3.28        | 4           | A+        |
|               |             | 9K+18K       | 2.25                  | 4.4         | -           | -           | 2.58           | 6.65       | 8.74        | 1.04             | 2.01        | 2.97       | 4.44                  | 8.83        | 12.65        | 3.31        | 4           | A+        |
|               |             | 12K+12K      | 3.3                   | 3.3         | -           | -           | 2.54           | 6.6        | 8.61        | 1.03             | 1.99        | 2.92       | 4.37                  | 8.74        | 12.46        | 3.32        | 4           | A+        |
|               |             | 12K+18K      | 2.75                  | 3.95        | -           | -           | 2.54           | 6.7        | 8.6         | 1.03             | 2.02        | 2.92       | 4.37                  | 8.87        | 12.45        | 3.32        | 4           | A+        |
|               |             | 18K+18K      | 3.45                  | 3.45        | -           | -           | 2.57           | 6.9        | 8.73        | 1.04             | 2.07        | 2.96       | 4.44                  | 9.09        | 12.63        | 3.33        | 4           | A+        |
|               | 3 units     | 7K+7K+7K     | 2.3                   | 2.3         | 2.3         | -           | 3.5            | 6.9        | 9.59        | 1.16             | 2.07        | 2.97       | 4.93                  | 9.09        | 12.67        | 3.33        | 4           | A+        |
|               |             | 7K+7K+9K     | 2.3                   | 2.3         | 2.65        | -           | 3.63           | 7.25       | 9.93        | 1.2              | 2.18        | 3.08       | 5.11                  | 9.55        | 13.13        | 3.33        | 4           | A+        |
|               |             | 7K+7K+12K    | 2.1                   | 2.1         | 3.35        | -           | 3.57           | 7.55       | 9.79        | 1.18             | 2.24        | 3.03       | 5.03                  | 9.86        | 12.93        | 3.36        | 4           | A+        |
|               |             | 7K+7K+18K    | 1.8                   | 1.8         | 4.05        | -           | 3.57           | 7.65       | 9.78        | 1.18             | 2.27        | 3.03       | 5.03                  | 9.99        | 12.93        | 3.36        | 4           | A+        |
|               |             | 7K+9K+9K     | 2.05                  | 2.55        | 2.55        | -           | 3.58           | 7.15       | 9.8         | 1.18             | 2.15        | 3.04       | 5.04                  | 9.42        | 12.95        | 3.33        | 4           | A+        |
|               |             | 7K+9K+12K    | 1.9                   | 2.3         | 3.1         | -           | 3.5            | 7.3        | 9.59        | 1.16             | 2.18        | 2.97       | 4.93                  | 9.57        | 12.67        | 3.35        | 4           | A+        |
|               |             | 7K+9K+18K    | 1.6                   | 1.95        | 3.9         | -           | 3.5            | 7.45       | 9.59        | 1.16             | 2.21        | 2.97       | 4.93                  | 9.71        | 12.67        | 3.37        | 4           | A+        |
|               |             | 7K+12K+12K   | 1.8                   | 2.8         | 2.8         | -           | 3.5            | 7.4        | 9.59        | 1.16             | 2.2         | 2.97       | 4.93                  | 9.66        | 12.67        | 3.36        | 4           | A+        |
|               |             | 7K+12K+18K   | 1.6                   | 2.4         | 3.6         | -           | 3.59           | 7.6        | 9.85        | 1.19             | 2.26        | 3.05       | 5.06                  | 9.92        | 13.02        | 3.36        | 4           | A+        |
|               |             | 9K+9K+9K     | 2.55                  | 2.55        | 2.55        | -           | 3.72           | 7.65       | 10.19       | 1.21             | 2.25        | 3.11       | 5.16                  | 9.88        | 13.26        | 3.4         | 4           | A+        |
|               | 9K+9K+12K   | 2.5          | 2.5                   | 2.85        | -           | 3.66        | 7.85           | 10.04      | 1.16        | 2.24             | 2.99        | 4.96       | 9.85                  | 12.75       | 3.5          | 4           | A+          |           |
|               | 9K+9K+18K   | 2.3          | 2.3                   | 3.4         | -           | 3.73        | 8              | 10.23      | 1.17        | 2.25             | 3.01        | 4.98       | 9.9                   | 12.81       | 3.55         | 4           | A+          |           |
|               | 9K+12K+12K  | 2.2          | 2.9                   | 2.9         | -           | 3.73        | 8              | 10.23      | 1.15        | 2.22             | 2.96        | 4.91       | 9.76                  | 12.63       | 3.6          | 4           | A+          |           |
|               | 9K+12K+18K  | 2.1          | 2.8                   | 3.25        | -           | 3.8         | 8.15           | 10.42      | 1.16        | 2.23             | 2.98        | 4.94       | 9.81                  | 12.69       | 3.65         | 4           | A+          |           |
|               | 12K+12K+12K | 2.75         | 2.75                  | 2.75        | -           | 3.85        | 8.25           | 10.55      | 1.16        | 2.23             | 2.97        | 4.93       | 9.79                  | 12.67       | 3.7          | 4           | A+          |           |
|               | 12K+12K+18K | 2.6          | 2.6                   | 3.2         | -           | 3.92        | 8.4            | 10.74      | 1.16        | 2.24             | 2.99        | 4.95       | 9.84                  | 12.73       | 3.75         | 4           | A+          |           |
|               | 4 units     | 7K+7K+7K+7K  | <b>2.05</b>           | <b>2.05</b> | <b>2.05</b> | <b>2.05</b> | <b>4.1</b>     | <b>8.2</b> | <b>10.7</b> | <b>1.1</b>       | <b>2.1</b>  | <b>2.9</b> | <b>4.69</b>           | <b>9.32</b> | <b>12.36</b> | <b>3.9</b>  | <b>4</b>    | <b>A+</b> |
|               |             | 7K+7K+7K+9K  | 2                     | 2           | 2           | 2.3         | 4.07           | 8.3        | 10.83       | 1.11             | 2.13        | 2.94       | 4.74                  | 9.33        | 12.51        | 3.91        | 4           | A+        |
|               |             | 7K+7K+7K+12K | 1.9                   | 1.9         | 1.9         | 2.7         | 4.03           | 8.4        | 10.96       | 1.13             | 2.15        | 2.97       | 4.8                   | 9.45        | 12.66        | 3.9         | 4           | A+        |
|               |             | 7K+7K+7K+18K | 1.8                   | 1.8         | 1.8         | 3.1         | 4              | 8.5        | 11.09       | 1.14             | 2.18        | 3.01       | 4.86                  | 9.56        | 12.81        | 3.9         | 4           | A+        |
| 7K+7K+9K+9K   |             | 1.9          | 1.9                   | 2.3         | 2.3         | 3.95        | 8.4            | 10.96      | 1.13        | 2.15             | 2.97        | 4.8        | 9.43                  | 12.64       | 3.91         | 4           | A+          |           |
| 7K+7K+9K+12K  |             | 1.8          | 1.8                   | 2.25        | 2.6         | 3.97        | 8.45           | 11.03      | 1.13        | 2.16             | 2.98        | 4.82       | 9.49                  | 12.72       | 3.91         | 4           | A+          |           |
| 7K+7K+9K+18K  |             | 1.7          | 1.7                   | 2.15        | 3           | 4.02        | 8.55           | 11.16      | 1.15        | 2.19             | 3.02        | 4.88       | 9.6                   | 12.87       | 3.91         | 4           | A+          |           |
| 7K+7K+12K+12K |             | 1.7          | 1.7                   | 2.55        | 2.55        | 4           | 8.5            | 11.09      | 1.14        | 2.17             | 3           | 4.85       | 9.55                  | 12.79       | 3.91         | 4           | A+          |           |
| 7K+9K+9K+9K   |             | 1.85         | 2.2                   | 2.2         | 2.2         | 3.97        | 8.45           | 11.03      | 1.13        | 2.16             | 2.98        | 4.82       | 9.48                  | 12.7        | 3.92         | 4           | A+          |           |
| 7K+9K+9K+12K  |             | 1.8          | 2.05                  | 2.05        | 2.6         | 4           | 8.5            | 11.09      | 1.14        | 2.17             | 3           | 4.85       | 9.54                  | 12.78       | 3.92         | 4           | A+          |           |
| 7K+9K+12K+12K | 1.8         | 1.9          | 2.25                  | 2.6         | 4.02        | 8.55        | 11.25          | 1.14       | 2.18        | 3.02             | 4.87        | 9.59       | 12.85                 | 3.92        | 4            | A+          |             |           |
| 9K+9K+9K+9K   | 2.13        | 2.13         | 2.13                  | 2.13        | 4           | 8.52        | 11.31          | 1.14       | 2.17        | 3                | 4.85        | 9.55       | 12.79                 | 3.          |              |             |             |           |

# COMMERCIAL 3.2

## COMMERCIAL MONOSPLIT SERIES DC INVERTER IN HEAT PUMP

**NEW**





### > GENERAL CHARACTERISTICS:

New range of Mono split units for Commercial applications able to cover the different types of installation, both in the centre of the room with circular air diffusion, NCS cassettes, in recessed version with low average useful heads up to 160 Pa, ducted MIDAS, and exposed in vertical floor standing installation or horizontal hung, AIR floor/ceiling.

The units are available in the heat pump version with external units equipped with DC Inverter technology with low environmental impact coolant R32.

#### EXTERNAL UNIT

mod. 18-24-36-42




mod. 48-60

| U.E. | L mm | P mm | H mm |
|------|------|------|------|
| 18   | 800  | 315  | 545  |
| 24   | 900  | 350  | 700  |
| 36   | 970  | 395  | 808  |
| 42   | 970  | 395  | 808  |
| 48   | 940  | 370  | 1325 |
| 60   | 940  | 370  | 1325 |



#### AIR FLOOR STANDING/CEILING INSTALLED INTERNAL UNIT

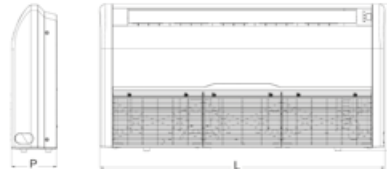

| U.I. | L mm | H mm | P mm |
|------|------|------|------|
| 18   | 929  |      |      |
| 24   | 929  |      |      |
| 36   | 1280 | 660  | 205  |
| 42   | 1280 |      |      |
| 48   | 1631 |      |      |
| 60   | 1631 |      |      |


#### MIDAS DUCTED INTERNAL UNIT



| DUCTED | L mm | H mm | P mm |
|--------|------|------|------|
| 18     | 1000 |      |      |
| 24     | 1000 |      |      |
| 36     | 1400 | 245  | 700  |
| 42     | 1400 |      |      |
| 48     | 1400 |      |      |
| 60     | 1400 |      |      |



#### INTERNAL UNIT NCS CASSETTES

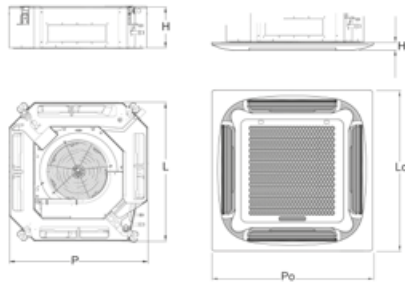

| CASSETTE | L mm | P mm | H mm | Lo mm | Po mm | Ho mm |
|----------|------|------|------|-------|-------|-------|
| 18       | 570  | 570  | 260  | 650   | 650   |       |
| 24       | 835  | 835  | 250  | 950   | 950   |       |
| 36       | 835  | 835  | 290  | 950   | 950   |       |
| 42       | 835  | 835  | 290  | 950   | 950   | 55    |
| 48       | 835  | 835  | 290  | 950   | 950   |       |
| 60       | 835  | 835  | 290  | 950   | 950   |       |



#### GENERAL



#### STANDARD SUPPLY



#### STANDARD FUNCTIONS



#### SPECIAL FUNCTIONS





## EXTERNAL UNITS

- Use of Inverter technology for greater energy savings and environmental comfort. Use of R-32 coolant which reduces the environmental impact by 68% compared to R-410A. Coolant flow control with electronic expansion valve.
- Single-phase (mod. 18, 24, 36 and 42) and three-phase (mod.48 and 60) power supply. Lighter and more compact outdoor units, mono-fan for powers up to 12 Kw, for easy installation on site. Coolant lines up to 30m (mod.18), up to 50m (mod.24) up to 65m (mod.36 - 60).



| EXTERNAL UNIT                               |                     | 18              | 24              | 36              | 42              | 48              | 60              |
|---|---------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Power supply                                | V-Ph-Hz             | 230/1/50        |                 |                 |                 | 400/3/50        |                 |
| Coolant                                     | Type                | R32             |                 |                 |                 |                 |                 |
|   | Load kg             | 1.16            | 1.4             | 2.54            | 2.54            | 3.6             | 3.6             |
| Equivalent CO <sub>2</sub> tonnes           | tCO <sub>2</sub> eq | 0.78            | 0.95            | 1.71            | 1.71            | 2.43            | 2.43            |
| Air flow rate                               | m <sup>3</sup> /h   | 2600            | 3750            | 4000            | 4200            | 7200            | 7200            |
| Sound pressure                              | dB(A)               | 55              | 58              | 57              | 57              | 60              | 60              |
| Sound power                                 | dB(A)               | 64              | 67              | 66              | 66              | 70              | 70              |
| Liquid line fittings                        | mm (inch)           | 6.35 (1/4)      | 9.52 (3/8)      | 9.52 (3/8)      | 9.52 (3/8)      | 9.52 (3/8)      | 9.52 (3/8)      |
| Gas line fittings                           | mm (inch)           | 12.7 (1/2)      | 15.88 (5/8)     | 15.88 (5/8)     | 15.88 (5/8)     | 19.05 (3/4)     | 19.05 (3/4)     |
| Maximum line length                         | m                   | 30              | 50              | 65              | 65              | 65              | 65              |
| Maximum gradient                            | m                   | 20              | 25              | 30              | 30              | 30              | 30              |
| Field of application outdoor air (cold/hot) | °C                  | -15-52 / -15-24 |                 |                 |                 |                 |                 |
| Packaging dimensions L x D x H              | mm                  | 920x400x620     | 1020x430x770    | 1105x495x895    | 1105x495x895    | 1080x430x1440   | 1080x430x1440   |
| Net weight                                  | kg                  | 37              | 51              | 72              | 72              | 100             | 100             |
| Gross weight                                | kg                  | 40              | 55              | 76              | 76              | 108             | 108             |
| <b>CODE</b>                                 |                     | <b>2C04900F</b> | <b>2C04901F</b> | <b>2C04902F</b> | <b>2C04903F</b> | <b>2C04904F</b> | <b>2C04905F</b> |

## AIR FLOOR STANDING/CEILING INSTALLED INTERNAL UNITS

- Available in 6 different capacities. Compact unit with a thickness of only 205 mm Possibility of horizontal ceiling or vertical wall installation.
- Infrared remote control provided by standard with generous display for complete control of the unit.




| INTERNAL UNIT                                 |                             |                 |                 | 18                    | 24                    | 36                    | 42              | 48           | 60           |
|---|-----------------------------|-----------------|-----------------|-----------------------|-----------------------|-----------------------|-----------------|--------------|--------------|
| ERP Class                                     | (Class E - A <sup>+</sup> ) | when cold       |                 | <b>A<sup>++</sup></b> | <b>A<sup>++</sup></b> | <b>A<sup>++</sup></b> | -               | -            | -            |
|   | (Class E - A <sup>+</sup> ) | when hot        |                 | <b>A<sup>+</sup></b>  | <b>A<sup>+</sup></b>  | <b>A<sup>+</sup></b>  | -               | -            | -            |
| Cold Operation                                | Capacity                    | Nom             | W               | 5000                  | 7000                  | 10550                 | 12100           | 14000        | 16000        |
|   |                             | Min-Max         | W               | 1530 - 5600           | 2160 - 8200           | 2900 - 13000          | 2900 - 13500    | 4760 - 16500 | 4760 - 17500 |
|   | Absorption                  | Nom             | W               | 1630                  | 2250                  | 3400                  | 4500            | 5300         | 6110         |
|   |                             | Min-Max         | W               | 470 - 2300            | 670 - 3560            | 710 - 4710            | 710 - 5100      | 1710 - 6700  | 1710 - 6800  |
|   | Current                     | Nom             | A               | 7.16                  | 9.88                  | 15                    | 19.5            | 23           | 26.5         |
|   |                             | Min-Max         | A               | 2.25 - 10.1           | 3.21 - 15.63          | 3.2 - 21.5            | 3.2 - 22.3      | 7.4 - 28.6   | 7.4 - 29.1   |
| Dehumidification                              | Nom                         | l/h             | 2.1             | 2.5                   | 3.6                   | 4.6                   | 5.6             | 7            |              |
| EER ref. Standard EN14511                     | Nom                         | W/W             | 3.07            | 3.11                  | 3.1                   | 2.69                  | 2.64            | 2.62         |              |
| SEER ref. Standard EN14825                    | Nom                         | W/W             | 6.1             | 6.3                   | 6.1                   | 6.1                   | 6.1             | 6.1          |              |
| PdesigC                                       |                             | kW              | 5               | 7                     | 10.55                 | 11.5                  | -               | -            |              |
| Hot Operation                                 | Capacity                    | Nom             | W               | 5600                  | 8000                  | 11150                 | 13500           | 16000        | 17000        |
|   |                             | Min-Max         | W               | 1400 - 6200           | 1980 - 9300           | 2600 - 13500          | 2600 - 15000    | 4780 - 16150 | 4780 - 18500 |
|   | Absorption                  | Nom             | W               | 1730                  | 2100                  | 3450                  | 4600            | 5500         | 5900         |
|   |                             | Min-Max         | W               | 460 - 2250            | 650 - 3620            | 470 - 4130            | 470 - 4530      | 1710 - 6800  | 1710 - 7100  |
|   | Current                     | Nom             | A               | 7.6                   | 9.22                  | 15.5                  | 20              | 23.9         | 25.6         |
|   |                             | Min-Max         | A               | 2.2 - 9.88            | 3.11 - 15.9           | 2.43 - 18             | 2.43 - 19.7     | 7.4 - 29.1   | 7.4 - 29.5   |
| COP ref. Standard EN14511                     | Nom                         | W/W             | 3.24            | 3.81                  | 3.23                  | 2.93                  | 2.91            | 2.88         |              |
| SCOP ref. Standard EN14825                    | Nom                         | W/W             | 4.1             | 4.1                   | 4                     | 4                     | 4               | 4            |              |
| PdesigH                                       |                             | kW              | 5               | 6.8                   | 10                    | 10                    | -               | -            |              |
| Reference climatic zone ref. Standard EN14825 | Type                        | A (temperate)   |                 |                       |                       |                       |                 |              |              |
| Equilibrium temp T <sub>biv</sub>             | °C                          | -7              |                 |                       |                       |                       |                 |              |              |
| Maximum time for use T <sub>ol</sub>          | °C                          | -10             |                 |                       |                       |                       |                 |              |              |
| Air flow rate                                 | m <sup>3</sup> /h           | 900-730-650     | 1300-1050-920   | 1800-1550-1350        | 1800-1550-1350        | 1900-1600-1400        | 1900-1600-1400  |              |              |
| Sound pressure                                | dB(A)                       | 45-40-34        | 47-43-38        | 53-50-47              | 53-50-47              | 54-51-48              | 54-51-48        |              |              |
| Max sound power                               | dB(A)                       | 56              | 57              | 63                    | 63                    | 64                    | 64              |              |              |
| Net / Gross weight                            | kg                          | 25 - 28         | 32 - 38         | 44 - 50               | 44 - 50               | 44 - 50               | 44 - 50         |              |              |
| <b>CODE</b>                                   |                             | <b>2C04930F</b> | <b>2C04931F</b> | <b>2C04932F</b>       | <b>2C04933F</b>       | <b>2C04934F</b>       | <b>2C04935F</b> |              |              |

## INTERNAL UNIT NCS CASSETTES

- Available in 6 different capacities.
- 360° air delivery for better distribution of the temperature in the room
- Integrated condensation discharge pump
- Set-up for fresh air intake or delivery into adjacent room through ducts
- Infrared remote control provided by standard with generous display for complete control of the unit.



| INTERNAL UNIT  |                 |           |                 | 18                | 24                 | 36                 | 42                 | 48                 | 60           |
|--|-----------------|-----------|-----------------|-------------------|--------------------|--------------------|--------------------|--------------------|--------------|
| ERP Class  | (Class E - A++) | when cold |                 | A++               | A++                | A++                | -                  | -                  | -            |
|  | (Class E - A++) | when hot  |                 | A+                | A+                 | A+                 | -                  | -                  | -            |
| Cold Operation   | Capacity        | Nom       | W               | 5000              | 7000               | 10550              | 12100              | 14000              | 16000        |
|  |                 | Min-Max   | W               | 1530 - 5600       | 2160 - 8200        | 2900 - 13000       | 2900 - 13500       | 4760 - 16500       | 4760 - 17500 |
|  | Absorption      | Nom       | W               | 1630              | 2180               | 3400               | 4500               | 5200               | 6100         |
|  |                 | Min-Max   | W               | 470 - 2300        | 670 - 3560         | 710 - 4710         | 710 - 5100         | 1710 - 6700        | 1710 - 6800  |
|  | Current         | Nom       | A               | 7.16              | 9.57               | 15                 | 19.5               | 22.6               | 26.5         |
|  |                 | Min-Max   | A               | 2.25 - 10.1       | 3.21 - 15.63       | 3.2 - 21.5         | 3.2 - 22.3         | 7.4 - 28.6         | 7.4 - 29.1   |
| Dehumidification   | Nom             | l/h       | 2.1             | 2.5               | 3.6                | 4.6                | 5.6                | 7                  |              |
| EER ref. Standard EN14511  | Nom             | W/W       | 3.07            | 3.21              | 3.1                | 2.69               | 2.69               | 2.62               |              |
| SEER ref. Standard EN14825   | Nom             | W/W       | 6.3             | 6.5               | 6.1                | 6.1                | 6.1                | 6.1                |              |
| PdesigC  |                 | kW        | 5               | 7                 | 10.5               | 11.5               | -                  | -                  |              |
| Hot Operation  | Capacity        | Nom       | W               | 5600              | 8000               | 11150              | 13500              | 16000              | 17000        |
|  |                 | Min-Max   | W               | 1400 - 6200       | 1980 - 9300        | 2600 - 13500       | 2600 - 15000       | 4780 - 16150       | 4780 - 18500 |
|  | Absorption      | Nom       | W               | 1730              | 2100               | 3450               | 4600               | 5400               | 5800         |
|  |                 | Min-Max   | W               | 460 - 2250        | 650 - 3620         | 470 - 4130         | 470 - 4530         | 1710 - 6800        | 1710 - 7100  |
|  | Current         | Nom       | A               | 7.6               | 9.22               | 15.5               | 20                 | 23.4               | 25.2         |
|  |                 | Min-Max   | A               | 2.2 - 9.88        | 3.11 - 15.9        | 2.43 - 18          | 2.43 - 19.7        | 7.4 - 29.1         | 7.4 - 29.5   |
| COP ref. Standard EN14511  | Nom             | W/W       | 3.24            | 3.81              | 3.23               | 2.93               | 2.96               | 2.93               |              |
| SCOP ref. Standard EN14825   | Nom             | W/W       | 4               | 4.2               | 4                  | 4                  | 4                  | 4                  |              |
| PdesigH  |                 | kW        | 5               | 6.8               | 10                 | 10                 | -                  | -                  |              |
| Reference climatic zone ref. Standard EN14825                                      |                 | Type      | A (temperate)   |                   |                    |                    |                    |                    |              |
| Equilibrium temp Tbiv  |                 | °C        | -7              |                   |                    |                    |                    |                    |              |
| Maximum time for use Tol   |                 | °C        | -10             |                   |                    |                    |                    |                    |              |
| Air flow rate  | Max-Med-Min     | m³/h      | 700 - 600 - 530 | 1300 - 1050 - 950 | 1800 - 1550 - 1350 | 1800 - 1550 - 1350 | 1950 - 1750 - 1500 | 1950 - 1750 - 1500 |              |
| Sound pressure   | Max-Med-Min     | dB(A)     | 45 - 44 - 36    | 47 - 43 - 38      | 51 - 48 - 45       | 51 - 48 - 45       | 52 - 50 - 48       | 52 - 50 - 48       |              |
| Max sound power  |                 | dB(A)     | 56              | 57                | 62                 | 62                 | 65                 | 65                 |              |
| Unit net / gross weight  |                 | kg        | 17 / 20         | 24 / 27.5         | 26.5 / 30.5        | 26.5 / 30.5        | 31 / 35            | 31 / 35            |              |
| Grid net / gross weight  |                 | kg        | 2.2 / 3.7       | 5.3 / 7.8         | 5.3 / 7.8          | 5.3 / 7.8          | 5.3 / 7.8          | 5.3 / 7.8          |              |
| <b>CODE</b>  |                 |           | <b>2C04910F</b> | <b>2C04911F</b>   | <b>2C04912F</b>    | <b>2C04913F</b>    | <b>2C04914F</b>    | <b>2C04915F</b>    |              |
|  |                 |           |                 |                   |                    |                    |                    |                    |              |
| <b>Universal grid to be associated</b>   |                 |           | <b>S</b>        |                   |                    | <b>L</b>           |                    |                    |              |
| <b>CODE</b>  |                 |           | <b>2C0491AF</b> |                   |                    | <b>2C0491BF</b>    |                    |                    |              |

## DUCTABLE MIDAS INTERNAL UNITS

- Available in 6 different capacities.
- Compact unit with a thickness of only 245 mm
- The head available up to 160 Pa makes it possible to use the unit with flexible ducting systems of various lengths.
- Possibility of setting a different useful head through wired control to optimise the flow rate of the air delivered into the room.
- Flexible installation: the direction of air intake can be changed from the rear side to the bottom.
- Wall-hung panel provided by standard with generous display for complete control of the unit.



| INTERNAL UNIT                                 |                             |                   | 18              | 24              | 36              | 42              | 48              | 60              |            |
|---|-----------------------------|-------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------|
| ERP Class                                     | (Class E - A <sup>+</sup> ) | when cold         | A <sup>++</sup> | A <sup>++</sup> | A <sup>++</sup> | -               | -               | -               |            |
|   | (Class E - A <sup>+</sup> ) | when hot          | A <sup>+</sup>  | A <sup>+</sup>  | A <sup>+</sup>  | -               | -               | -               |            |
| Cold Operation                                | Capacity                    | Nom               | W               | 5000            | 7000            | 10550           | 12100           | 14000           | 16000      |
|   |                             | Min-Max           | W               | 1530-5600       | 2160-8200       | 2900-13000      | 2900-13500      | 4760-16500      | 4760-17500 |
|   | Absorption                  | Nom               | W               | 1550            | 2120            | 3400            | 4430            | 5000            | 5880       |
|   |                             | Min-Max           | W               | 470-2300        | 670-3560        | 710-4710        | 710-5100        | 1710-6600       | 1710-6700  |
|   | Current                     | Nom               | A               | 6.73            | 9.22            | 15              | 19              | 21.7            | 26         |
|   |                             | Min-Max           | A               | 2.25-10.1       | 3.21-15.63      | 3.2-21.5        | 3.2-22.3        | 7.4-28.6        | 7.4-29.1   |
| Dehumidification                              | Nom                         | l/h               | 2               | 2.7             | 3.9             | 4.7             | 7               | 8               |            |
| EER ref. Standard EN14511                     | Nom                         | W/W               | 3.23            | 3.3             | 3.1             | 2.73            | 2.8             | 2.72            |            |
| SEER ref. Standard EN14825                    | Nom                         | W/W               | 6.2             | 6.1             | 6.1             | 6.1             | 6.1             | 6.1             |            |
| PdesigC                                       |                             | kW                | 5.2             | 7               | 10.3            | 10.5            | \               | \               |            |
| Hot Operation                                 | Capacity                    | Nom               | W               | 5600            | 8000            | 11150           | 13500           | 16000           | 17000      |
|   |                             | Min-Max           | W               | 1400-6200       | 1980-9300       | 2600-13500      | 2600-15000      | 4780-16150      | 4780-18500 |
|   | Absorption                  | Nom               | W               | 1490            | 2120            | 3450            | 4600            | 5000            | 5600       |
|   |                             | Min-Max           | W               | 460-2250        | 650-3620        | 470-4130        | 470-4530        | 1710-6700       | 1710-6800  |
|   | Current                     | Nom               | A               | 6.5             | 9.23            | 15.5            | 20              | 21.7            | 24.4       |
|   |                             | Min-Max           | A               | 2.2-9.88        | 3.11-15.90      | 2.43-18.00      | 2.43-19.70      | 7.4-29.10       | 7.4-29.50  |
| COP ref. Standard EN14511                     | Nom                         | W/W               | 3.76            | 3.77            | 3.23            | 2.93            | 3.2             | 3.04            |            |
| SCOP ref. Standard EN14825                    | Nom                         | W/W               | 4               | 4               | 4.1             | 4.1             | 4               | 4               |            |
| PdesigH                                       |                             | kW                | 4.7             | 7               | 8.6             | 8.6             | \               | \               |            |
| Reference climatic zone ref. Standard EN14825 |                             | Type              | A (temperate)   |                 |                 |                 |                 |                 |            |
| Equilibrium temp Tbiv                         |                             | °C                | -7              |                 |                 |                 |                 |                 |            |
| Maximum time for use Tol                      |                             | °C                | -10             |                 |                 |                 |                 |                 |            |
| Air flow rate                                 | Max-Med-Min                 | m <sup>3</sup> /h | 1150-960-840    | 1400-1190-980   | 1900-1600-1400  | 1900-1600-1400  | 2300-2000-1700  | 2300-2000-1700  |            |
| Standard useful pressure (available)          |                             | Pa                | 25(0-160)       | 25(0-160)       | 37(0-160)       | 37(0-160)       | 50(0-160)       | 50(0-160)       |            |
| Sound pressure                                | Max-Med-Min                 | dB(A)             | 43-41-40        | 44-41-39        | 44-41-39        | 44-41-39        | 52-49-47        | 52-49-47        |            |
| Sound power                                   | Max                         | dB(A)             | 53              | 55              | 55              | 55              | 69              | 69              |            |
| Net / Gross weight                            |                             | kg                | 31 / 37         | 32 / 38         | 42 / 48         | 42 / 48         | 46 / 52         | 46 / 52         |            |
| <b>CODE</b>                                   |                             |                   | <b>2C04920F</b> | <b>2C04921F</b> | <b>2C04922F</b> | <b>2C04923F</b> | <b>2C04924F</b> | <b>2C04925F</b> |            |

## CONTROLS

There are two types of controls: wired and infrared. Depending on the units, one of the two is provided as standard. Using the controllers in addition to setting all of the typical functions which are generally run by the user, through specific functions, you can configure procedures that make machine installation easier (useful head available for ductable units) or functions for cleaning the units, or more.

**THE WIRED CONTROL IS STANDARD WITH:**  
- ducted MIDAS units



**THE REMOTE CONTROL IS STANDARD WITH:**  
- NCS cassette units  
- AIR floor standing/ceiling installed units



## FIELD OF APPLICATION

The units can operate in the following temperature ranges:


| OPERATING MODE | PARAMETER                      |      | INTERNAL SIDE |     | EXTERNAL SIDE |     |
|----------------|--------------------------------|------|---------------|-----|---------------|-----|
|                |                                |      | B.S           | B.U | B.S           | B.U |
| Cooling        | Maximum intake air temperature | (°C) | 32            | 23  | 52            | \   |
|                | Minimum intake air temperature | (°C) | 16            | 15  | -15           | \   |
| Heating        | Maximum intake air temperature | (°C) | 32            | \   | 24            | 18  |
|                | Minimum intake air temperature | (°C) | 16            | \   | -15           | -14 |

## TABLE OF COMBINATIONS

| REQUIRED INTERNAL UNITS |              |           |                        |        |
|-------------------------|--------------|-----------|------------------------|--------|
| SIZE                    | POWER SUPPLY | TYPE      |                        |        |
|                         |              | Cassettes | Floor standing/Ceiling | Ducted |
| 18                      | 230-1-50     | X         | X                      | X      |
| 24                      |              | X         | X                      | X      |
| 36                      |              | X         | X                      | X      |
| 42                      |              | X         | X                      | X      |
| 48                      | 400-3-50     | X         | X                      | X      |
| 60                      |              | X         | X                      | X      |

## COOLING CONNECTION LIMITS

Cooling connections to the units are allowed within the limits stated below:

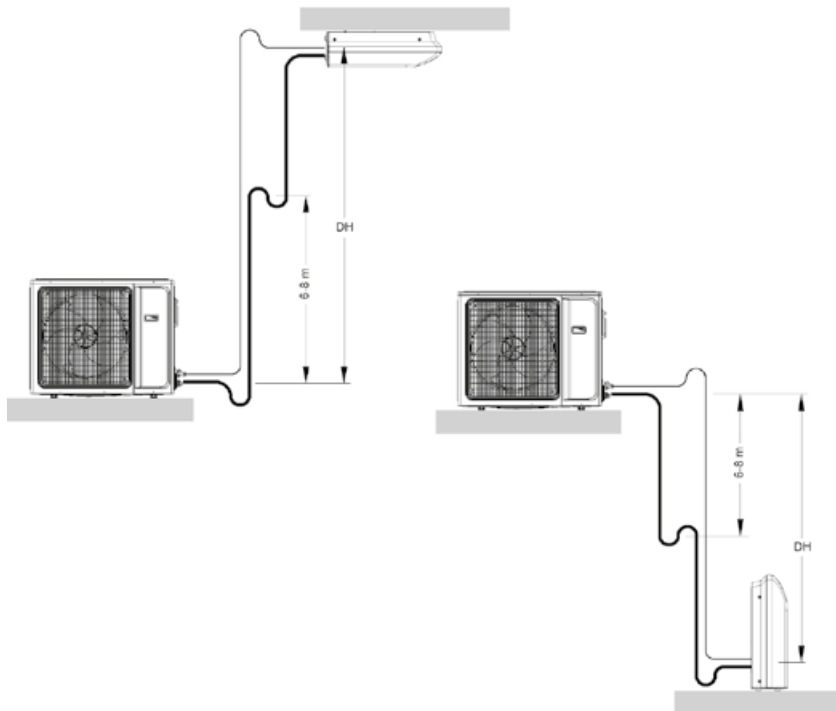

| MODEL                                  |                      |     | 18   | 24   | 36   | 42   | 48   | 60   |
|--|----------------------|-----|------|------|------|------|------|------|
| Diameter                               | Liquid line fittings | "   | 1/4" | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" |
|  | Gas line fittings    | "   | 1/2" | 5/8" | 5/8" | 5/8" | 3/4" | 3/4" |
| Maximum line length                    |                      | m   | 30   | 50   | 65   | 65   | 65   | 65   |
| Maximum gradient DH                    |                      | m   | 20   | 25   | 30   | 30   | 30   | 30   |
| Length with standard load              |                      | m   | 5    | 5    | 5    | 5    | 5    | 5    |
| Coolant                                | Type                 |     | R32  |      |      |      |      |      |
|  | Load                 | Kg  | 1.16 | 1.4  | 2.54 | 2.54 | 3.6  | 3.6  |
| Additional amount of coolant per meter |                      | g/m | 20   | 50   | 50   | 50   | 50   | 50   |

# ASTER S SINGLE SPLIT INVERTER REVERSIBLE AIR CONDITIONER




## > GENERAL CHARACTERISTICS:

- Ecological refrigerant R410A
- Energy Efficiency Class Level A++ / A+ (EU Reg. 626/2011)
- Indoor units with large LED display
- Equipped with inverter technology DC
- Outdoor units including covers on connection valve and soundproof lining
- Standard washable filter
- Automatic restart in the event of power failure
- Night-time operating mode / Automatic operation mode / Daily ON/OFF timer
- Rust-proof treatment on outdoor units

### EXTERNAL UNIT



### INTERNAL UNIT



| MODEL | L mm | H mm | D mm |
|-------|------|------|------|
| 9     | 792  | 279  | 195  |
| 12    | 850  | 291  | 203  |
| 18    | 972  | 302  | 224  |
| 22    | 1081 | 327  | 248  |

| MODEL | L mm | H mm | D mm |
|-------|------|------|------|
| 9     | 762  | 540  | 257  |
| 12    | 762  | 540  | 257  |
| 18    | 890  | 700  | 340  |
| 22    | 890  | 700  | 340  |



| MODELS   |                         |        | 9                     | 12                    | 18                    | 22                      |
|--|-------------------------|--------|-----------------------|-----------------------|-----------------------|-------------------------|
| ERP Class  | Cooling                 |        | A++                   | A++                   | A++                   | A++                     |
|  | Heating                 |        | A+                    | A+                    | A+                    | A+                      |
| Power supply                                       |                         | V-f-Hz | 230-1-50              |                       |                       |                         |
| Cooling capacity <sup>(1)</sup>                    | Nom-Min-Max             | W      | 2600-400-3300         | 3500-550-4000         | 5130-1000-6700        | 6450-1400-7000          |
| Total power input in cooling mode <sup>(1)</sup>   | Nom-Min-Max             | W      | 805-150-1430          | 1085-180-1560         | 1580-320-2460         | 2000-380-2800           |
| Nominal current in cooling <sup>(1)</sup>          |                         | A      | 3,6                   | 4,8                   | 7,0                   | 8,9                     |
| Dehumidification <sup>(1)</sup>                    |                         | l/h    | 0,8                   | 1,4                   | 1,8                   | 2,4                     |
| EER ref. Standard EN14511 (nominal) <sup>(1)</sup> |                         | W/W    | 3,23                  | 3,23                  | 3,25                  | 3,23                    |
| SEER ref. Standard EN14825                         |                         | W/W    | 6,15                  | 6,15                  | 6,12                  | 6,12                    |
| PdesigH  |                         | kW     | 2,6                   | 3,5                   | 5,1                   | 6,4                     |
| Heating capacity <sup>(2)</sup>                    | Nom-Min-Max             | W      | 2800-400-4100         | 3650-600-5130         | 5270-1100-6800        | 6600-1500-7900          |
| Total power input in heating mode <sup>(2)</sup>   | Nom-Min-Max             | W      | 755-180-1550          | 985-220-1650          | 1420-350-2300         | 1780-400-2500           |
| Nominal current in heating <sup>(2)</sup>          |                         | A      | 3,3                   | 4,4                   | 6,3                   | 7,9                     |
| COP ref. Standard EN14511 (nominal) <sup>(2)</sup> |                         | W/W    | 3,71                  | 3,71                  | 3,71                  | 3,71                    |
| SCOPref. Standard EN14825                          |                         | W/W    | 4,00                  | 4,00                  | 4,00                  | 4,00                    |
| Climatic zone of reference ref. Standard en14825   |                         | Type   | A (average)           |                       |                       |                         |
| PdesigH  |                         | kW     | 2,6                   | 3,0                   | 4,1                   | 5,2                     |
| Indoor unit air flow rate                          | S-Max / Max / Med / Min | m³/h   | 530 / 490 / 430 / 330 | 660 / 540 / 460 / 330 | 850 / 720 / 610 / 520 | 1150 / 1050 / 950 / 850 |
| Sound pressure level indoor unit <sup>(3)</sup>    | S-Max / Max / Med / Min | dB(A)  | 39 / 36 / 32 / 26     | 42 / 39 / 33 / 26     | 46 / 42 / 39 / 36     | 48 / 45 / 42 / 39       |
| Outdoor unit air flow rate                         |                         | m³/h   | 1800                  | 1800                  | 3300                  | 3300                    |
| Sound pressure level outdoor unit <sup>(3)</sup>   |                         | dB(A)  | 52                    | 53                    | 56                    | 60                      |
| Liquid / Gas connections diameter                  |                         | inch   | 1/4 - 3/8             | 1/4 - 3/8             | 1/4 - 1/2             | 1/4 - 5/8               |
| Maximum length of refrigerant lines                |                         | m      | 20                    | 20                    | 25                    | 25                      |
| Maximum height difference                          |                         | m      | 10                    | 10                    | 10                    | 10                      |
| Indoor / Outdoor unit net weight                   |                         | Kg     | 9,5 / 29              | 10,5 / 30             | 14 / 43               | 16,5 / 43,5             |
| CODE   | INTERNAL UNIT           |        | 2C0A601F              | 2C0A602F              | 2C0A603F              | 2C0A604F                |
|  | EXTERNAL UNIT           |        | 2C0A621F              | 2C0A622F              | 2C0A623F              | 2C0A624F                |

(1) Outdoor air temp = 35°C B.S. - Room temperature = 27°C B.S. / 19°C B.U. - (2) Outdoor air temp. = 7°C B.S. - Room air temperature = 20°C B.S.

(3) Acoustic pressure measured at 1 meter: O.U. in free field, I.U. in 100 m² room with reverb. time of 0.5 seconds.



# TERMINAL UNITS

KEY OF SYMBOLS 192

## **FAN COIL**

TOP FAN PLUS 208

JOLLY PLUS 2 212

SUPER FAN 216

FCM 218

# TOP FAN <sup>PLUS</sup> FAN COIL WITH CENTRIFUGAL FAN




## > GENERAL CHARACTERISTICS:

- Compact and elegant design obtained by integrating plastic parts and galvanised sheet metal parts, coated with epoxy powder
- Supporting structure made of galvanised steel
- Finned pack heat exchange coil with aluminium fins and copper pipes, brass manifolds specially designed to minimise pressure drops
- Air filter easy to remove and clean, regenerated by washing or blowing
- Fan unit with three-speed motor and aluminium fans
- Wide range of controls both to be installed on the machine and remotely on the wall

| TOP FAN                              |           |                   | 15       | 20       | 30       | 40       | 50       | 60       | 80       | 100      | 120      |
|--------------------------------------|-----------|-------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Total cooling capacity               | max (E)   | W                 | 1.100    | 1.400    | 2.100    | 2.800    | 3.400    | 4.000    | 4.900    | 6.100    | 6.850    |
|                                      | med       | W                 | 980      | 1.200    | 1.850    | 2.450    | 3.010    | 3.550    | 4.350    | 5.500    | 6.100    |
|                                      | min       | W                 | 770      | 950      | 1.450    | 1.900    | 2.390    | 2.800    | 3.600    | 4.400    | 5.000    |
| Sensible cooling capacity            | max (E)   | W                 | 850      | 1.060    | 1.620    | 2.060    | 2.420    | 2.900    | 3.800    | 4.630    | 5.300    |
|                                      | med       | W                 | 735      | 910      | 1.400    | 1.780    | 2.245    | 2.550    | 3.350    | 4.045    | 4.630    |
|                                      | min       | W                 | 560      | 705      | 1.090    | 1.390    | 1.710    | 1.985    | 2.735    | 3.155    | 3.720    |
| Water flow rate (E)                  |           | l/h               | 189      | 241      | 361      | 482      | 585      | 688      | 843      | 1.049    | 1.178    |
| Dehumidification                     | max speed | g/h               | 350      | 490      | 670      | 1.050    | 1.150    | 1.550    | 1.600    | 2.100    | 2.200    |
| Water side pressure drops            | (E)       | kPa               | 3.6      | 5.3      | 9.6      | 15.2     | 13       | 14.6     | 15       | 8        | 10.1     |
| Heat output                          | max       | W                 | 2.800    | 3.650    | 5.500    | 6.500    | 7.800    | 9.400    | 12.500   | 14.900   | 15.800   |
|                                      | med       | W                 | 2.400    | 3.150    | 4.550    | 5.450    | 6.600    | 7.900    | 10.800   | 12.500   | 13.270   |
|                                      | min       | W                 | 1.800    | 2.250    | 3.400    | 4.000    | 4.930    | 5.800    | 8.300    | 9.600    | 10.000   |
| Water flow rate                      |           | l/h               | 241      | 314      | 473      | 559      | 671      | 808      | 1.075    | 1.281    | 1.359    |
| Water side pressure drops            | (E)       | kPa               | 5.1      | 8.6      | 17.6     | 24.2     | 14       | 18.1     | 17.7     | 10.8     | 12.1     |
| Heat output (1)                      | (E)       | W                 | 1.700    | 2.050    | 3.200    | 3.850    | 4.300    | 5.100    | 7.200    | 8.080    | 9.300    |
| Water side pressure drops            | (E)       | kPa               | 4.4      | 6.9      | 14.6     | 23       | 14       | 18       | 19.1     | 9.9      | 12.5     |
| Heat output of additional row        | max (E)   | W                 | 1.250    | 1.650    | 2.550    | 3.150    | 3.690    | 4.100    | 5.050    | 6.200    | 6.950    |
|                                      | med       | W                 | 1.070    | 1.420    | 2.110    | 2.640    | 3.150    | 3.440    | 4.360    | 5.200    | 6.190    |
|                                      | min       | W                 | 860      | 1.130    | 1.750    | 2.150    | 2.320    | 2.820    | 3.480    | 4.250    | 4.800    |
| Water flow rate                      |           | l/h               | 108      | 142      | 219      | 271      | 317      | 353      | 434      | 533      | 598      |
| Water side pressure drops            |           | kPa               | 1.8      | 3        | 8.7      | 13.2     | 4        | 4.1      | 6.88     | 12.8     | 16.1     |
| Thermal power of electric resistance |           | W                 | 800      | 800      | 1.500    | 1.500    | 2.200    | 2.200    | 2.200    | 2.600    | 2.600    |
| Air flow rate                        | max (E)   | m <sup>3</sup> /h | 215      | 280      | 410      | 515      | 615      | 750      | 1.050    | 1.200    | 1.350    |
|                                      | med       | m <sup>3</sup> /h | 170      | 210      | 310      | 400      | 510      | 600      | 850      | 970      | 1.070    |
|                                      | min       | m <sup>3</sup> /h | 110      | 140      | 220      | 290      | 350      | 410      | 570      | 670      | 720      |
| Fans                                 |           | No.               | 1        | 1        | 1        | 1        | 2        | 2        | 2        | 2        | 2        |
| Sound power (E)                      | max       | db(A)             | 43       | 47       | 50       | 54       | 51       | 55       | 62       | 61       | 64       |
|                                      | med       | db(A)             | 39       | 42       | 43       | 48       | 44       | 49       | 57       | 57       | 59       |
|                                      | min       | db(A)             | 32       | 35       | 36       | 41       | 36       | 38       | 48       | 49       | 51       |
| Sound power (2)                      | max       | db(A)             | 34       | 38       | 41       | 45       | 42       | 46       | 53       | 52       | 55       |
|                                      | med       | db(A)             | 30       | 33       | 34       | 39       | 35       | 40       | 48       | 48       | 50       |
|                                      | min       | db(A)             | 23       | 26       | 27       | 32       | 27       | 29       | 39       | 40       | 42       |
| Max motor power                      | (E)       | W                 | 30       | 38       | 33       | 60       | 40       | 70       | 120      | 120      | 160      |
| Main coil connections                | 3R        | Ø                 | 3/4"     | 3/4"     | 3/4"     | 3/4"     | 3/4"     | 3/4"     | 3/4"     | 3/4"     | 3/4"     |
| Additional coil connections          | 1R        | Ø                 | 1/2"     | 1/2"     | 1/2"     | 1/2"     | 1/2"     | 1/2"     | 1/2"     | 1/2"     | 1/2"     |
| Water content                        | coil 3R   | l                 | 0.82     | 0.82     | 1.26     | 1.26     | 1.88     | 1.88     | 1.88     | 2.42     | 2.42     |
|                                      | coil 1R   | l                 | 0.22     | 0.22     | 0.36     | 0.36     | 0.50     | 0.50     | 0.50     | 0.64     | 0.64     |
| Condensate discharge connection      |           | Ø                 | 16       | 16       | 16       | 16       | 16       | 16       | 16       | 16       | 16       |
| CODE                                 | VM-B      |                   | 1ZE2A00P | 1ZE2A01P | 1ZE2A02P | 1ZE2A03P | 2O48000F | 1ZE2A04P | 1ZE2A05P | 1ZE2A06P | 1ZE2A07P |
| CODE                                 | VM-F      |                   | 1ZE2A08P | 1ZE2A09P | 1ZE2A10P | 1ZE2A11P | 2O48100F | 1ZE2A12P | 1ZE2A13P | 1ZE2A14P | 1ZE2A15P |
| CODE                                 | VN        |                   | 1ZE2A16P | 1ZE2A17P | 1ZE2A18P | 1ZE2A19P | 2O68000F | 1ZE2A20P | 1ZE2A21P | 1ZE2A22P | 1ZE2A23P |




**TOP FAN VM-B**  
(AIR INTAKE FROM BELOW)

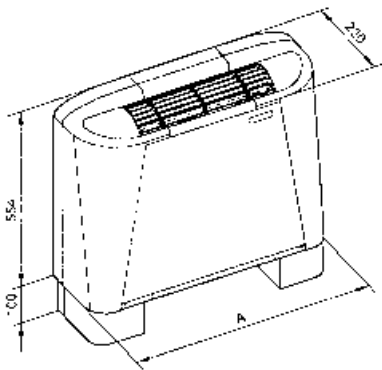


| MODEL   | A mm  | WEIGHT kg |
|---------|-------|-----------|
| 15-20   | 690   | 14        |
| 30-40   | 940   | 20        |
| 50-80   | 1,190 | 27        |
| 100-120 | 1,440 | 34        |

**TOP FAN VM-F**  
(FRONT AIR INTAKE)

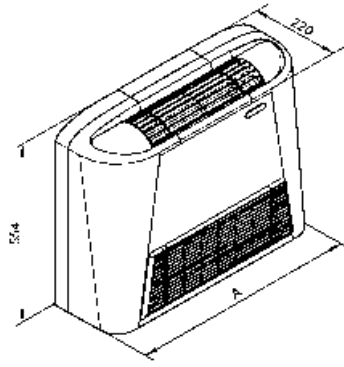

| MODEL   | A mm  | WEIGHT kg |
|---------|-------|-----------|
| 15-20   | 690   | 15        |
| 30-40   | 940   | 21        |
| 50-80   | 1,190 | 28        |
| 100-120 | 1,440 | 36        |

**TOP FAN VN**  
(WITHOUT CASING FOR RECESSED INSTALLATION)

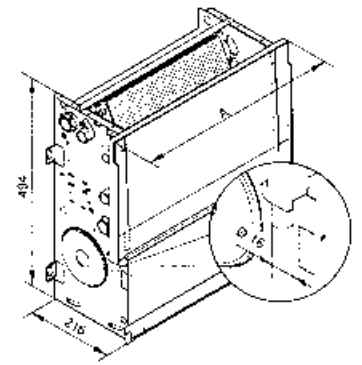

| MODEL   | A mm  | WEIGHT kg |
|---------|-------|-----------|
| 15-20   | 474   | 11        |
| 30-40   | 724   | 15        |
| 50-80   | 974   | 22        |
| 100-120 | 1,224 | 29        |

**TOP FAN PLUS ACCESSORIES**

(THE RIGHT COMBINATION AND THE RELATIVE CODES ARE PROVIDED ON THE FOLLOWING PAGE)

|   |  |   |  |   |
|---|--|---|--|---|
| <p><b>BCV-F</b>      <b>BCO-F</b></p> <p>VERTICAL AND HORIZONTAL TRAY</p> | <p><b>MS-F</b> MOTOR FOR DAMPER</p>            | <p><b>FMP</b>      <b>FAP</b></p> <p>90° INTAKE AND DELIVERY FLANGE</p> | <p><b>FAD</b>      <b>FMD</b></p> <p>STRAIGHT INTAKE AND DELIVERY FLANGE</p>               | <p><b>BS</b> ADDITIONAL 1R COIL</p>             |
| <p><b>GA</b>      <b>GM</b></p> <p>INTAKE GRID AND DELIVERY GRID</p>      | <p><b>VB1</b> ON-OFF VALVE KIT FOR 1R COIL</p> | <p><b>VB3</b> ON-OFF VALVE KIT FOR 3R COIL</p>                          | <p><b>VB1-F</b> 2-WAY VALVE KIT FOR 1R COIL</p>  | <p><b>VB3-F</b> 2-WAY VALVE KIT FOR 3R COIL</p> |
| <p><b>PA</b> FEET</p>   | <p><b>PC</b> REAR CLOSURE PANEL</p>            | <p><b>RE</b> ELECTRIC RESISTANCE</p>                                    | <p><b>TC</b> CONSENT THERMOSTAT<br/>(only for the <b>CMR-F</b> and <b>CM-F</b> SWITCH)</p> | <p><b>SR-F</b> INTAKE DAMPER</p>                |

**NOTES**  
Power supply: 230-1-50 (V-F-Hz)

**Heating**  
- Ambient Air temperature: 20°C  
- intake Water temperature: 70°C, Dt water 10°C at maximum fan speed;  
for medium and minimum fan speed, water flow rate as at maximum speed.  
(1) intake Water temperature: 50°C water flow rate as in cooling.  
- Fan speed: max.

**Cooling**  
- Ambient Air temperature: 27°C D.B. 19°C W.B.  
- intake Water temperature: 7°C, Δt water 5°C at maximum fan speed;  
for medium and minimum fan speed, water flow rate as at maximum speed.  
- Fan speed: max  
(2) Sound pressure in an environment of 100 m³ with reverberation time of 0.5 sec.  
(E): Data declared according to the Eurovent Certification programme

## TABLE OF ACCESSORIES

| CODE     | MODEL  | DESCRIPTION                                  | TOP FAN MODEL |    |    |    |    |    |    |     |     |   |
|----------|--------|--|---------------|----|----|----|----|----|----|-----|-----|---|
|          |        |  | 15            | 20 | 30 | 40 | 50 | 60 | 80 | 100 | 120 |   |
| 19E2A10A | PA-F   | Supporting feet                              | •             | •  | •  | •  | •  | •  | •  | •   | •   | • |
| 19E2A18A | TC-F   | Consent thermostat (*)                       | •             | •  | •  | •  | •  | •  | •  | •   | •   | • |
| 19E2A14A | BCO-F  | Auxiliary horizontal tray                    | •             | •  | •  | •  | •  | •  | •  | •   | •   | • |
| 19E2A15A | BCV-F  | Auxiliary vertical tray                      | •             | •  | •  | •  | •  | •  | •  | •   | •   | • |
| 19E2A16A | VB1-F  | 3-way valve kit for battery 1R               | •             | •  | •  | •  | •  | •  | •  | •   | •   | • |
| 19E2A17A | VB3-F  | 3-way valve kit for battery 3R               | •             | •  | •  | •  | •  | •  | •  | •   | •   | • |
| 20Z19040 | 2VB1-F | 2-way valve kit for battery 1R               | •             | •  | •  | •  | •  | •  | •  | •   | •   | • |
| 20Z19050 | 2VB3-F | 2-way valve kit for battery 3R               | •             | •  | •  | •  | •  | •  | •  | •   | •   | • |
| 19E2A19A | BS-F1  | Additional battery 1 row 15-20               | •             | •  |    |    |    |    |    |     |     |   |
| 19E2A20A | BS-F2  | Additional battery 1 row 30-40               |               |    | •  | •  |    |    |    |     |     |   |
| 19E2A21A | BS-F3  | Additional battery 1 row 50-80               |               |    |    |    | •  | •  | •  |     |     |   |
| 19E2A22A | BS-F4  | Additional battery 1 row 100-120             |               |    |    |    |    |    |    | •   | •   |   |
| 19E2A23A | FMD-F1 | Straight delivery flange 15-20               | •             | •  |    |    |    |    |    |     |     |   |
| 19E2A24A | FMD-F2 | Straight delivery flange 30-40               |               |    | •  | •  |    |    |    |     |     |   |
| 19E2A25A | FMD-F3 | Straight delivery flange 50-80               |               |    |    |    | •  | •  | •  |     |     |   |
| 19E2A26A | FMD-F4 | Straight delivery flange 100-120             |               |    |    |    |    |    |    | •   | •   |   |
| 19E2A27A | FMP-F1 | Perpendicular delivery flange 15-20          | •             | •  |    |    |    |    |    |     |     |   |
| 19E2A28A | FMP-F2 | Perpendicular delivery flange 30-40          |               |    | •  | •  |    |    |    |     |     |   |
| 19E2A29A | FMP-F3 | Perpendicular delivery flange 50-80          |               |    |    |    | •  | •  | •  |     |     |   |
| 19E2A30A | FMP-F4 | Perpendicular delivery flange 100-120        |               |    |    |    |    |    |    | •   | •   |   |
| 19E2A35A | FAD-F1 | Straight intake flange 15-20                 | •             | •  |    |    |    |    |    |     |     |   |
| 19E2A36A | FAD-F2 | Straight intake flange 30-40                 |               |    | •  | •  |    |    |    |     |     |   |
| 19E2A37A | FAD-F3 | Straight intake flange 50-80                 |               |    |    |    | •  | •  | •  |     |     |   |
| 19E2A38A | FAD-F4 | Straight intake flange 100-120               |               |    |    |    |    |    |    | •   | •   |   |
| 19E2A39A | FAP-F1 | Perpendicular intake flange 15-20            | •             | •  |    |    |    |    |    |     |     |   |
| 19E2A40A | FAP-F2 | Perpendicular intake flange 30-40            |               |    | •  | •  |    |    |    |     |     |   |
| 19E2A41A | FAP-F3 | Perpendicular intake flange 50-80            |               |    |    |    | •  | •  | •  |     |     |   |
| 19E2A42A | FAP-F4 | Perpendicular intake flange 100-120          |               |    |    |    |    |    |    | •   | •   |   |
| 20Z15160 | FAI-F1 | Lower intake flange 15-20                    | •             | •  |    |    |    |    |    |     |     |   |
| 20Z15170 | FAI-F2 | Lower intake flange 30-40                    |               |    | •  | •  |    |    |    |     |     |   |
| 20Z15180 | FAI-F3 | Lower intake flange 50-60-80                 |               |    |    |    | •  | •  | •  |     |     |   |
| 20Z15190 | FAI-F4 | Lower intake flange 100-120                  |               |    |    |    |    |    |    | •   | •   |   |
| 19E2A43A | GM-F1  | Delivery grid 15-20                          | •             | •  |    |    |    |    |    |     |     |   |
| 19E2A44A | GM-F2  | Delivery grid 30-40                          |               |    | •  | •  |    |    |    |     |     |   |
| 19E2A45A | GM-F3  | Delivery grid 50-80                          |               |    |    |    | •  | •  | •  |     |     |   |
| 19E2A46A | GM-F4  | Delivery grid 100-120                        |               |    |    |    |    |    |    | •   | •   |   |
| 19E2A47A | GA-F1  | Intake grid 15-20                            | •             | •  |    |    |    |    |    |     |     |   |
| 19E2A48A | GA-F2  | Intake grid 30-40                            |               |    | •  | •  |    |    |    |     |     |   |
| 19E2A49A | GA-F3  | Intake grid 50-80                            |               |    |    |    | •  | •  | •  |     |     |   |
| 19E2A50A | GA-F4  | Intake grid 100-120                          |               |    |    |    |    |    |    | •   | •   |   |
| 19E2A51A | PC-F1  | Rear closing panel 15-20                     | •             | •  |    |    |    |    |    |     |     |   |
| 19E2A52A | PC-F2  | Rear closing panel 30-40                     |               |    | •  | •  |    |    |    |     |     |   |
| 19E2A53A | PC-F3  | Rear closing panel 50-80                     |               |    |    |    | •  | •  | •  |     |     |   |
| 19E2A54A | PC-F4  | Rear closing panel 100-120                   |               |    |    |    |    |    |    | •   | •   |   |
| 19E2A55A | RE-F1  | Kit of electric heating elements 15-20 (1)   | •             | •  |    |    |    |    |    |     |     |   |
| 19E2A56A | RE-F2  | Kit of electric heating elements 30-40 (2)   |               |    | •  | •  |    |    |    |     |     |   |
| 19E2A57A | RE-F3  | Kit of electric heating elements 50-80 (3)   |               |    |    |    | •  | •  | •  |     |     |   |
| 19E2A58A | RE-F4  | Kit of electric heating elements 100-120 (4) |               |    |    |    |    |    |    | •   | •   |   |
| 19E2A63A | SR-F1  | External air intake damper + Grid 15-20      | •             | •  |    |    |    |    |    |     |     |   |
| 19E2A64A | SR-F2  | External air intake damper + Grid 30-40      |               |    | •  | •  |    |    |    |     |     |   |
| 19E2A65A | SR-F3  | External air intake damper + Grid 50-80      |               |    |    |    | •  | •  | •  |     |     |   |
| 19E2A66A | SR-F4  | External air intake damper + Grid 100-120    |               |    |    |    |    |    |    | •   | •   |   |
| 19E2A67A | MS-F   | Motor for damper                             | •             | •  | •  | •  | •  | •  | •  | •   | •   | • |
| 19E2B04A | PSC-F  | Condensation discharge pump kit              | •             | •  | •  | •  | •  | •  | •  | •   | •   | • |

\* To be combined with the switch only (with cabinet and remote) (1) 800 W • (2) 1500 W • (3) 2200 W • (4) 2600 W

## CONTROL PANELS



| MODEL | CM-F     | CMR-F    |
|-------|----------|----------|
| CODE  | 19E2A11B | 19E2A07B |

| MODEL | TE-N     | TER-N    |
|-------|----------|----------|
| CODE  | 20Z29390 | 20Z29400 |

### SWITCH

Comes with:

- Selector for Summer / Off / Winter function
- Selector for Min / Med / Max fan speed

Available in two different versions:

- for cabinet installation **CM-F**
- for remote installation **CMR-F**

### ELECTRONIC THERMOSTAT

Comes with:

- Selector for Off/Summer/Winter/Auto function
- Selector for Min/Med/Max/Auto fan speed
- Knob to set the required temperature

*Note: The selected temperature refers to a value indicated on the knob and not to an offset in relation to a predetermined value.*

For the wall-hung version:

- yellow LED: on when the thermostat is powered
- green LED: on when the cooling function is on
- red LED: on when the heating function is on

Available in two different versions:

- for cabinet installation **TE-N**
- for remote installation **TER-N**



|      |          |
|------|----------|
| CODE | 20Z04470 |
|------|----------|

|      |          |
|------|----------|
| CODE | 20Z0444F |
|------|----------|

|      |          |
|------|----------|
| CODE | 20Z04450 |
|------|----------|

|      |          |
|------|----------|
| CODE | 20Z04460 |
|------|----------|

### 3V POWER MODULE

Module to be installed on each unit, it is able to activate the three fan speeds as well as any hot and cold valves. Through a micro-switch, it is able to manage different system configurations, 2 or 4 pipes or solutions with electric resistance integration. It manages heating and cooling and accepts presence status inputs of the place to be air-conditioned. It receives the settings directly from one of the two Master controllers, either fitted on the machine or remote or from a serial connection with other units belonging to a single group of terminals with Master Slave setting.

### MASTER REMOTE TERMINAL

By means of the remote terminal, which can be installed on the wall and connected with three wires to the power module, it is possible to set all the operating parameters of the units. The display shows the room temperature (via an air probe integrated in the terminal) and the set-point, and features icons for indicating the state (on/off), operating mode (hot/cold/auto), fan speed (1/2/3/auto). Through the 4 keys, it is therefore possible to change the state, the operating mode, the set-point, and the fan speed. The display also shows any operating errors. The terminal is used to control a single fan coil while, through a serial connection, it acts as a master terminal and is able to manage a zone of fan coil units (maximum 16).

### MASTER TERMINAL ON BOARD

It has the same functions as the remote terminal, in this case it must be installed on the machine, under one of the fan coil side panels.

### SLAVE TERMINAL ON BOARD

In the case of Master-Slave application, it allows the slave units to modify some of the settings defined by the Master unit, such as local set-point and fan speed. Other modes are instead reserved for the Master control. The Slave terminal cannot be used to control a single fan coil.

# JOLLY PLUS 2

## TANGENTIAL FAN COILS WITH BRUSHLESS MOTOR



### > GENERAL CHARACTERISTICS:

Jolly tangential fan coils with high efficiency brushless motors. Characterised by a maximum depth of 131 mm and a particularly attractive aesthetic line, they are intended for residential heating and air conditioning applications. The range comes in three versions:

**VM-F** with outer casing for automatic opening of the intake section, **VM-G** with casing and fixed intake grid and **VN** without casing for recessed applications and are **four** sizes available with **cooling capacity from 0.83 kW to 3.34 kW**.

The careful design of the main components, the refined design and the versatility of the product make it suitable for any type of installation in residential, commercial or industrial environments. Installation therefore only requires electrical and hydraulic connections.

### > CONSTRUCTION FEATURES:

**BEARING STRUCTURE:** built with high thickness galvanised sheet metal, it integrates structural and functional plastic elements such as the condensate collection tray and the fan volute.

**THERMAL EXCHANGE BATTERY:** copper tube arranged in staggered rows to increase heat exchange and 2-row aluminium fins locked by the mechanical expansion of the tubes. The manifolds are equipped with air vents, holes for water drainage.

**CONDENSATE COLLECTION TRAY:** made of thermoplastic material to avoid corrosion, for the VN version (supplied as per standard) it allows the machine to be installed in either vertical or horizontal positions.

**FAN MOTOR:** the motor is high efficiency brushless type with rpm control. IT IS mounted on rubber supports to reduce noise transmission on the frame. The adjustment allows both continuous and discrete speed control depending on the selected control model. With the use of an accessory it is possible to discretize the speeds and make them steady so that they can then be guided by standard thermoregulators.

**FAN:** tangential fan coupled directly to the motor, in turn incorporated into an anti-vibration support.

**AIR FILTER:** regenerated through simple washing with water, easily removable, built with polypropylene honeycomb mesh.

**COVERING CABINET (only VM-F and VM-G):** made entirely of epoxy powder-coated steel sheet to ensure high resistance to corrosion. The air diffusion grids are inserted in the upper part. The sides are easily removable for easy installation or access to all internal components. Available in the colour RAL 9003.

**AIR DELIVERY GRILL (only VM-F and VM-G):** built with painted aluminium in the same colour as the casing, it can be turned to allow the air to be directed towards the room or towards the wall.

#### AIR INTAKE GRID

**(VM-F version):** made of extruded aluminium, it is characterised by the two thermo-actuators that open it in parallel with fan start-up. It includes a micro switch that blocks the fan if the grid is removed for the normal filter cleaning procedure.

**(VM-G version):** also in extruded aluminium, it is fastened in the intake section and has fixed fins. It can be taken down to clean the filter.

**HYDRAULIC CONNECTIONS:** The units are equipped with 3/4" EUROKONUS hydraulic connections that offer easy and safe connection. The units are fitted with standard LH connections, with an accessory the connections can be moved to the RH side.

### > CONTROLS

The available controls are divided into:

#### CONTINUOUS CONTROLS

To exploit the potential of the unit, special user terminals have been developed, equipped with continuous adjustment algorithms. This offers stability of the comfort conditions as well as savings linked to fan modulation, as well as a positive impact on the noise level of the unit itself. The terminals, **to be ordered separately as accessories**, are available in **on-board machine version TC Plus** or in **remote wall version TC-R Plus**.

Only for the **TC-R Plus** version, the possibility was developed to connect **up to 31 fan coil units** capable of operating in parallel. This solution is particularly suitable in medium to large sized environments with multiple units installed.

**Associated Functions** Setting the desired temperature / AUTO function on the fan / SILENT function. (limits max. fan speed) / NIGHT TIME function. (limits the max fan speed and changes the set point) / MAX function (forces the maximum fan speed)








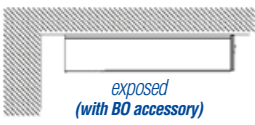

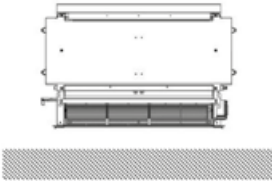

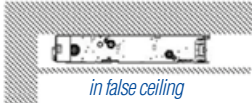
**Other features** Outputs for the control of the ON-OFF 230V valves / Independent dry contacts, for the control of a chiller and a boiler according to the room request / Dry presence contact (window contact or hotel room presence badge)

#### DISCRETE CONTROLS

If you want to use fixed speed control, either an actual command can be installed that can be installed on **TS Plus** to control the room temperature and start the unit, or a board module for interfacing with electric fan motor **K3V Plus** which can be controlled by wall-mounted remote user terminal **TD-3R**, **to be ordered separately as an accessory**, or by a commercial thermostat equipped with three-speed output.

## INSTALLATIONS

Depending on the version, the following installations are possible:

|                     | <i>Wall-hung vertical or centre of the room* on feet</i>                          | <i>Wall-hung vertical</i>   | <i>Vertical in recessed installation</i>   | <i>Ceiling-hung horizontal</i>  |
|---------------------|---|---|--|---|
| <b>Version VM-F</b> |  |  |  |    |
| <b>Version VM-G</b> |  |  |  | <br><i>exposed<br/>(with BO accessory)</i> |
| <b>Version VN</b>   |  |  |  | <br><i>in false ceiling</i>                |

## TECHNICAL DATA


| MODELS   |                   | 20                 | 40                 | 60                 | 80               |
|--|-------------------|--------------------|--------------------|--------------------|------------------|
| <b>PERFORMANCE</b>   |                   |                    |                    |                    |                  |
| Total efficiency / Sensitive efficiency in cooling                     | W                 | 830 / 620          | 1760 / 1270        | 2650 / 1960        | 3340 / 2650      |
| Water flow rate  | l/h               | 143                | 303                | 456                | 574              |
| Water pressure drop  | kPa               | 7.2                | 8.4                | 22.5               | 18.6             |
| Efficiency in heating with 50°C water intake                           | W                 | 1090               | 2350               | 3190               | 4100             |
| Water flow rate (50°C water intake)                                    | l/h               | 142                | 302                | 453                | 573              |
| Water pressure drop (50°C water intake)                                | KPa               | 5.7                | 6.6                | 16.3               | 14.0             |
| Efficiency in heating without ventilation (50°C)                       | W                 | 210                | 247                | 291                | 366              |
| Efficiency in heating with 70°C water intake ΔT 10                     | W                 | 1890               | 3990               | 5470               | 6980             |
| Water flow rate (70°C ΔT 10)   | l/h               | 162                | 343                | 471                | 600              |
| Water pressure drop (70°C ΔT 10)                                       | kPa               | 6.7                | 7.6                | 16.1               | 14.0             |
| Efficiency in heating without ventilation (70°C)                       | W                 | 322                | 379                | 447                | 563              |
| <b>HYDRAULIC CHARACTERISTICS</b>                                       |                   |                    |                    |                    |                  |
| Coil water content   | litres            | 0.47               | 0.8                | 1.13               | 1.46             |
| Maximum operating pressure   | bar               | 10                 | 10                 | 10                 | 10               |
| Hydraulic connections  | inches            | Eurokonus 3/4      | Eurokonus 3/4      | Eurokonus 3/4      | Eurokonus 3/4    |
| <b>AERAILIC DATA</b>   |                   |                    |                    |                    |                  |
| Air flow rate maximum / medium (AUTO mode) / minimum ventilation speed | m <sup>3</sup> /h | 162 / 113 / 55     | 320 / 252 / 155    | 461 / 367 / 248    | 576 / 453 / 370  |
| Available static maximum pressure                                      | Pa                | 10                 | 10                 | 13                 | 13               |
| <b>ELECTRICAL DATA</b>   |                   |                    |                    |                    |                  |
| Supply voltage   | V/ph/Hz           | 230/1/50           | 230/1/50           | 230/1/50           | 230/1/50         |
| Absorbed maximum electric power  | W                 | 12                 | 18                 | 20                 | 26               |
| Maximum absorbed current   | A                 | 0.11               | 0.16               | 0.18               | 0.26             |
| Electric power absorbed at minimum speed                               | W                 | 4                  | 5                  | 5                  | 6                |
| <b>SOUND LEVEL</b>   |                   |                    |                    |                    |                  |
| Sound pressure at maximum / medium / minimum air flow rate             | dB(A)             | 39.4 / 33.2 / 24.2 | 40.2 / 34.1 / 25.3 | 42.2 / 34.4 / 25.6 | 42.5 / 35 / 26.3 |
| <b>WEIGHTS</b>   |                   |                    |                    |                    |                  |
| Net weight of units VM-F / VM-G / VN                                   | Kg                | 17 / 17 / 9        | 20 / 20 / 12       | 23 / 23 / 15       | 26 / 26 / 18     |
| <b>CODE</b>  | <b>VM-G</b>       | <b>2C027M5F</b>    | <b>2C027W5F</b>    | <b>2C027Y5F</b>    | <b>2C027I5F</b>  |
| <b>CODE</b>  | <b>VM-F</b>       | <b>2C02725F</b>    | <b>2C02785F</b>    | <b>2C027E5F</b>    | <b>2C027L5F</b>  |
| <b>CODE</b>  | <b>VN</b>         | <b>2C02705F</b>    | <b>2C02765F</b>    | <b>2C027C5F</b>    | <b>2C027J5F</b>  |

## > DIMENSIONS

### version VM-F and VM-G





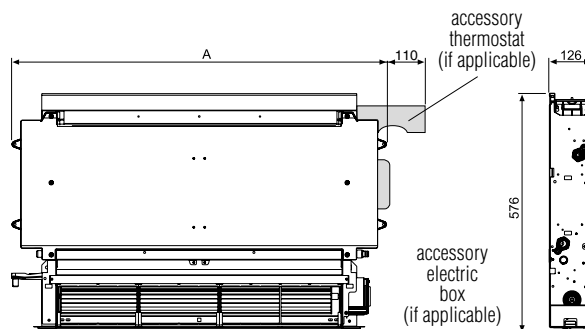





### version VN














| MODEL          | 20  | 40  | 60   | 80   |
|----------------|-----|-----|------|------|
| VM-F/VM-G (mm) | 735 | 935 | 1135 | 1335 |
| VN (mm)        | 479 | 679 | 879  | 1079 |

## > TABLE OF ACCESSORIES

| REMOTE CONTROLS   |  |    |    |    |    |          |  |  |
|-------------------|--|----|----|----|----|----------|--|--|
| MODEL             | DESCRIPTION  | 20 | 40 | 60 | 80 | CODE     |  |  |
| <b>MODULATING</b> |  |    |    |    |    |          |  |  |
| TC PLUS           |  Control for modulating variable speed operation to be installed on the machine. Provided with its own interface card module to install inside the machine   | •  | •  | •  | •  | 2C0276YF |  |  |
| CC-R PLUS         |  Interface card module to install inside the machine mandatorily combined with TC-R PLUS  | •  | •  | •  | •  | 2C0274YF |  |  |
| TC-R PLUS         |  Wall-hung remote continuous thermostat user terminal for modulating variable speed operation, supplied with closing cover for the top side casing of the fan coil. Mandatorily combined with CC-R PLUS                         | •  | •  | •  | •  | 2C0275YF |  |  |
| <b>3-SPEED</b>    |  |    |    |    |    |          |  |  |
| TS PLUS           |  Control for fixed speed operation to be installed on the machine. Provided with its own interface card module to install inside the machine  | •  | •  | •  | •  | 2C0278YF |  |  |
| K3V PLUS          |  Interface card module, supplied with closing cover for the top side casing of the fan coil. To be installed inside the machine, it can be combined with the TD-3R terminal or with a commercial thermostat with 3-speed output | •  | •  | •  | •  | 2C0277YF |  |  |
| TM-3R             |  3-speed wall-hung manual thermostat. It has: selector for Summer/Winter function, Min/Med/Max fan speed selector, selector for turning on/off, knob for setting desired temperature  | •  | •  | •  | •  | 2C0279YF |  |  |


| HYDRAULIC ACCESSORIES |   |    |    |    |    |          |  |  |
|-----------------------|---|----|----|----|----|----------|--|--|
| MODEL                 | DESCRIPTION   | 20 | 40 | 60 | 80 | CODE     |  |  |
| VB 2                  |  2-way valve kit | •  | •  | •  | •  | 2C0212YF |  |  |
| VB 3                  |  3-way valve kit | •  | •  | •  | •  | 2C0213YF |  |  |
| KRE 3/4"              | - 3/4" F Eurokonus fitting conversion kit   | •  | •  | •  | •  | 2C0219YF |  |  |
| KRE 1/2"              | - 1/2" F Eurokonus fitting conversion kit   | •  | •  | •  | •  | 2C021AYF |  |  |
| KLR PLUS              | - "Lh" to "Rh" hydraulic fitting conversion kit   | •  | •  | •  | •  | 2C0238YF |  |  |

## > TABLE OF ACCESSORIES

| ACCESSORIES FOR INSTALLATION                  |   |  |    |    |    |    |          |
|---|---|--|----|----|----|----|----------|
| Version VM-F / VM-G                           |   |  |    |    |    |    |          |
| MODEL   |   | DESCRIPTION  | 20 | 40 | 60 | 80 | CODE     |
| PC 20   |    | Rear closing mod VM-F / VM-G 20  | •  |    |    |    | 2C0270XF |
| PC 40   |   | Rear closing mod VM-F / VM-G 40  |    | •  |    |    | 2C0271XF |
| PC 60   |   | Rear closing mod VM-F / VM-G 60  |    |    | •  |    | 2C0272XF |
| PC 80   |   | Rear closing mod VM-F / VM-G 80  |    |    |    | •  | 2C0273XF |
| PE  |    | Aesthetic feet (to be ordered only with fan coil attached to the wall) | •  | •  | •  | •  | 2C0278XF |
| PA  |    | Supporting feet  | •  | •  | •  | •  | 2C0279XF |
| ACCESSORY FOR HORIZONTAL INSTALLATION OF VM-G |   |  |    |    |    |    |          |
| BO 20   |    | Horizontal installation tray mod. VM-G 20                              | •  |    |    |    | 2C0214XF |
| BO 40   |   | Horizontal installation tray mod. VM-G 40                              |    | •  |    |    | 2C0215XF |
| BO 60   |   | Horizontal installation tray mod. VM-G 60                              |    |    | •  |    | 2C0216XF |
| BO 80   |   | Horizontal installation tray mod. VM-G 80                              |    |    |    | •  | 2C0217XF |
| Version VN                                    |   |  |    |    |    |    |          |
| MODEL   |   | DESCRIPTION  | 20 | 40 | 60 | 80 | CODE     |
| CF 20   |    | Recessed fan coil mod VN 20  | •  |    |    |    | 2C021LWF |
| CF 40   |   | Recessed fan coil mod VN 40  |    | •  |    |    | 2C021MWF |
| CF 60   |   | Recessed fan coil mod VN 60  |    |    | •  |    | 2C021NWF |
| CF 80   |   | Recessed fan coil mod VN 80  |    |    |    | •  | 2C021PWF |
| PCF 20  |    | Aesthetic panel mod VN 20  | •  |    |    |    | 2C021QWF |
| PCF 40  |   | Aesthetic panel mod VN 40  |    | •  |    |    | 2C021RWF |
| PCF 60  |   | Aesthetic panel mod VN 60  |    |    | •  |    | 2C021SWF |
| PCF 80  |   | Aesthetic panel mod VN 80  |    |    |    | •  | 2C021TWF |
| RA 20   |   | Intake fitting mod VN 20   | •  |    |    |    | 2C0210WF |
| RA 40   |   | Intake fitting mod VN 40   |    | •  |    |    | 2C0211WF |
| RA 60   |   | Intake fitting mod VN 60   |    |    | •  |    | 2C0212WF |
| RA 80   |   | Intake fitting mod VN 80   |    |    |    | •  | 2C0213WF |
| PMT 20  |  | Telescopic delivery plenum mod VN 20                                   | •  |    |    |    | 2C0214WF |
| PMT 40  |   | Telescopic delivery plenum mod VN 40                                   |    | •  |    |    | 2C0215WF |
| PMT 60  |   | Telescopic delivery plenum mod VN 60                                   |    |    | •  |    | 2C0216WF |
| PMT 80  |   | Telescopic delivery plenum mod VN 80                                   |    |    |    | •  | 2C0217WF |
| PMP 20  |  | Perpendicular delivery plenum mod VN 20                                | •  |    |    |    | 2C0218WF |
| PMP 40  |   | Perpendicular delivery plenum mod VN 40                                |    | •  |    |    | 2C0219WF |
| PMP 60  |   | Perpendicular delivery plenum mod VN 60                                |    |    | •  |    | 2C021AWF |
| PMP 80  |   | Perpendicular delivery plenum mod VN 80                                |    |    |    | •  | 2C021BWF |
| GM 20   |  | Curved fin delivery grid mod VN 20                                     | •  |    |    |    | 2C021CWF |
| GM 40   |   | Curved fin delivery grid mod VN 40                                     |    | •  |    |    | 2C021DWF |
| GM 60   |   | Curved fin delivery grid mod VN 60                                     |    |    | •  |    | 2C021EWF |
| GM 80   |   | Curved fin delivery grid mod VN 80                                     |    |    |    | •  | 2C021FWF |
| GA 20   |  | Curved fin intake grid mod VN 20                                       | •  |    |    |    | 2C021GWF |
| GA 40   |   | Curved fin intake grid mod VN 40                                       |    | •  |    |    | 2C021HWF |
| GA 60   |   | Curved fin intake grid mod VN 60                                       |    |    | •  |    | 2C021JWF |
| GA 80   |   | Curved fin intake grid mod VN 80                                       |    |    |    | •  | 2C021KWF |

# SUPER FAN

FAN COIL  
WALL-HUNG

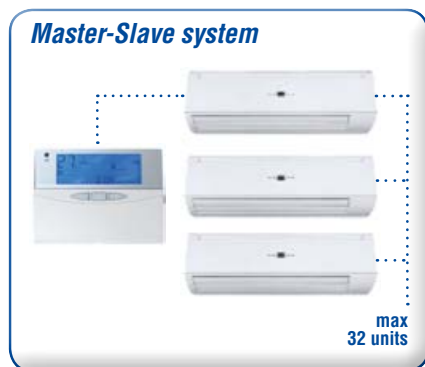

**EC motor**



**Valve 3-way**



**REM-I**



**REM-W**



## > GENERAL CHARACTERISTICS

New series of wall-hung recessed fan coils.

Terminal units for air handling which, in combination with a chiller, a heat pump or a boiler, can be used either in the winter or in the summer.

Particularly flexible, they are suitable for satisfying air climatization and air conditioning requirements for both hotel applications and a wide range of commercial and residential uses.

## > CONSTRUCTION FEATURES

Available in 4 models with **nominal cooling capacity from 0.99 to 4.38 kW** and **nominal heat output from 1.48 to 5.25 kW**, they are suitable for wall installation. The compact dimensions provide a pleasant visual impact. The covering cabinet built with **ABS** guarantees high mechanical characteristics and resistance to aging, and also acts as the supporting structure of the unit. The fan unit consists of a tangential fan with **low consumption EC motor**.

The units are equipped with a display showing the selected operating mode and the set room temperature.

To allow easy installation, all units in the series are equipped with flexible hydraulic hoses; they are also equipped with valves inserted inside the unit and easily accessible from the front panel.

The use of the three-way valve prevents excessive cooling of the unit when the fan stops, and the unpleasant formation of condensation on the casing of the machine.

The units are designed to be connected in **Master-Slave system** to control multiple units through a single controller.

## AVAILABLE CONTROLS

There are two options available for unit control. It is necessary to select at least one of the two. With Master-Slave control, at least one of the two controls must be selected for each installed group of units.

### Infrared remote control REM-I

This sets all of the unit's essential functions. Equipped with an LCD display for easy and immediate display of all the active functions and the various parameters necessary for correct use.


The control comes with a support that fixes it in the most easily accessible position. It offers control up to a distance of 7 m

### Wired control for wall application REM-W

This offers control over all machine parameters and measures the local temperature. With a Master-Slave system, this allows the individual control of each unit. It also acts as a receiver for the infrared remote control.

IT IS equipped with a specific extension that allows installation up to 7 m away from the unit.

| CODE     | DESCRIPTION |
|----------|-------------|
| 2C0730AF | REM-I       |
| 2C0730BF | REM-W       |

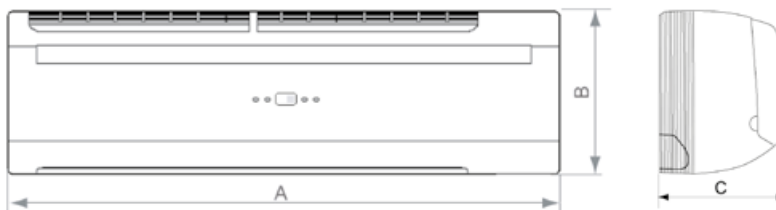

| MODEL | A mm | B mm | C mm | WEIGHT kg |
|-------|------|------|------|-----------|
| 15    | 876  | 300  | 228  | 11        |
| 25    |      |      |      | 12        |
| 35    |      |      |      | 13        |
| 45    |      |      |      | 14        |



| MODEL  |            |                   | 15              | 25              | 35              | 45              |
|--|------------|-------------------|-----------------|-----------------|-----------------|-----------------|
| Total cooling capacity <sup>(1) (E)</sup>            | max        | W                 | 990             | 2050            | 3010            | 3710            |
|  | med        | W                 | 830             | 1630            | 2470            | 3260            |
|  | min        | W                 | 670             | 1360            | 1860            | 2660            |
| Sensible cooling capacity <sup>(1) (E)</sup>         | max        | W                 | 850             | 1520            | 2220            | 2740            |
|  | med        | W                 | 710             | 1200            | 1810            | 2400            |
|  | min        | W                 | 570             | 995             | 1350            | 1940            |
| Dehumidification at the maximum speed <sup>(1)</sup> |            | g/h               | 400             | 700             | 1050            | 1330            |
| Water flow rate <sup>(1)</sup>                       |            | l/h               | 170             | 356             | 521             | 643             |
| Water side pressure drops <sup>(E)</sup>             |            | kPa               | 22.8            | 28.8            | 38.5            | 50              |
| Heat output <sup>(2) (E)</sup>                       | max        | W                 | 1480            | 2640            | 3850            | 4770            |
|  | med        | W                 | 1230            | 2080            | 3140            | 4170            |
|  | min        | W                 | 990             | 1720            | 2340            | 3370            |
| Water flow rate <sup>(2)</sup>                       |            | l/h               | 170             | 356             | 521             | 643             |
| Water side pressure drops <sup>(2) (E)</sup>         |            | kPa               | 18.4            | 22.4            | 35.0            | 45.0            |
| Heat output <sup>(3) (E)</sup>                       | max        | W                 | 2606            | 4355            | 6351            | 7868            |
|  | med        | W                 | 2175            | 3440            | 5190            | 6860            |
|  | min        | W                 | 1740            | 2845            | 3880            | 5550            |
| Water flow rate <sup>(3)</sup>                       |            | l/h               | 224             | 375             | 546             | 677             |
| Water side pressure drops <sup>(3) (E)</sup>         |            | kPa               | 18.1            | 22.0            | 34.0            | 44.1            |
| Power supply   |            | V-F-Hz            | 230-1-50        |                 |                 |                 |
| Air flow rate  | max        | m <sup>3</sup> /h | 370             | 500             | 645             | 880             |
|  | med        | m <sup>3</sup> /h | 290             | 370             | 500             | 740             |
|  | min        | m <sup>3</sup> /h | 220             | 290             | 370             | 570             |
| Sound power <sup>(E)</sup>                           | max        | dB(A)             | 42              | 48              | 54              | 58              |
|  | med        | dB(A)             | 38              | 40              | 43              | 53              |
|  | min        | dB(A)             | 33              | 35              | 40              | 46              |
| Sound power <sup>(4)</sup>                           | max        | dB(A)             | 32              | 38              | 44              | 48              |
|  | med        | dB(A)             | 28              | 30              | 33              | 43              |
|  | min        | dB(A)             | 23              | 25              | 30              | 36              |
| Absorption <sup>(E)</sup>                            | max        | W                 | 13              | 18              | 22              | 30              |
|  | med        | W                 | 10              | 13              | 15              | 20              |
|  | min        | W                 | 6               | 10              | 10              | 13              |
| Apparent absorption                                  | max        | W                 | 22              | 41              | 52              | 94              |
| Motor absorption                                     | max        | A                 | 0.104           | 0.19            | 0.242           | 0.44            |
| Coil water content                                   |            | l                 | 0.26            | 0.38            | 0.72            | 0.93            |
| Hydraulic connections                                | Ø          | "                 | 1/2" F          | 1/2" F          | 1/2" F          | 1/2" F          |
| Condensate discharge connection                      | Ø          | mm                | 16              | 16              | 16              | 16              |
| Valve  | Type       | -                 | 3-way ON-OFF    |                 |                 |                 |
|  | Connection | "                 | 1/2"            | 1/2"            | 1/2"            | 1/2"            |
| <b>CODE</b>  |            |                   | <b>2C07300F</b> | <b>2C07301F</b> | <b>2C07302F</b> | <b>2C07303F</b> |

**NOTES:**

(1) Water 7°C IN- 12°C OUT - Air 27°BS 19°C BU

(2) Water 50°C IN - Same flow rate in cold operation - Air 20°C BS

(3) Water 70°C IN - OUT 60°C - Air 20°C BS

(4) Sound pressure at 1 meter from the unit

(E) Eurovent certified data

Water side pressure drops are included in the valve drops.



**INFRARED REMOTE CONTROLLER**  
(standard)



**WIRED CONTROLLER**  
(optional)



### GENERAL SPECIFICATION

- 2 versions - for 2 pipes plant and for 4 pipes plant
- 4 model available for 2 pipes type and 2 model for 4 pipes type
- New EC motor with low consumptions up to 30% respect to a standard motor
- Controlled by infrared remote controller (standard) and a wired controller (optional)
- Timer setting
- Available function: Heating, Cooling, Dehumidification, Automatic

### CONTROLLER

#### INFRARED REMOTE CONTROLLER (Standard)

This controller is very easy to use and all parameters are under control. The limit transmitting distance of this remote controller is 10 m. Already supplied with the unit.

#### WIRED CONTROLLER (Optional)

This controller is very easy to use and all parameters are under control. In this case, the panel is fixed to the wall and connected to the unit by a wire.

### OPTIONAL ACCESSORIES

The following accessories are available for this category:

#### 3-WAY VALVE KIT (obligatory for operation in the cooling mode)

The three-way valve is not only required to control the ambient temperature, but also to block the flow of chilled water to the coil should the level of condensed water in the tray rise in an abnormal way.

It is obligatory to install this valve if the unit is used for operation in the cooling mode. It avoids excessive cooling when fan is idle, thus preventing the unpleasant formation of condensation inside the machine.

The kit includes copper pipe connections and 3-way valve with ON/OFF electrothermic actuator, suitable for 230V power input. The valve is controlled by main board of the unit.

#### DRIP TRAY

This PVC tray collects and conveys outside condensation from pipe connections and 3-way valve kit (if present).

| MODELS                      |                      |                   | 400          | 600          | 850          | 1500         | 400-4T       | 750-4T       |
|-----------------------------|----------------------|-------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Version                     |                      |                   | 2 pipes      |              |              | 4 pipes      |              |              |
| Power supply                |                      | V-f-Hz            | 230-1-50     |              |              |              |              |              |
| Air Flow                    | Max                  | m <sup>3</sup> /h | 717          | 1133         | 1441         | 1850         | 717          | 1233         |
|                             | Med                  | m <sup>3</sup> /h | 502          | 793          | 1009         | 1295         | 502          | 863          |
|                             | Min                  | m <sup>3</sup> /h | 359          | 567          | 721          | 925          | 359          | 617          |
| Cooling capacity (1)        | Max                  | W                 | 3930         | 5580         | 6840         | 10640        | 2880         | 5180         |
|                             | Med                  | W                 | 3070         | 4350         | 5330         | 8090         | 2190         | 3940         |
|                             | Min                  | W                 | 2480         | 3520         | 4300         | 6600         | 1800         | 3260         |
| Water flow                  |                      | l/h               | 676          | 960          | 1176         | 1830         | 495          | 891          |
| Cooling water pressure drop |                      | kPa               | 12           | 21           | 27           | 34           | 14,5         | 12           |
| Heating Capacity (2)        | Max                  | W                 | 5340         | 7720         | 9370         | 14380        | -            | -            |
|                             | Med                  | W                 | 4000         | 5920         | 7250         | 11290        | -            | -            |
|                             | Min                  | W                 | 3150         | 4500         | 5500         | 8440         | -            | -            |
| Heating Capacity (3)        | Max                  | W                 | -            | -            | -            | -            | 4730         | 7410         |
|                             | Med                  | W                 | -            | -            | -            | -            | 3600         | 5640         |
|                             | Min                  | W                 | -            | -            | -            | -            | 2980         | 4670         |
| Water flow (2)              |                      | m <sup>3</sup> /h | 676          | 960          | 1176         | 1830         | -            | -            |
| Water flow (3)              |                      | m <sup>3</sup> /h | -            | -            | -            | -            | 407          | 637          |
| Heating water pressure drop |                      | kPa               | 10,6         | 22           | 23           | 34           | 29,1         | 42           |
| Power input                 |                      | W                 | 27           | 42           | 70           | 124          | 27           | 50           |
| Sound pressure level        | Max-Med-Min          | dB(A)             | 40 - 36 - 28 | 42 - 33 - 26 | 46 - 36 - 28 | 50 - 40 - 33 | 40 - 36 - 28 | 42 - 34 - 26 |
| Pipe connection             |                      | "                 | 3/4"         | 3/4"         | 3/4"         | 3/4"         | 3/4"         | 3/4"         |
| Pipe connection auxiliary   |                      | "                 | -            | -            | -            | -            | 1/2"         | 1/2"         |
| Net \ Gross weight Body     |                      | Kg                | 16,5/21,5    | 23/28        | 27/33        | 29/34,5      | 17/23        | 28/34        |
| Net \ Gross weight Panel    |                      | Kg                | 2,5/4,5      | 6/9          | 6/9          | 6/9          | 2,5/4,5      | 6/9          |
| CODE                        | FCM                  |                   | 2C097A0F     | 2C097A1F     | 2C097A2F     | 2C097A3F     | 2C097B0F     | 2C097B1F     |
|                             | Cover grille (small) |                   | 2C097AAF     |              | -            |              | 2C097AAF     | -            |
|                             | Cover grille (big)   |                   | -            |              | 2C097BAF     |              | -            | 2C097BAF     |

**NOTE:** (1) Air T=27°C D.B. / 19°C W.B., Water IN/OUT 7°/12°C, design air flow; For medium and low fan speed, water flow as in maximum fan speed mode. (2) Air T=20°C D.B., water inlet temperature 50°C, water flow as in cooling mode. (3) Air T=20°C D.B., water IN/OUT 70°/60°C, design air flow; For medium and low fan speed, water flow as in maximum fan speed mode. (4) Sound pressure level in 100m<sup>2</sup> room with 0.5sec of reverberation time


## ACCESSORIES

| MODELS                                     | 400      | 600      | 850 | 1500     | 400-4T   | 750-4T   |
|--|----------|----------|-----|----------|----------|----------|
| VT1 - 3 way valve for main exchanger       | 20Z19000 | -        | -   | -        | 20Z19000 | -        |
| VT2 - 3 way valve for main exchanger       | -        | 20Z19340 |     |          | -        | -        |
| VT3 - 3 way valve for main exchanger       | -        | -        | -   | -        | -        | 20Z19350 |
| VT4 - 3 way valve for additional exchanger | -        | -        | -   | -        | 20Z19020 | -        |
| VT5 - 3 way valve for additional exchanger | -        | -        | -   | -        | -        | 20Z19360 |
| Drip tray                                  | 2C097FAF | -        | -   | -        | 2C097FAF | -        |
| Drip tray                                  | -        | 2C097GAF | -   | -        | -        | 2C097GAF |
| Wired control                              |          |          |     | 2C097DAF |          |          |
| Centralised control                        |          |          |     | 2C097EAF |          |          |

## OPTION INSTALLATION

### Fresh air flow input

For fresh air flow input there is a pre-cut hole to connect the unit to a circular duct. It is possible to control fresh air flow by an external fan (not included). This fan can be controlled by main board of the unit.



| 4 PIPES MODEL | 400-4 | 750-4            |
|---------------|-------|------------------|
| 2 PIPES MODEL | 400   | 600 - 850 - 1500 |
| Ø             | 65    | 75               |

### Air delivery into an adjacent room


On all sides there are pre-cut hole to connect the unit to adjacent rooms by some ducts.

| 4 PIPES MODEL | 2 PIPES MODEL | A (mm) | B (mm) | Ø (mm) |
|---------------|---------------|--------|--------|--------|
| 400-4         | 400           | -      | -      | 150    |
| -             | 600           | 75     | 160    | -      |
| 750-4         | 850 - 1500    | 95     | 160    | -      |



## DIMENSION

| 4 PIPES MODEL |         | 400-4 | -   | 750-4 |      |
|---------------|---------|-------|-----|-------|------|
| 2 PIPES MODEL |         | 400   | 600 | 850   | 1500 |
| Body          | A (mm)  | 575   | 840 | 840   |      |
|               | B (mm)  | 575   | 840 | 840   |      |
|               | H (mm)  | 260   | 230 | 300   |      |
| Panel         | A1 (mm) | 647   | 950 | 950   |      |
|               | B1 (mm) | 647   | 950 | 950   |      |
|               | H1 (mm) | 50    | 45  | 45    |      |

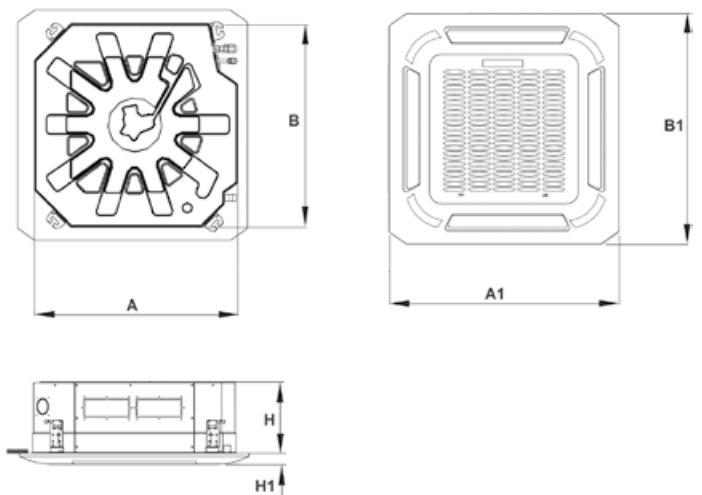











In accordance with the constant efforts to improve its range of products and thus raise the level of customer satisfaction, the Company stresses that the appearance and/or size, technical specifications and accessories may be subject to variation.

**Ferroli SpA**

37047 San Bonifacio (VR) Italy  
Via Ritonda 78/A  
Customer Service: +39 045 6179111  
Fax +39 045 6100233  
export@ferroli.com - www.ferroli.com