

# CALYPSO

## MID CAPACITY ELECTRIC WATER HEATER




- **Five bolt flange** of wide diameter, to ensure sturdiness and easy periodical maintenance
- Various models with capacity from 50 to 150 litres, both vertical and horizontal
- Five bolts flange element
- Temperature control through mechanical thermostat with probe
- Magnesium anode to protect the tank
- Temperature level indicator
- On/off light indicator
- Pressure relief valve set to 8 bar
- Manual external **temperature adjustment** (vertical model)

### VERSIONS:

**VE** - vertical, **HO** - horizontal

**CABLE / PLUG** as option

**Elements:** 0.8 - 4 kW - copper/stainless steel

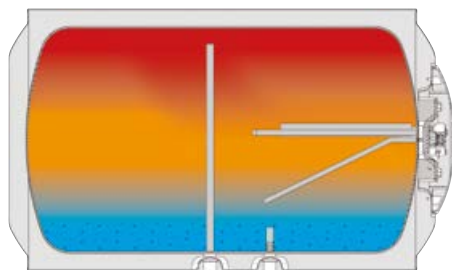

### HORIZONTAL

Recommended in confined spaces like false ceilings



### VERTICAL

Maximum stratification. Withdrawal of hot water from the warmest point in the tank

VERTICAL EXECUTION			50 VE/RE	80 VE/RE	100 VE/RE	120 VE/RE	150 VE/RE
DHW tapping profile			M	L	L	L	L
ERP Class	(G - A Class)		<b>C</b>	<b>C</b>	<b>C</b>	<b>C</b>	<b>C</b>
Capacity		litres	50	80	100	120	150
Power		W	1500	1500	1500	1500	1500
Heating time	$\Delta T$ 35° C	minutes	1 h 26'	2 h 18'	2 h 53'	3 h 28'	4 h 19'
	$\Delta T$ 45° C	minutes	1 h 51'	2 h 58'	3 h 42'	4 h 27'	5 h 34'
Weight		Kg	16	20,5	25	28,5	29,5

HORIZONTAL EXECUTION			50 HO	80 HO	100 HO	120 HO	150 HO
DHW tapping profile			M	M	L	L	L
ERP Class	(G - A Class)		<b>C</b>	<b>C</b>	<b>C</b>	<b>C</b>	<b>C</b>
Capacity		litres	50	80	100	120	150
Power		W	1500	1500	1500	1500	1500
Heating time	$\Delta T$ 35° C	minutes	1 h 26'	2 h 18'	2 h 53'	3 h 28'	4 h 19'
	$\Delta T$ 45° C	minutes	1 h 51'	2 h 58'	3 h 42'	4 h 27'	5 h 34'
Weight		Kg	16	20,5	25	28,5	29,5